


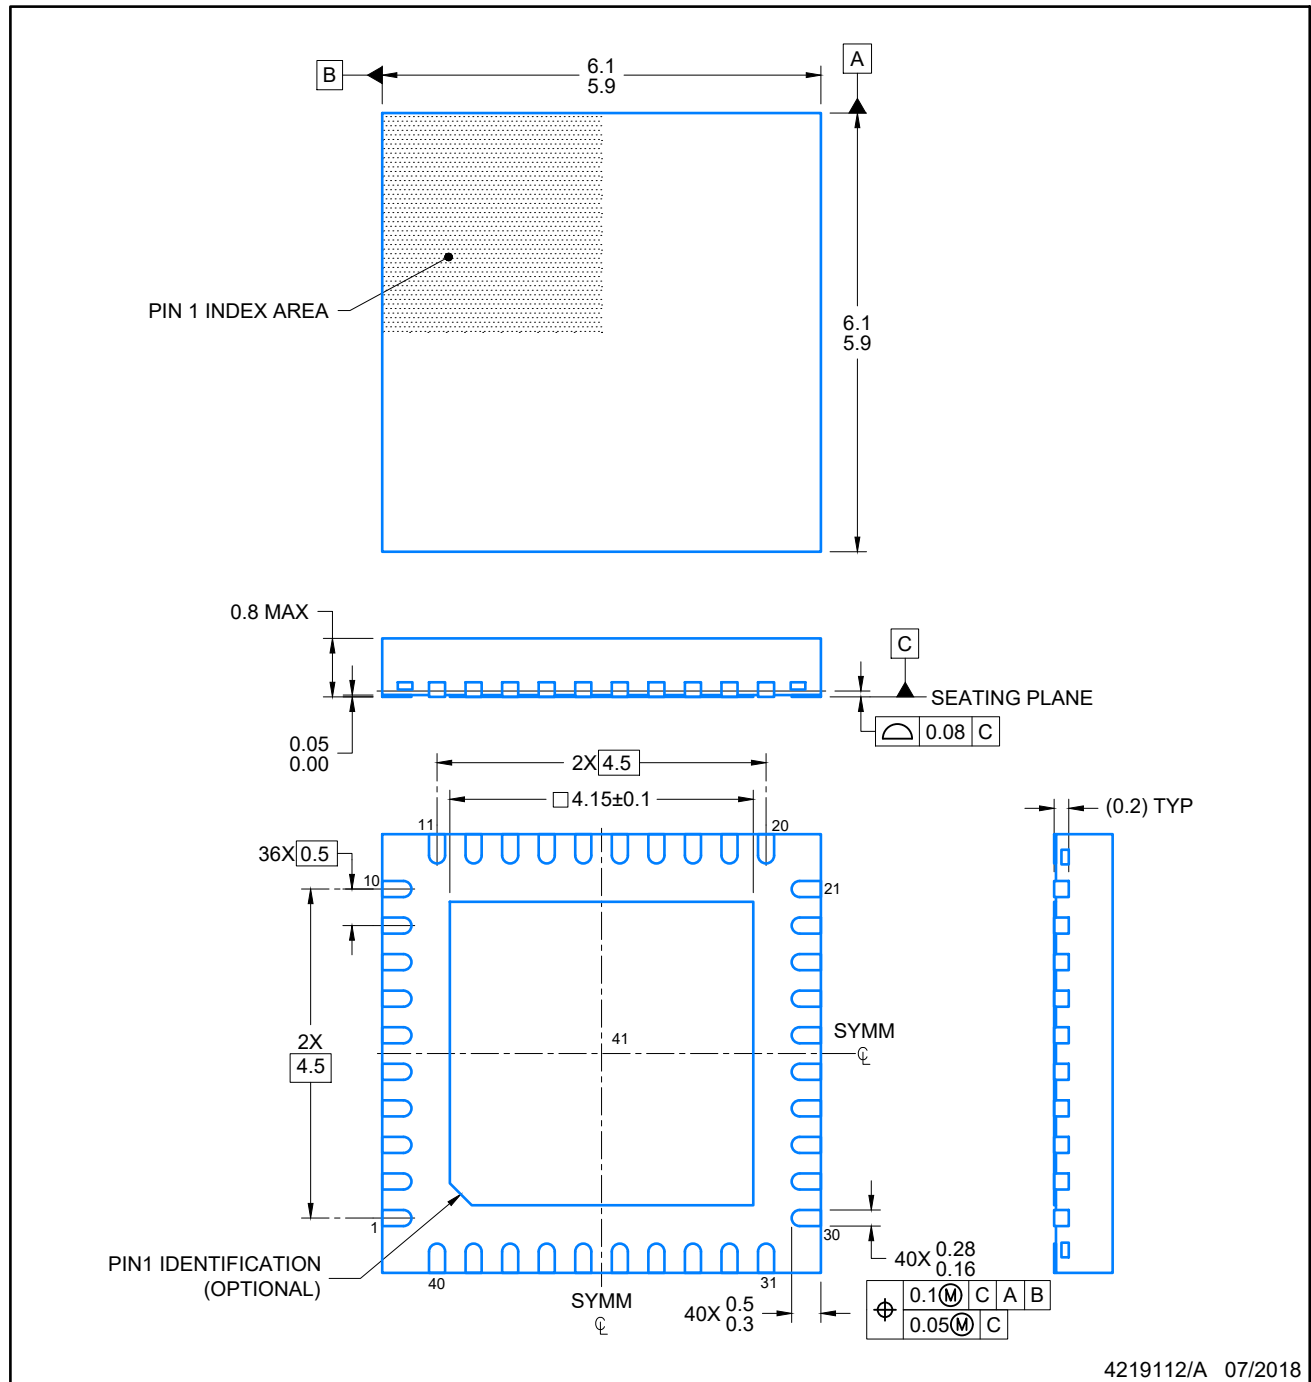

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

WQFN - 0.8 mm max height

40X (0.6)

40X (0.22)

36X (0.5)

SYMM

2X (0.685)

2X (1.14)

(R0.05) TYP

12X (Ø0.2) VIA TYP

2X (1.14)

2X (0.685)

SYMM

2X (5.8)

2X (4.5)

(□4.15)

40

31

30

41

2X (4.5)

2X (5.8)

21

20

11

10


1

The diagram illustrates two types of vias and their solder mask requirements:

- NON SOLDER MASK DEFINED (PREFERRED):** This type of via has a central pad of metal. The solder mask opening is defined by the metal pad. The distance from the metal pad to the edge of the solder mask opening is specified as **0.07 MAX ALL AROUND**. Labels include: **0.07 MAX ALL AROUND**, **EXPOSED METAL**, **SOLDER MASK OPENING**, **METAL**, and **NON SOLDER MASK DEFINED (PREFERRED)**.
- SOLDER MASK DEFINED:** This type of via has a central pad of metal. The solder mask opening is defined by the solder mask. The distance from the metal pad to the edge of the solder mask opening is specified as **0.07 MIN ALL AROUND**. Labels include: **0.07 MIN ALL AROUND**, **SOLDER MASK OPENING**, **EXPOSED METAL**, **METAL UNDER SOLDER MASK**, and **SOLDER MASK DEFINED**.

SOLDER MASK DETAILS

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

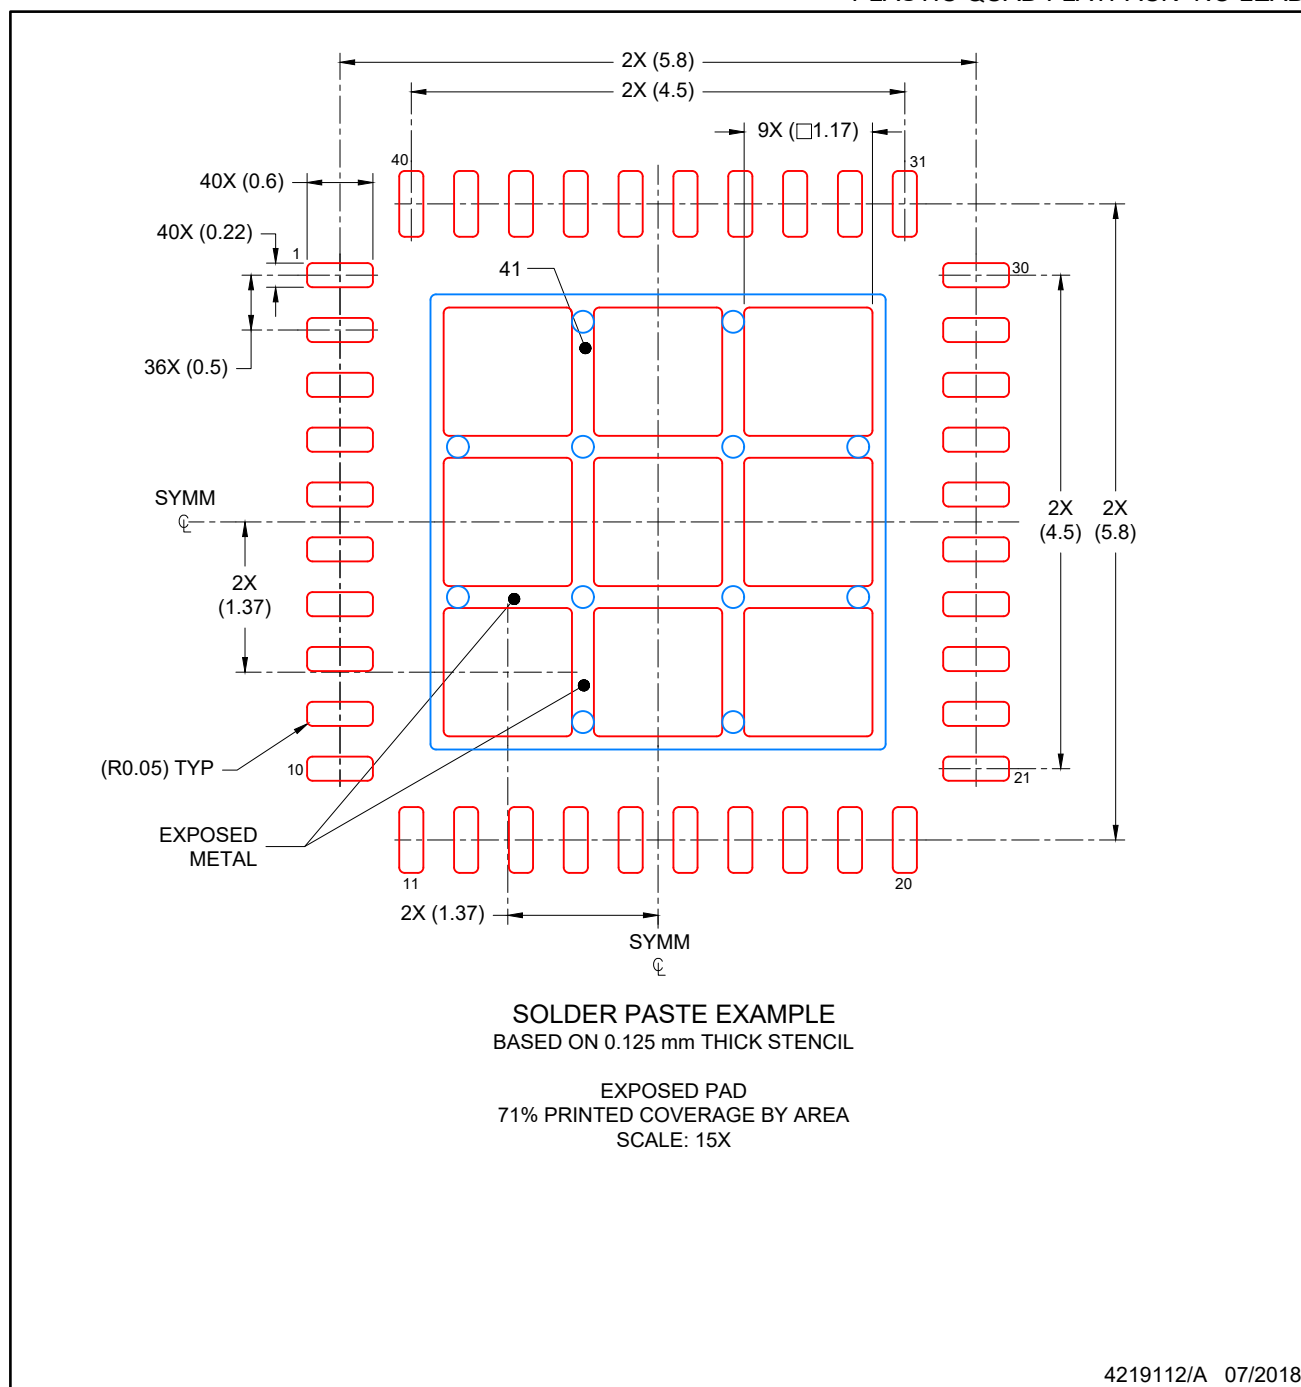

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.