



Upstream USB Port
The port connecting to the KVM control SBC (e.g. Orange Pi)

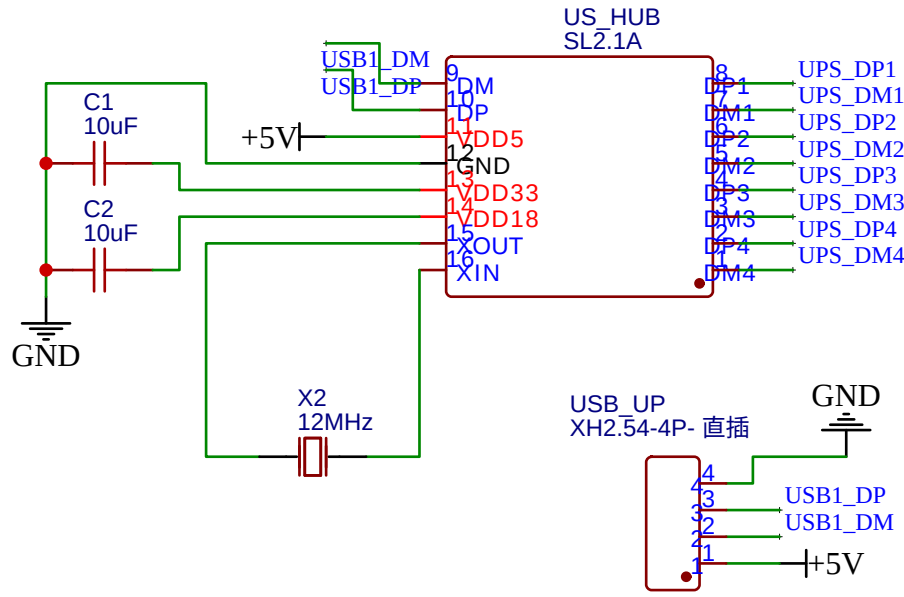


To CH552G
To USB HDMI Captuer
To CH340C & CH9329
To USB Mass Storage SW

Power Ripple Filter

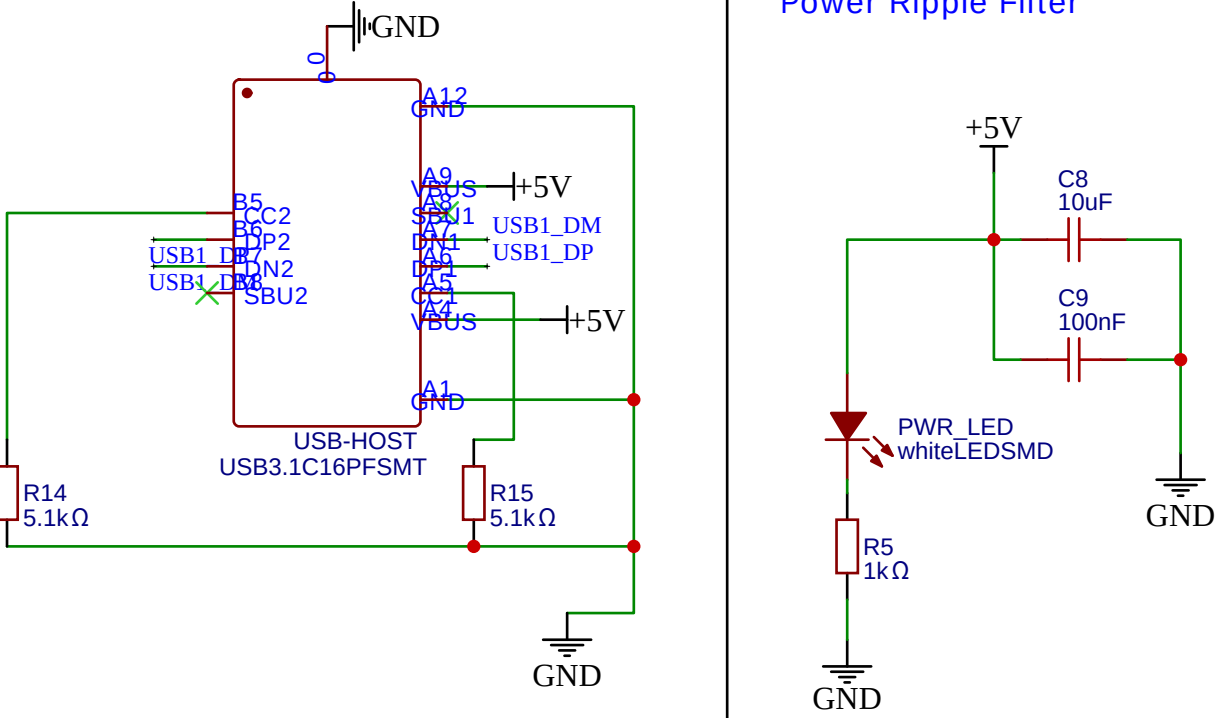


USB to UART
for KVM SBC sending ctrl-signal to KVM

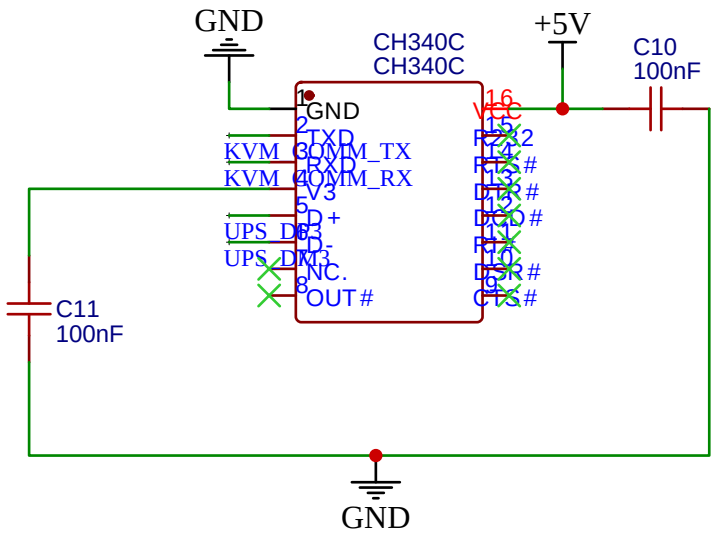


TITLE: KVM Hub		REV: 1.0
EasyEDA	Company: RemdesKVM	Sheet: 1/1
	Date: 2025-02-18 Drawn By: tobychui	

USB HDMI Capture Card



Connect MS2109 USB Capture Device

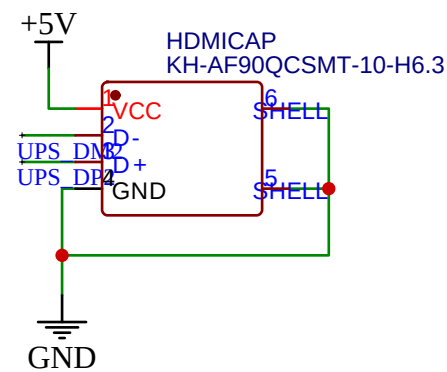

Guest USB Port (HID)
USB device mode for guest system (e.g. PC)

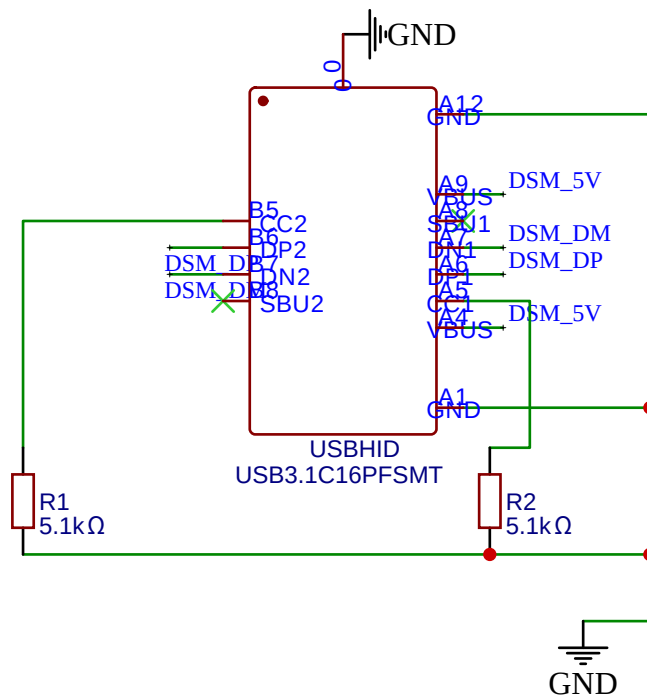

Guest USB Port (Mass Storage)
USB storage device

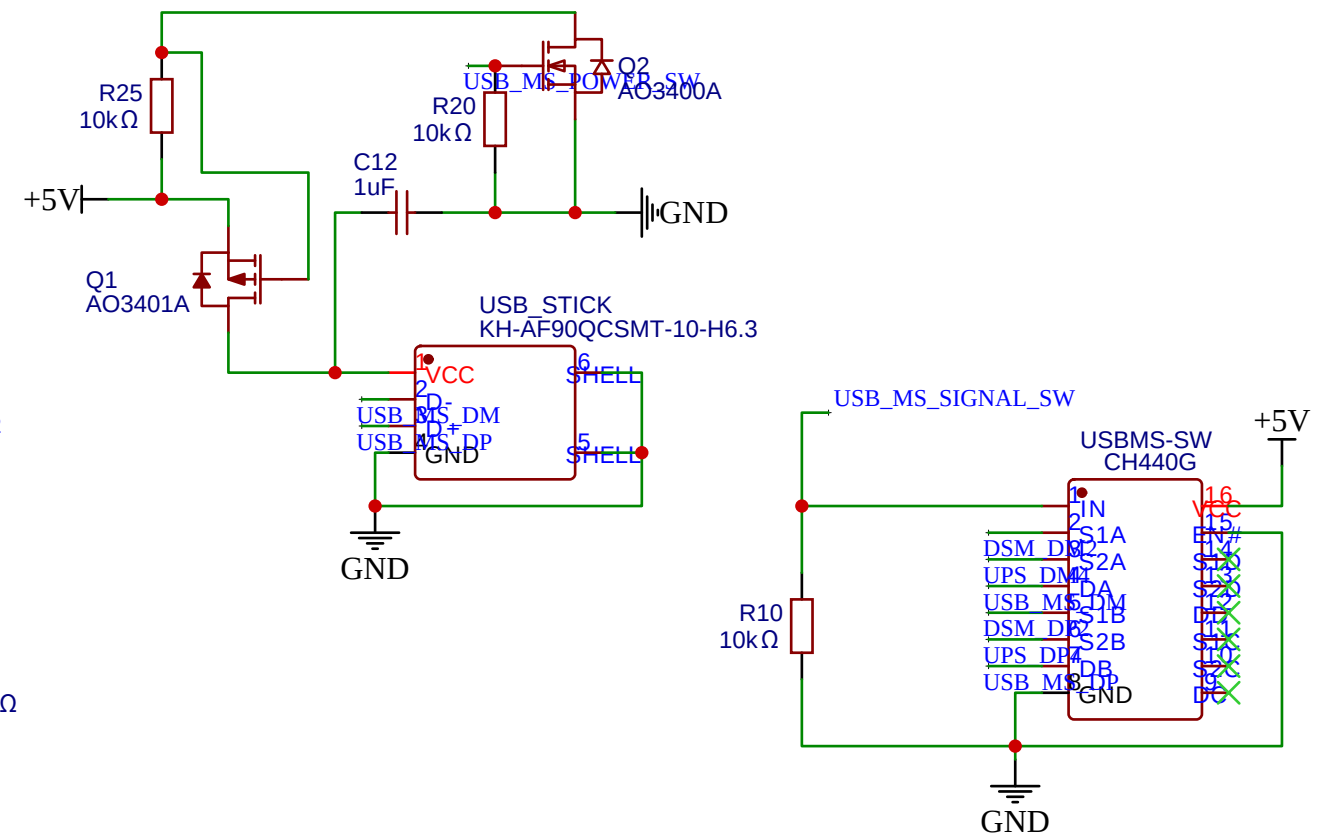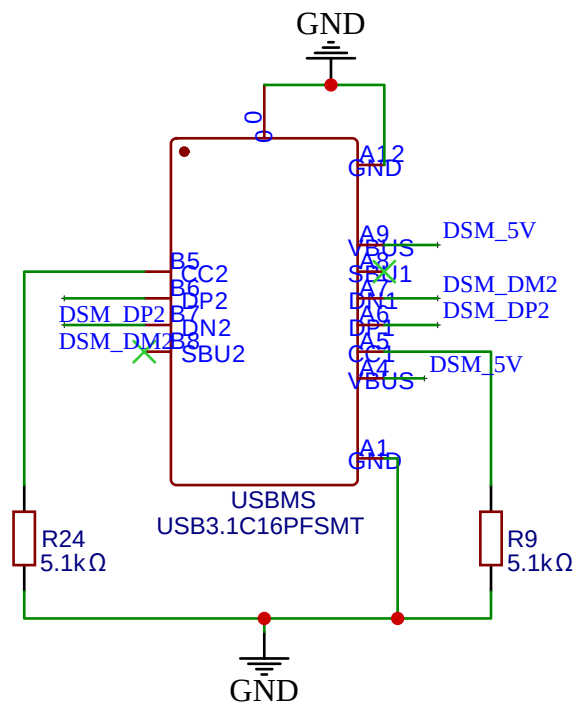

TITLE:

Guest Side

REV: 1.0



Company: imuslab

Sheet: 1/1

Date: 2025-02-20 Drawn By: tobychui

Notes: ATX_PWR_LED and ATX_HDD_LED default to LOW, active HIGH
This design should be compatible with PiKVM ATX Board Pinsout (Not Tested)

