


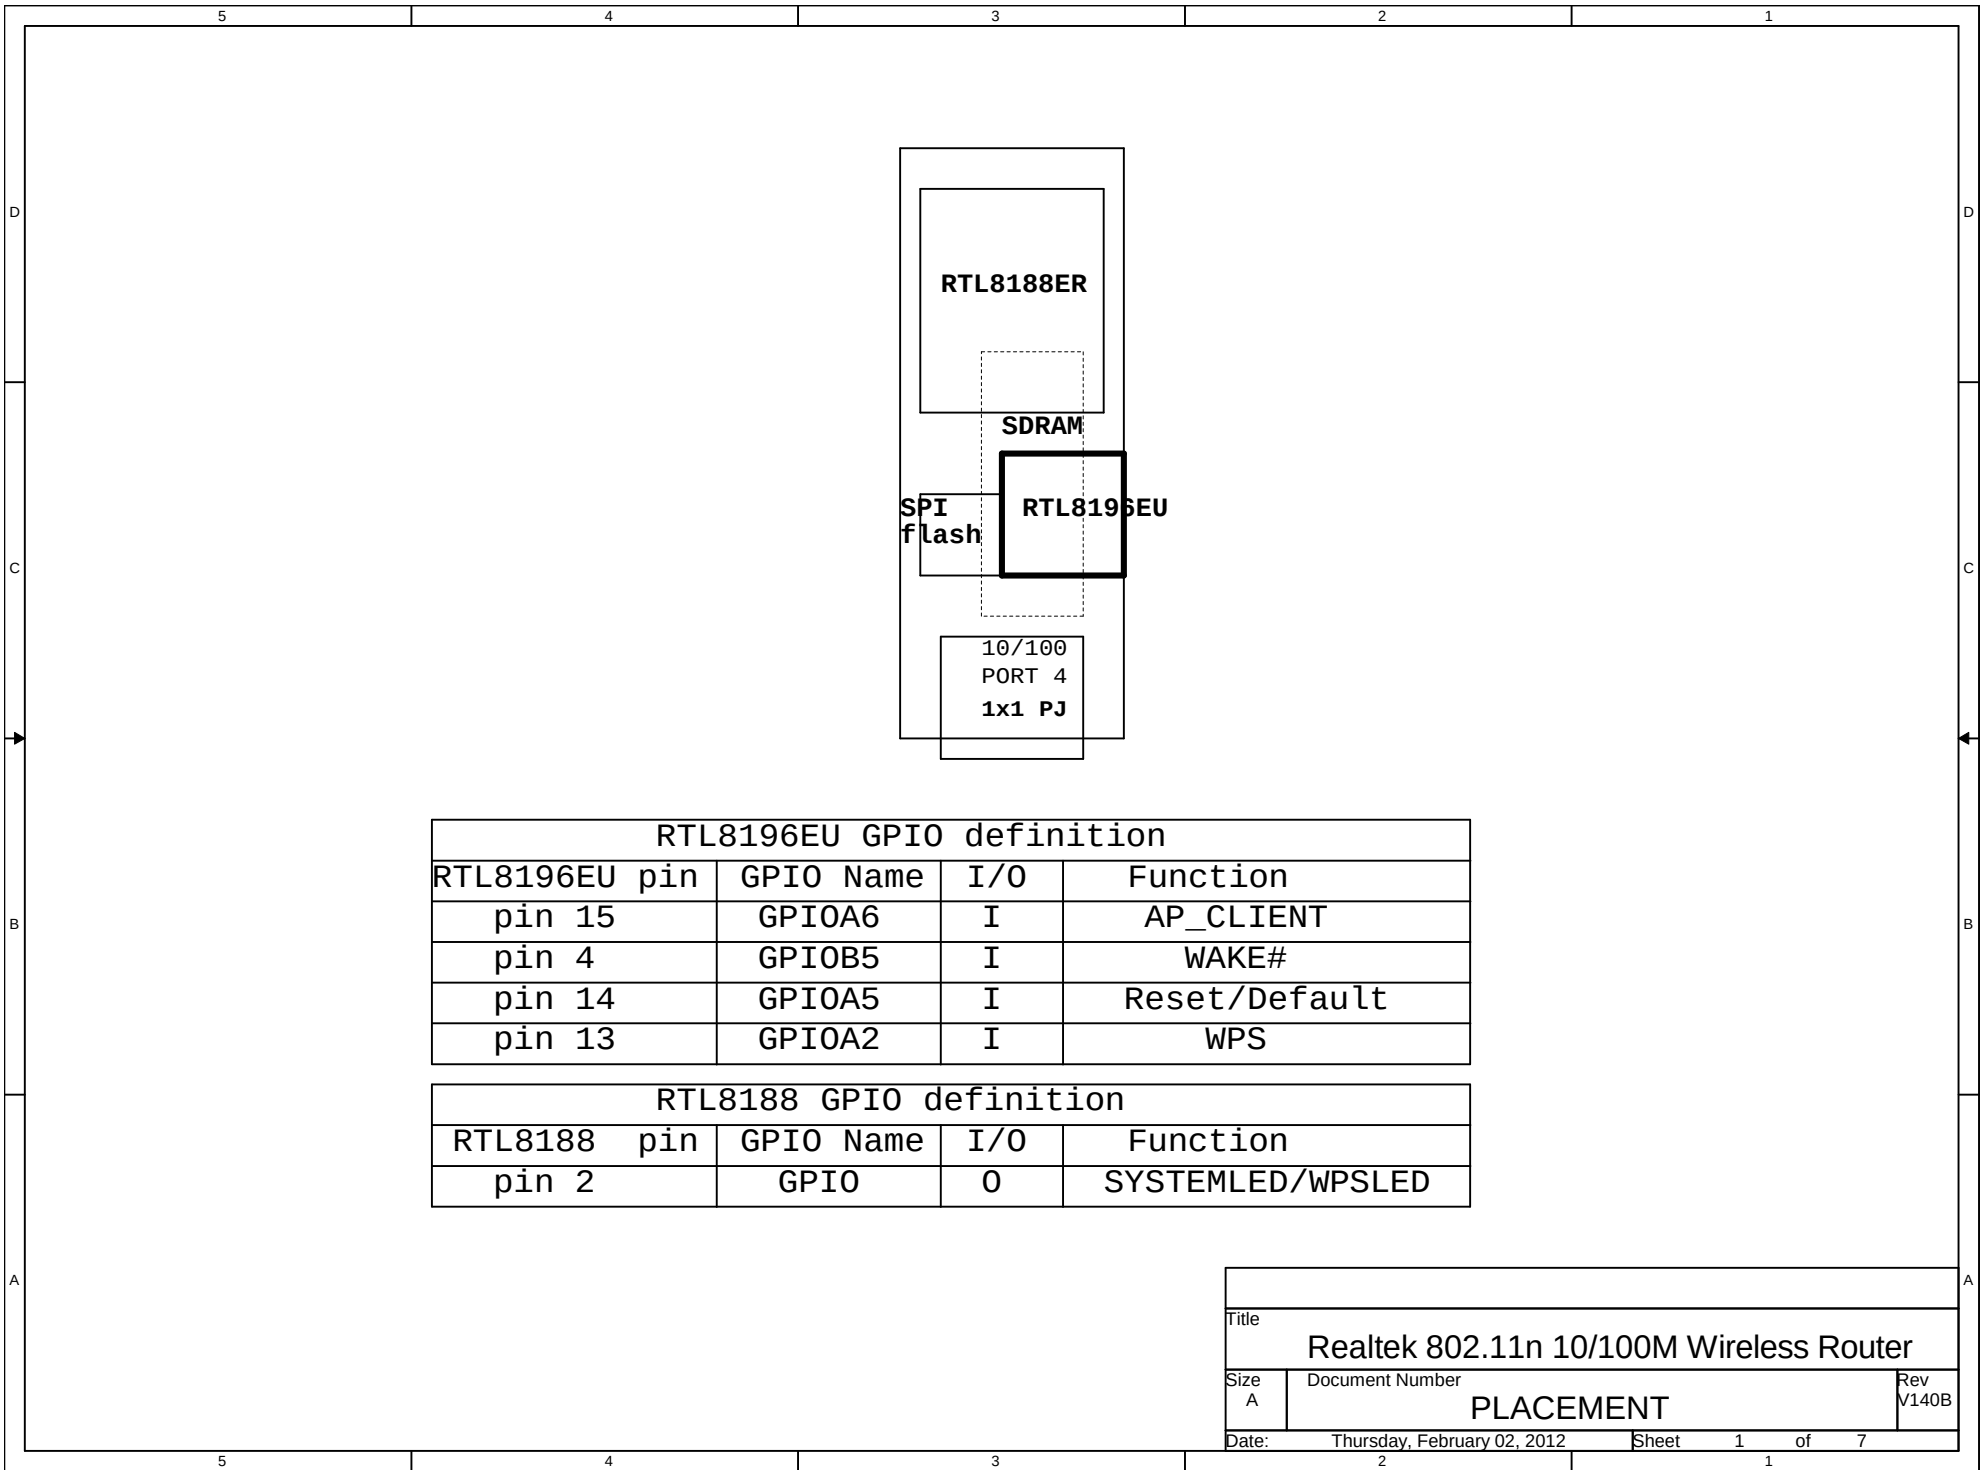

(5) RDIN4 >> RDIN4
(5) RDIP4 >> RDIP4
(5) TDON4 >> TDON4
(5) TDO4 >> TDO4

10/100M PHY
Interface

(3) MA4 >> MA4
(3) MA8 >> MA8
(3) MA9 >> MA9
(3) MA10 >> MA10
(3) MA11 >> MA11
(3) MA12 >> MA12
(3) BS0 >> BS0
(3) BS1 >> BS1
(3) U0TXD >> U0TXD

Configure
Interface

(4) AP_CLIENT >> AP_CLIENT
(4) GPIOA5 >> GPIOA5
(4) GPIOA2 >> GPIOA2
(4) USB1_DN >> USB1_DN
(4) USB1_DP >> USB1_DP

GPIO and USB

LED Interface

(4) LED_PORT4 >> LED_PORT4








C224, C229 close to U17

HSIN >> HSIN
HSIP >> HSIP
HSIN >> HSIN
HSIP >> HSIP


(6) PERSTB >> PERSTB
(6) CLK+_HOST >> CLK+_HOST
(6) CLK-_HOST >> CLK-_HOST
(6) HSIN >> HSIN
(6) HSOP >> HSOP
(6) HSIN >> HSIN
(6) HSIP >> HSIP

(6) CK_40M >> CK_40M


Input (6) WAKE# >> WAKE#

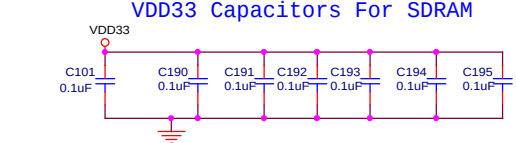


RTL8196EU_QFN88

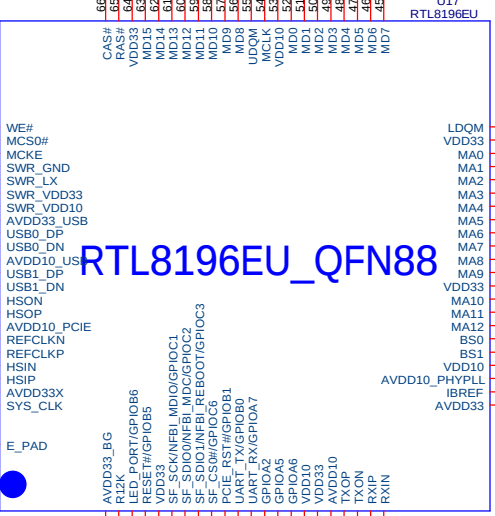

32M 16bit SDRAM x1

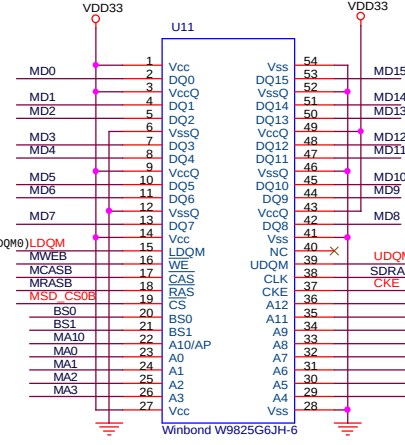

R201 49.9 ohms for
lowing EMI


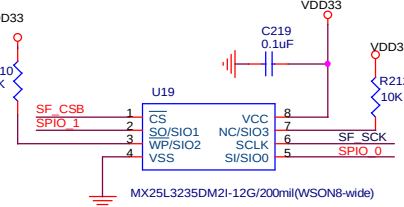


8 pins SPI Flash
Only for Single
I/O or Dual I/O

UART
NC/HEADER 4X1 (pitch=1.27mm)

Title			
Realtek 802.11n 10/100M Wireless Router			
Size	Document Number	Rev	
Custom	CPU/SDRAM/FLASH	V140B	
Date:	Thursday, February 02, 2012	Sheet	2 of 7

Strap Pin Definition









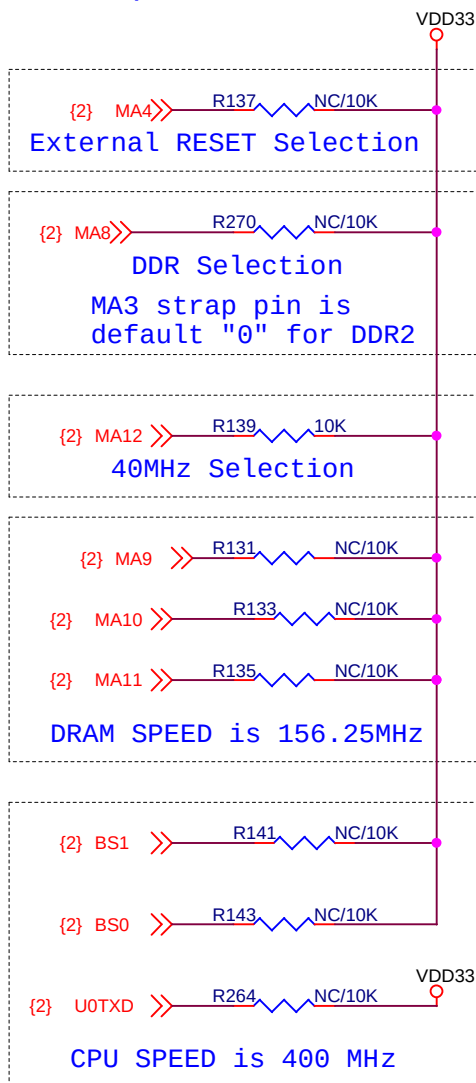


pin name	function name	function detail
PIN_M_A4	ENABLE_EXT_RSTN	ENABLE_EXT_RSTN
		1=enable 0=disable
PIN_M_A8	DRAM_TYPE[1]	DRAM_TYPE[1]
		1=DDR 0=SDR (Default)
PIN_M_A3	DRAM_TYPE[0]_INV	DRAM_TYPE[0]_INV
		1=DDR1 0=DDR2 (Default)
PIN_M_A12	sel_40m	1=40MHZ 0=25MHZ(default)




		ck_m2x_freq_sel[2:0] (MHZ)	
PIN_M_A9	ck_m2x_freq_sel[0]	000: 156.25	100: Reserved
PIN_M_A10	ck_m2x_freq_sel[1]	001: Reserved	101: 125
PIN_M_A11	ck_m2x_freq_sel[2]	010: Reserved	110: Reserved
		011: Reserved	111: 168.75

		ck_cpu_freq_sel[3:1] (MHZ)	
DDR_BS1	ck_cpu_freq_sel[3]	000: 400MHZ	100: 320MHZ
DDR_BS0	ck_cpu_freq_sel[2]	001: 380MHZ	101: 300MHZ
U0TXD	ck_cpu_freq_sel[1]	010: 360MHZ	110: 280MHZ
		011: 340MHZ	111: 260MHZ


Title		
Realtek 802.11n 10/100M Wireless Router		
Size A	Document Number Configure Interface	Rev V140B
Date: Thursday, February 02, 2012	Sheet 3	of 7

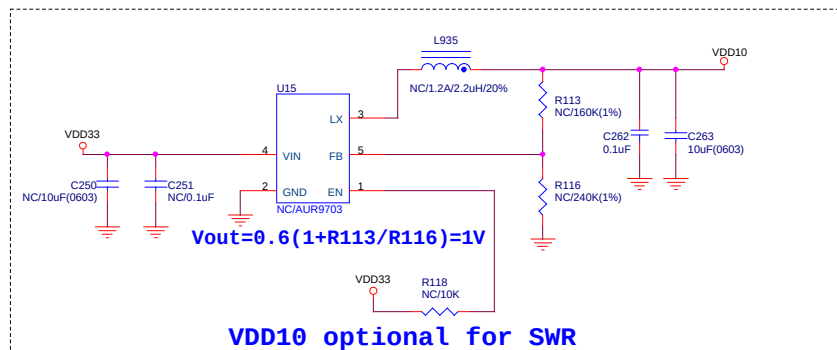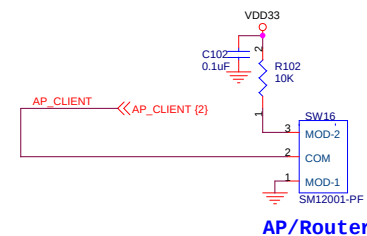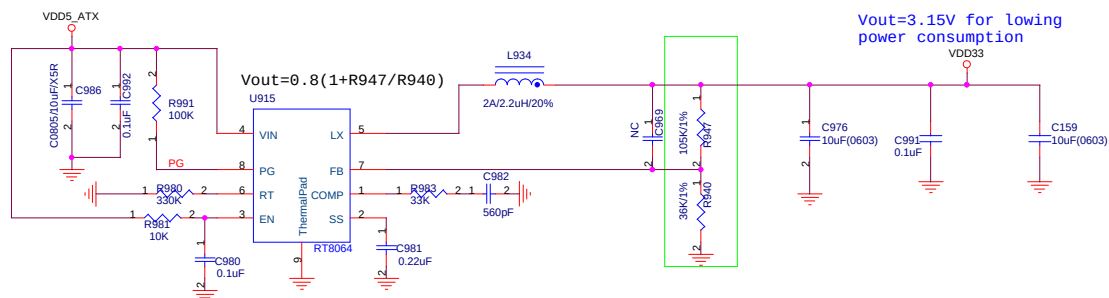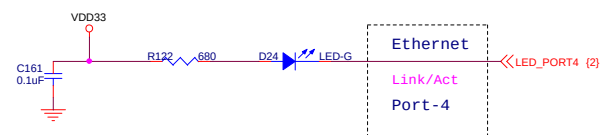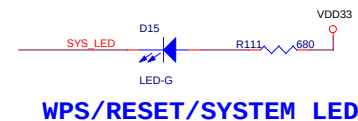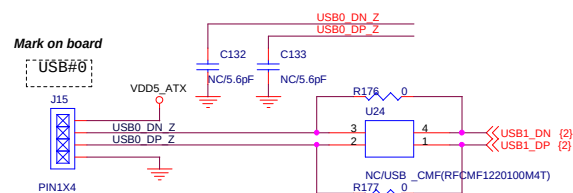

Title			
Realtek 802.11n 10/100M Wireless Router			
Size	Document Number	Rev	
Custm	POWER/LEDs	V140B	
Date:	Thursday, February 02, 2012	Sheet	1 of 7



Title				
Realtek 802.11n 10/100M Wireless Router				
Size B	Document Number			Rev V120
	MDI 10/100M			
Date:	Thursday, February 02, 2012	Sheet	5	of 11

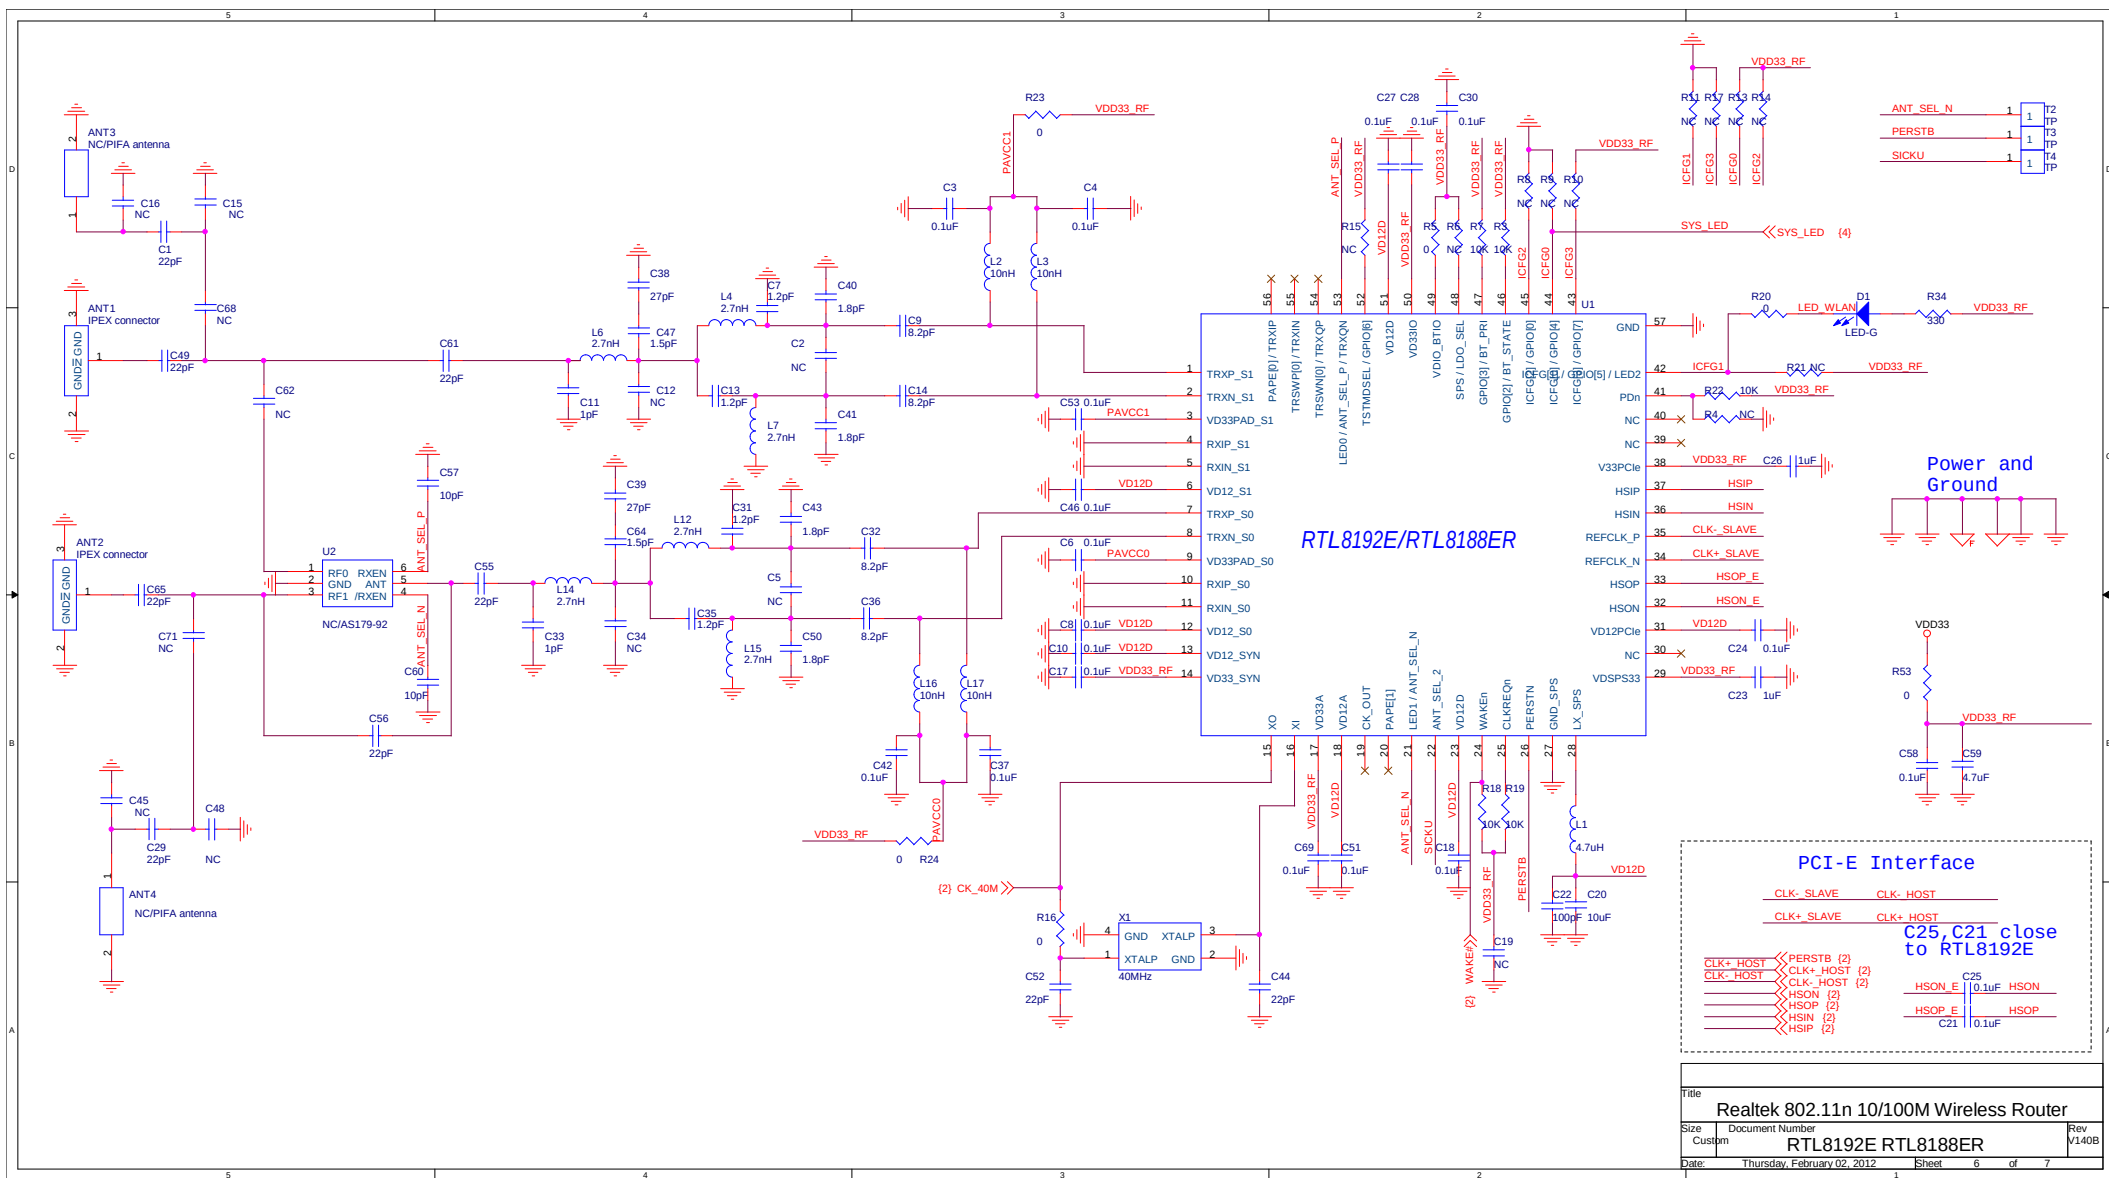

Version	Major change	Issue date
V140B	First issue	2/2/2012

Title Realtek 802.11n 10/100M Wireless Router			
Size A	Document Number Version Changed History		Rev V140B
Date:	Thursday, February 02, 2012	Sheet	7 of 7