
ROM cartridge

Two EEPROMs copied into two SRAMs at power-up by the loader PLD (ROM.md, "Loading the cartridge")

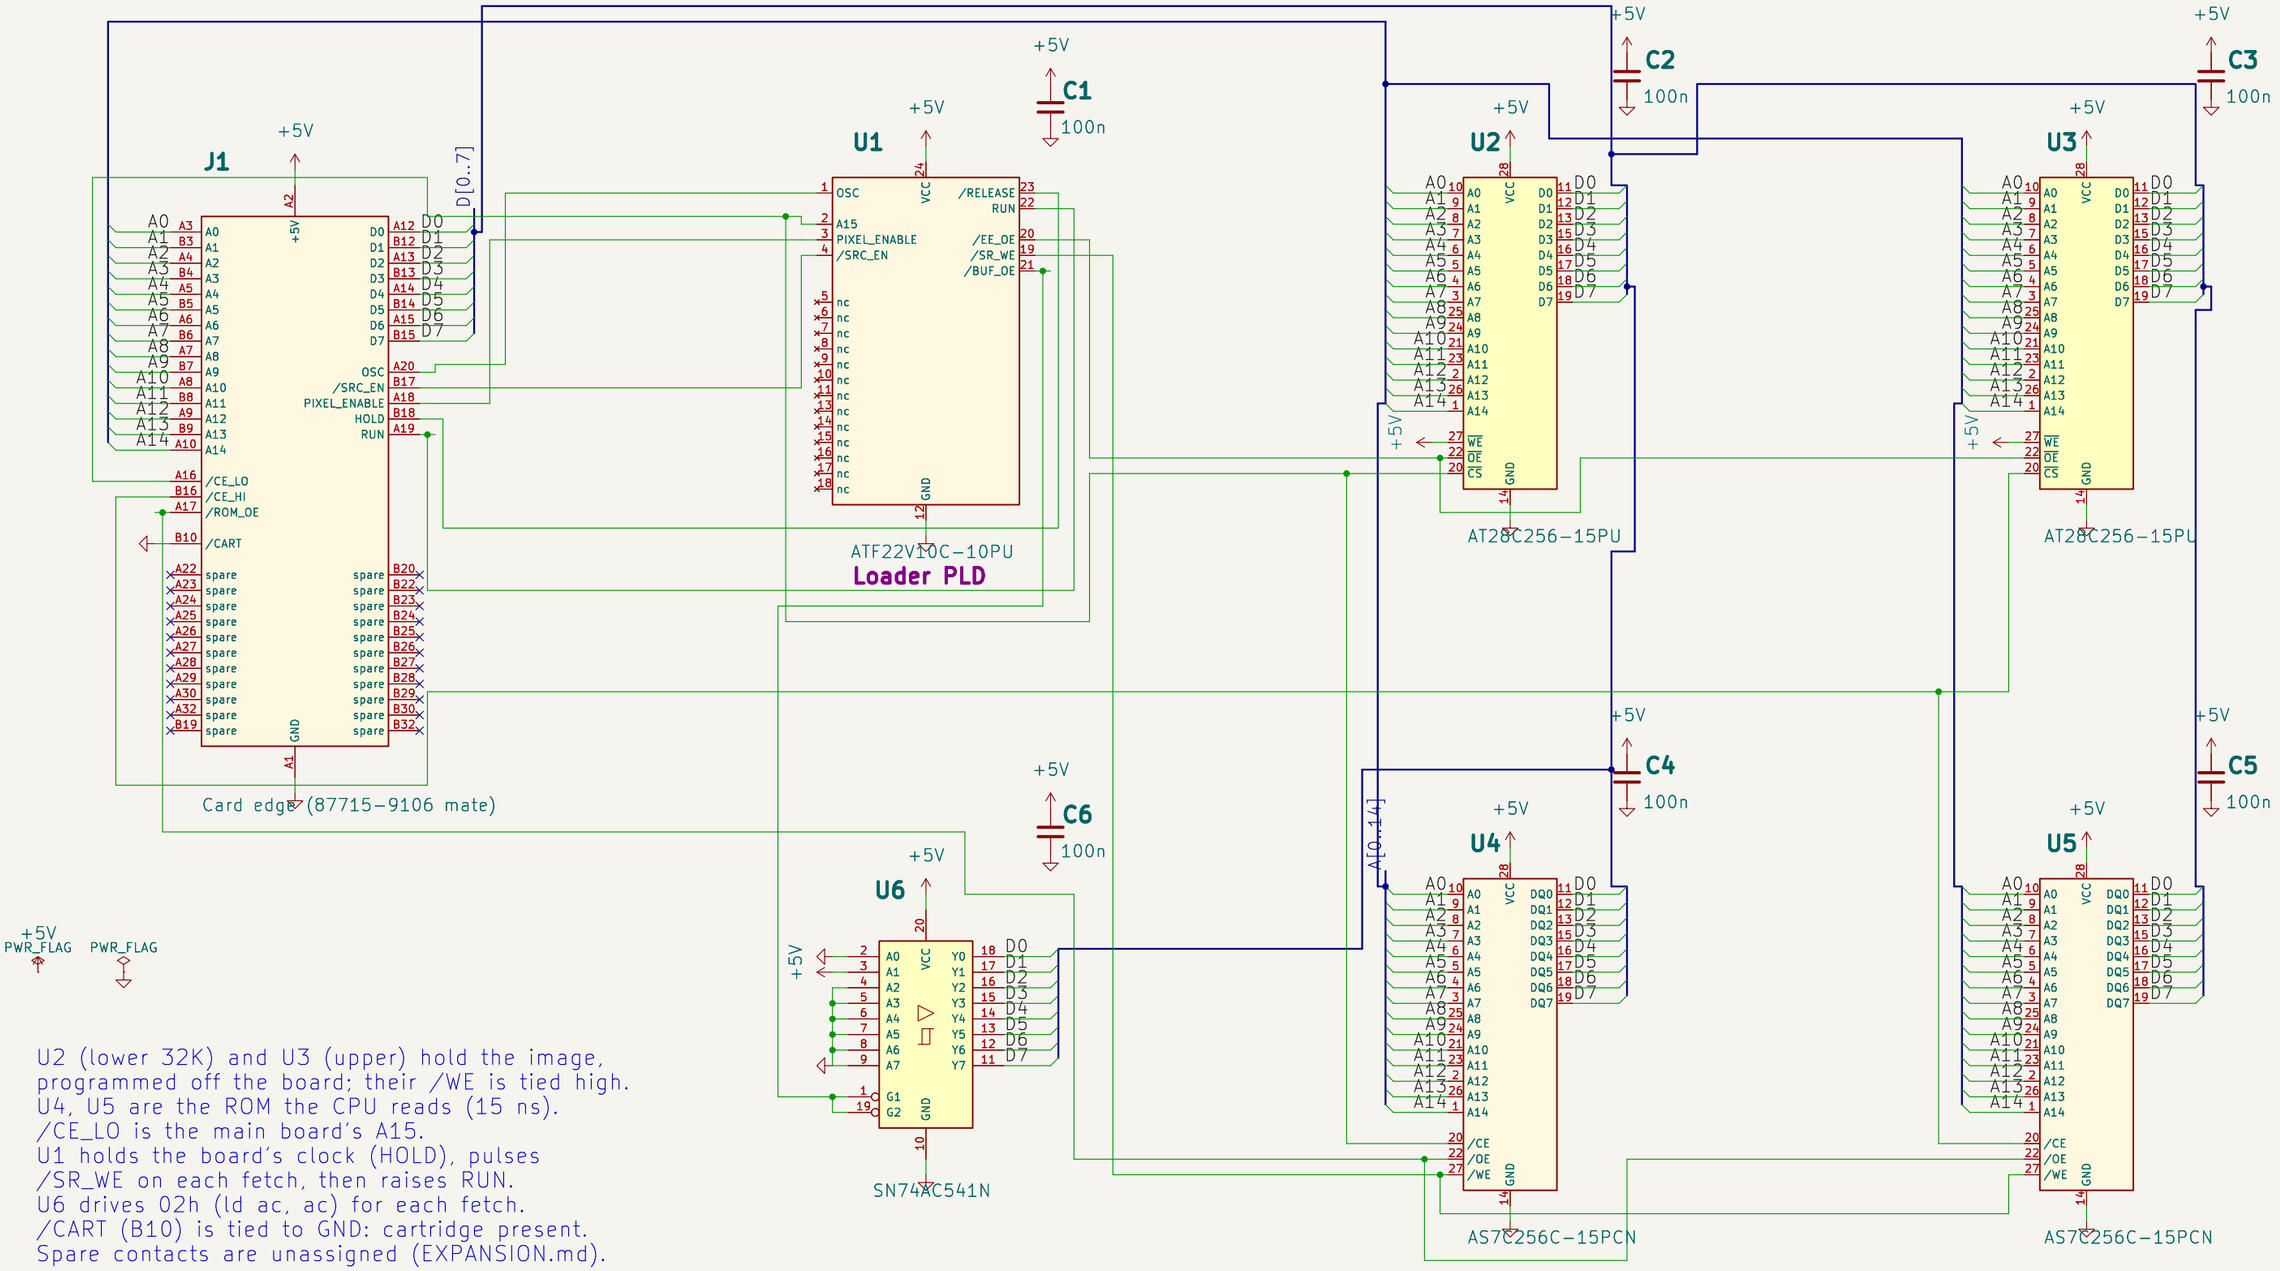

U2 (lower 32K) and U3 (upper) hold the image, programmed off the board; their /WE is tied high. U4, U5 are the ROM the CPU reads (15 ns). /CE_LO is the main board's A15. U1 holds the board's clock (HOLD), pulses /SR_WE on each fetch, then raises RUN. U6 drives 02h (ld ac, ac) for each fetch. /CART (B10) is tied to GND: cartridge present. Spare contacts are unassigned (EXPANSION.md).

Cartridge chips U1–U6 (docs/CHIPS.md, ROM cartridge); decoupling Cn goes with Un
Generated by src/scripts/gen_kicad_schematic.py; plan in docs/SCHEMATIC_PLAN.md

Placard computer

Sheet: /
File: cartridge.kicad_sch

Title: Placard: ROM cartridge

Size: A3	Date: 2026-10-21	**Rev: 1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1