
ROM cartridge, 32K

One EEPROM copied into one SRAM at power-up by the loader PLD (ROM.md, "Loading the cartridge")

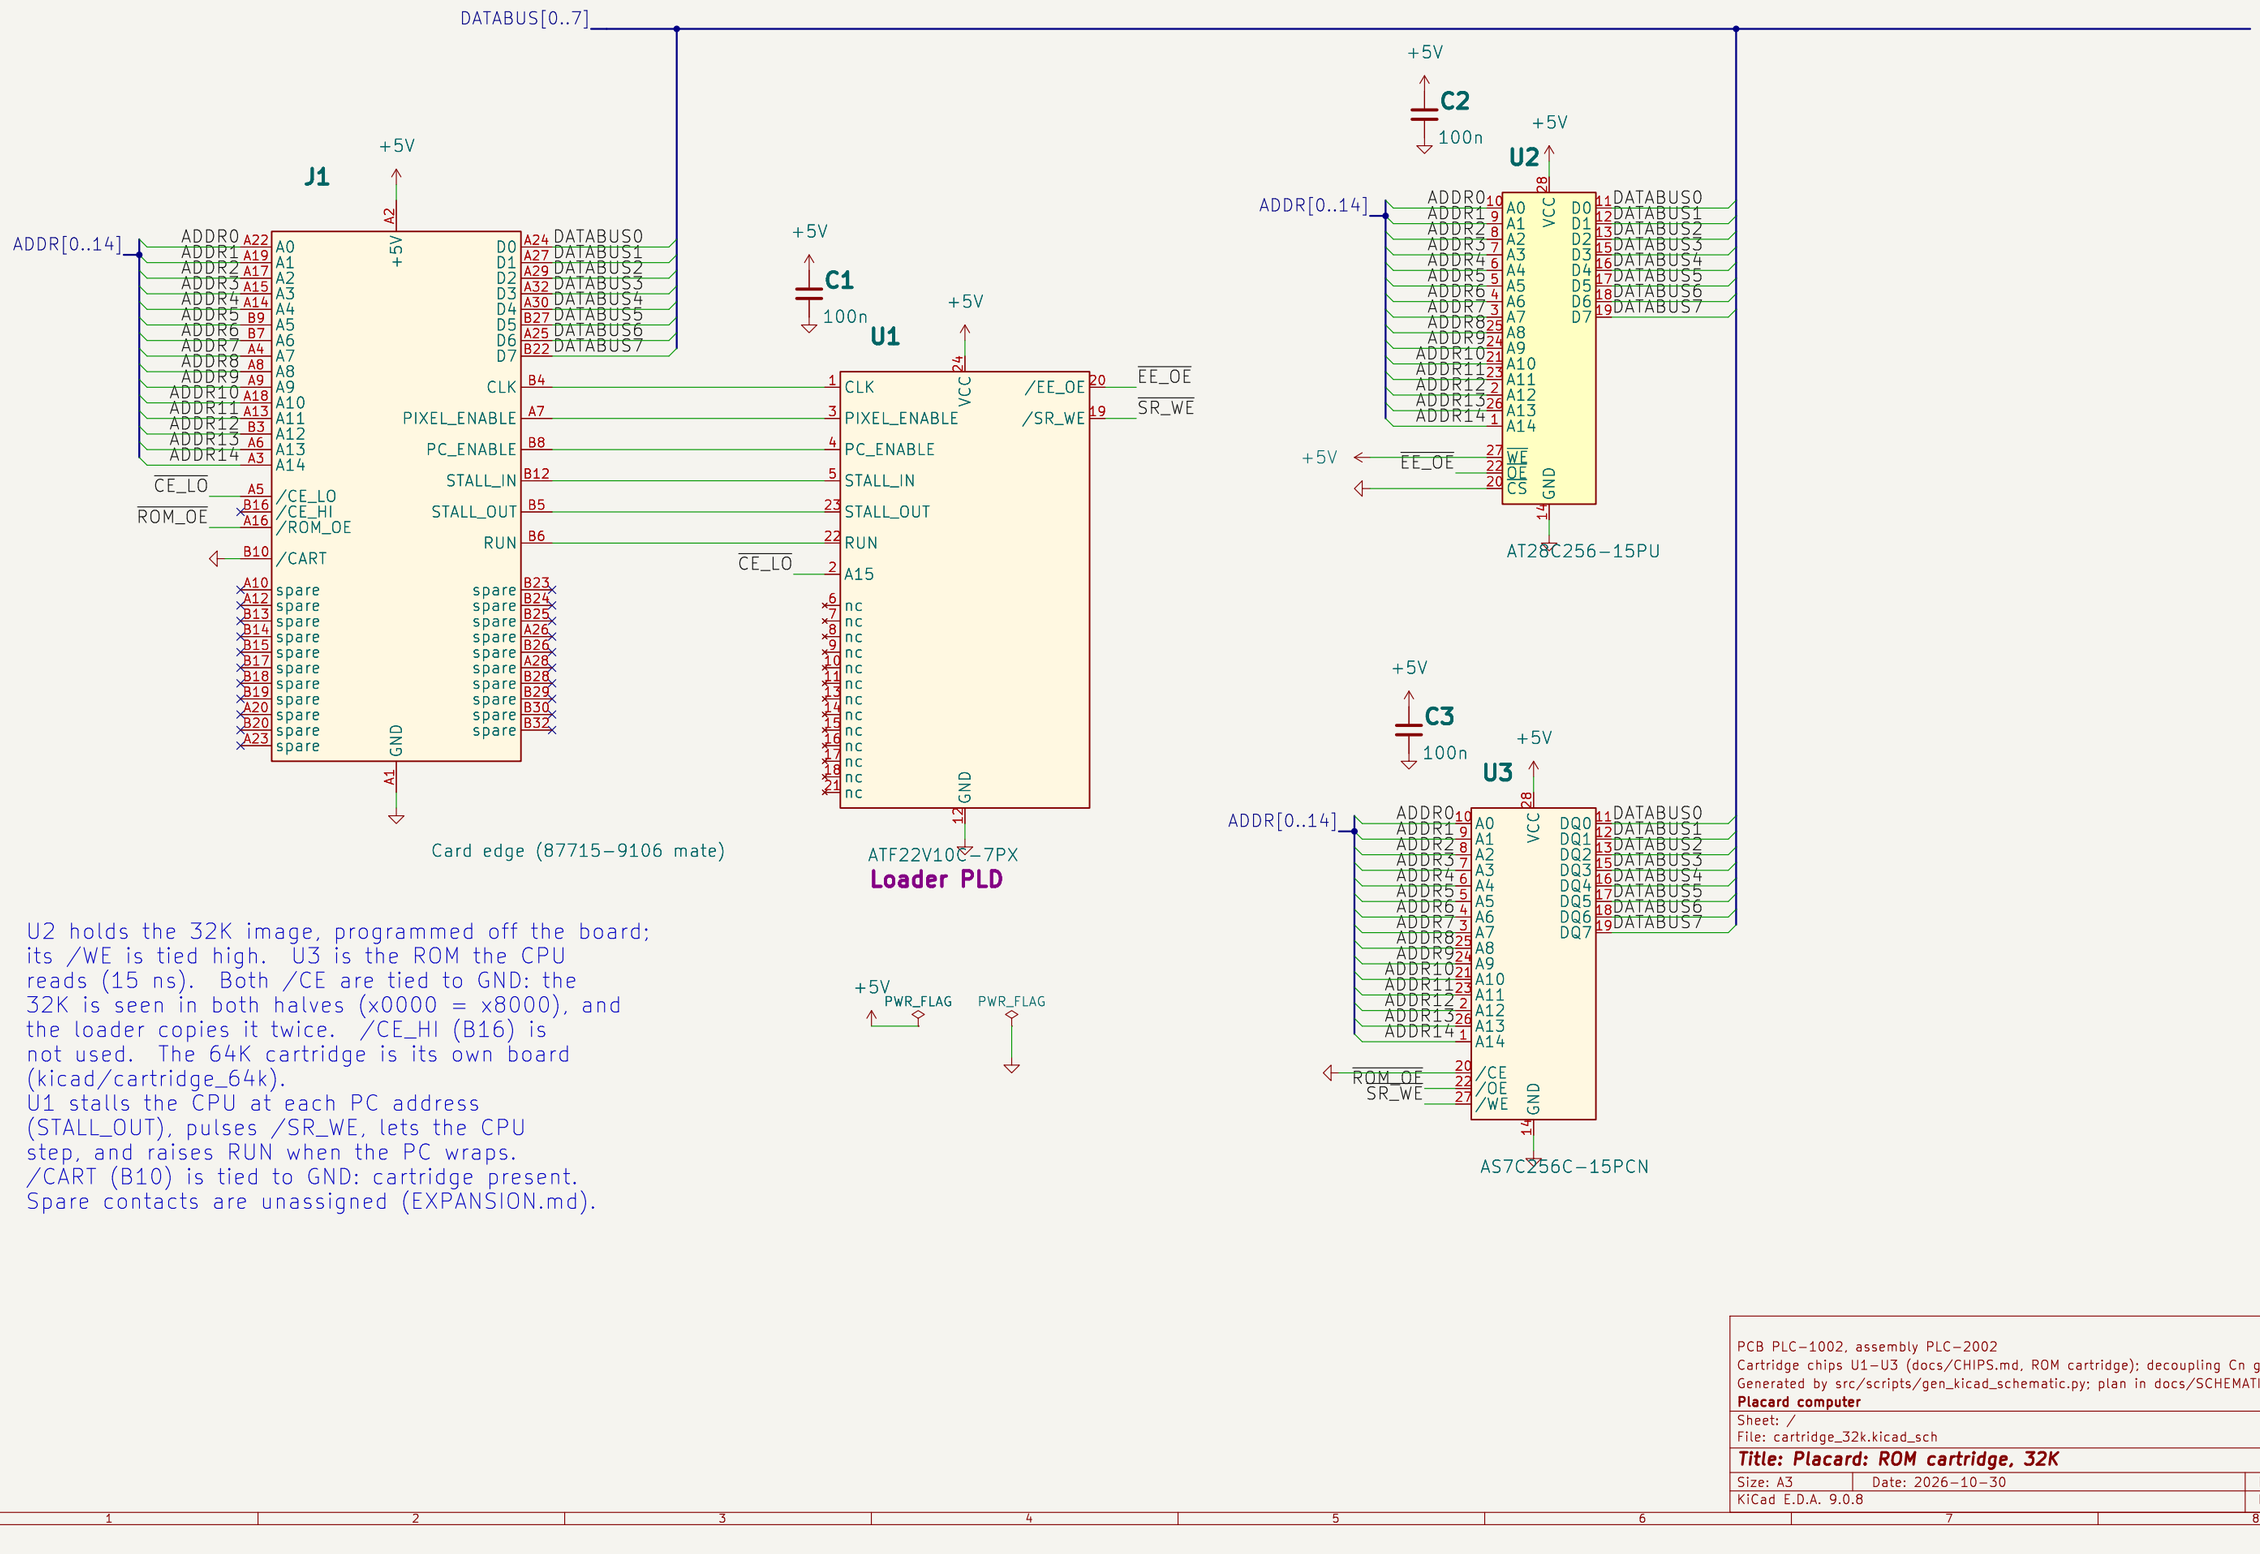

Card edge (87715-9106 mate)

U2 holds the 32K image, programmed off the board; its /WE is tied high. U3 is the ROM the CPU reads (15 ns). Both /CE are tied to GND: the 32K is seen in both halves (x0000 = x8000), and the loader copies it twice. /CE_HI (B16) is not used. The 64K cartridge is its own board (kicad/cartridge_64k).
U1 stalls the CPU at each PC address (STALL_OUT), pulses /SR_WE, lets the CPU step, and raises RUN when the PC wraps.
/CART (B10) is tied to GND: cartridge present.
Spare contacts are unassigned (EXPANSION.md).

PCB PLC-1002, assembly PLC-2002
Cartridge chips U1-U3 (docs/CHIPS.md, ROM cartridge); decoupling Cn goes with Un
Generated by src/scripts/gen_kicad_schematic.py; plan in docs/SCHEMATIC_PLAN.md
Placard computer

Sheet: /
File: cartridge_32k.kicad_sch

Title: Placard: ROM cartridge, 32K

Size: A3	Date: 2026-10-30	**Rev: A**
KiCad E.D.A. 9.0.8		Id: 1/1