
Tray: floor, front and right walls (2 bends) - flat pattern, inside face up (mm)

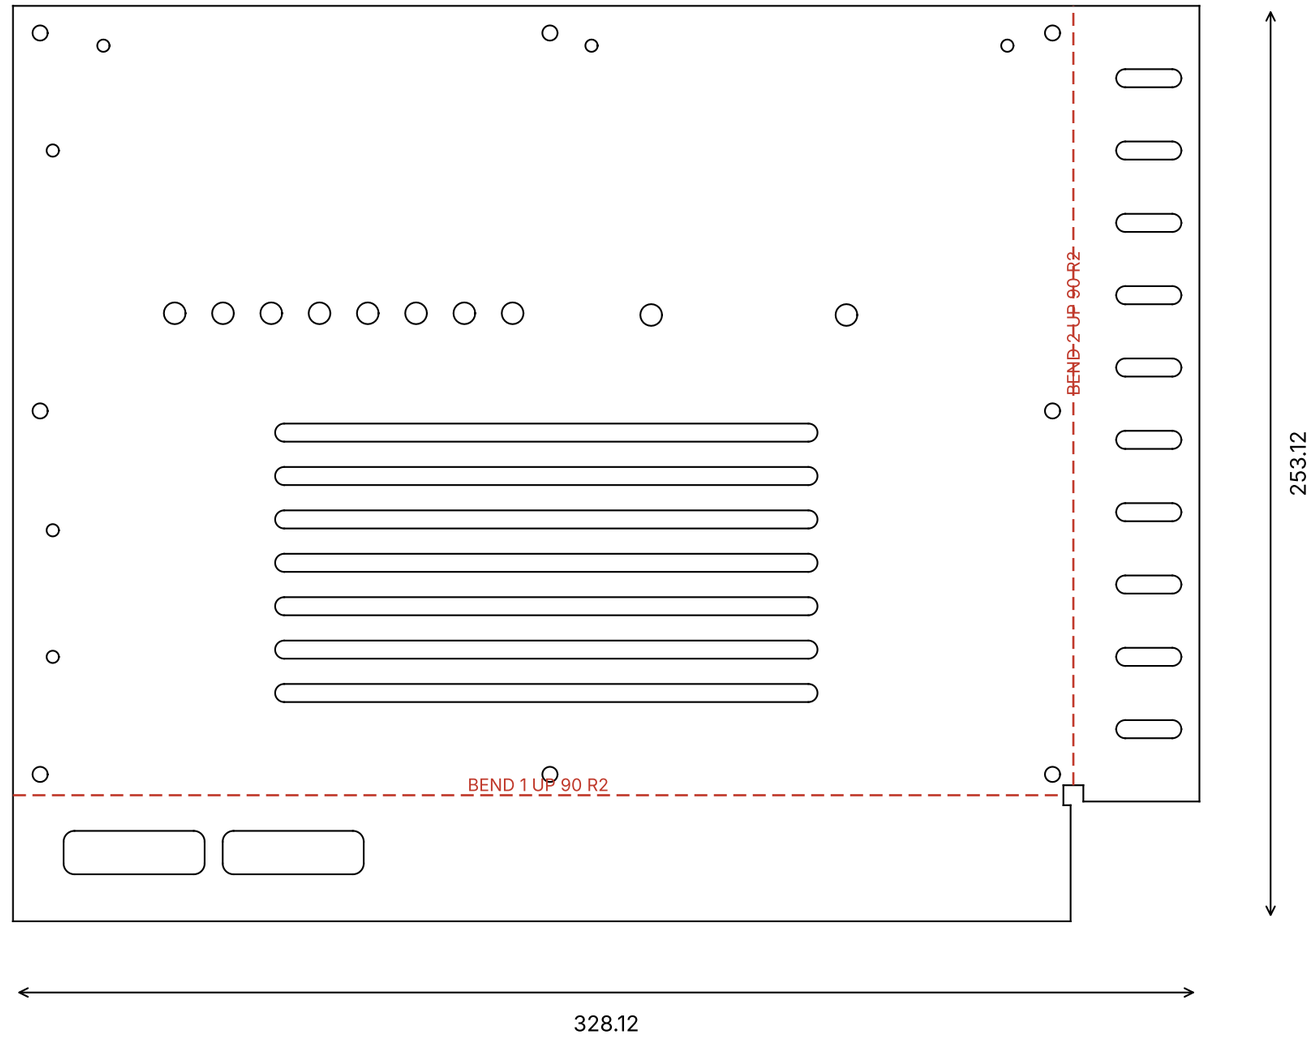

Material: Aluminium 5052-H32, 2.0 mm (0.080 in)
Finish: Black powder coat, stock color, texture or matte, both sides; mask PEM threads
Process: laser cut, bend (press brake), PEM insertion, powder coat
Quantity: 1 per case (quote 1, 10 and 100)
Bends: 2 x 90 deg, inside radius 2.0 mm
Hardware: 8 x PEM SO-M3-6 (through-threaded standoff, 6 mm), 4.2 mm holes at the board holes H1-H8, pressed from the underside (head flush underneath, standoff up into the case)
Hardware: 6 x 3.4 mm holes with a 90 deg countersink, 6.5 mm on the underside (M3 flat head screws into the plates)
Hardware: 10 x 6.0 mm holes for the steel parking discs (the builder presses them in; no hardware)
Round holes: 6 x 3.40 mm, 8 x 4.20 mm, 10 x 6.00 mm
Tolerances: Laser cut features +/-0.1 mm, holes +0.1/-0 mm
Tolerances: Bends 90 deg +/-0.5 deg, inside radius 2.0 mm, flange lengths +/-0.25 mm
Tolerances: Unless shown: ISO 2768-m; break sharp edges
Tolerances: Flat pattern for reference: K = 0.44, bend allowance 4.524 mm, bend deduction 3.476 mm; develop from the STEP with your own bend table
Bend lines (red, dashed) at the middle of each bend; all bends up toward the viewer.
STEP and DXF of the same part: case/quote/step, case/quote/dxf.