
Tray: floor, front and right walls (2 bends) - flat pattern, inside face up (mm)

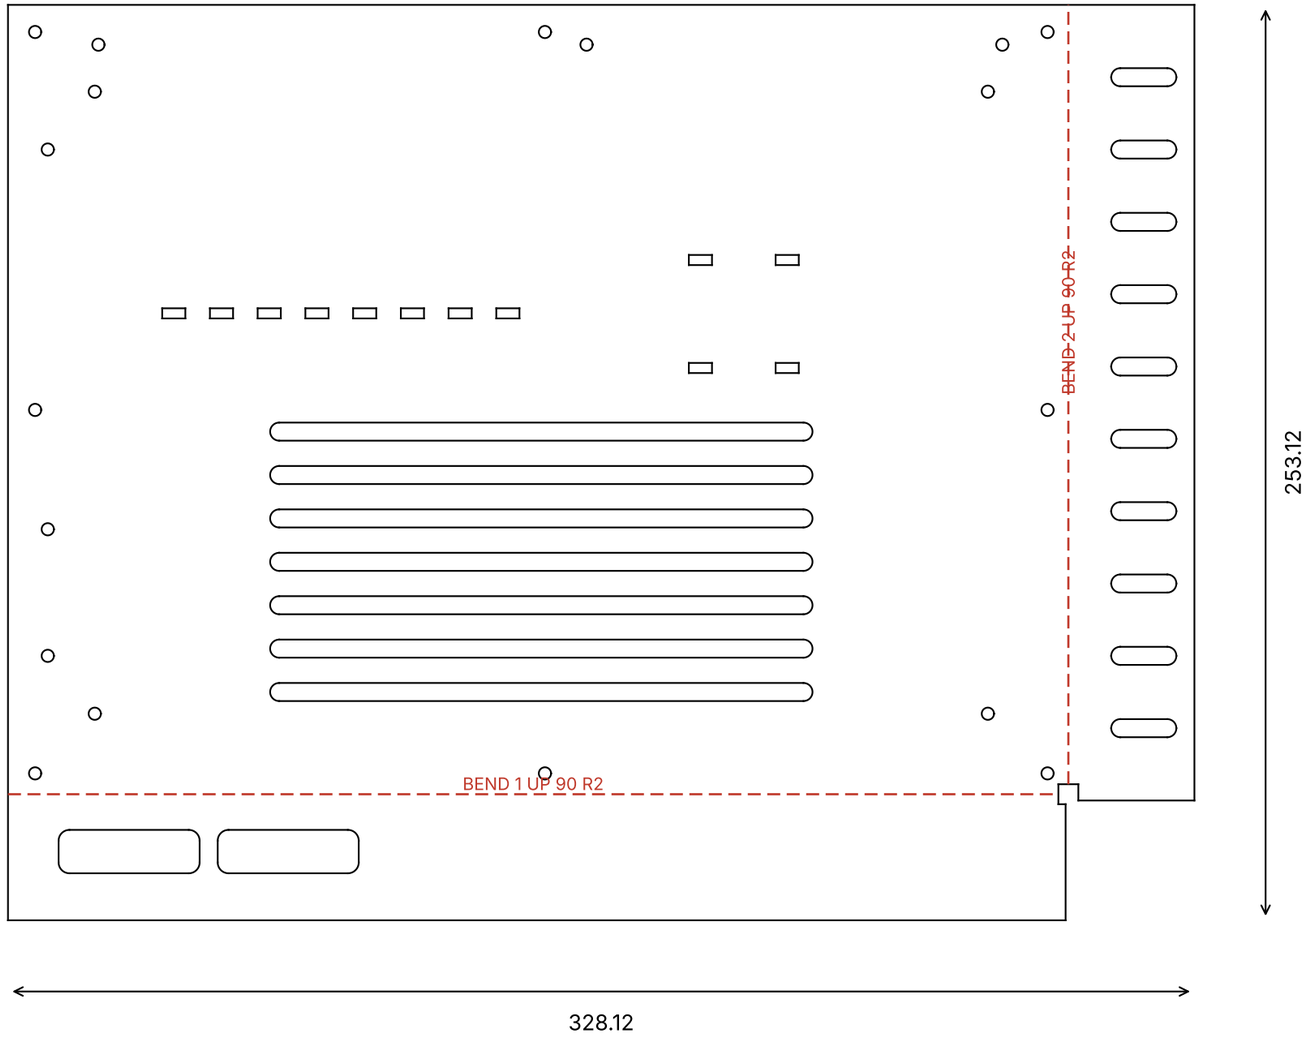

Material: Aluminium 5052-H32, 2.0 mm (0.080 in)
Finish: Black powder coat, stock color, texture or matte, both sides
Process: laser cut, bend (press brake), countersink, powder coat
Quantity: 1 per case (quote 1, 10 and 100)
Bends: 2 x 90 deg, inside radius 2.0 mm
Hardware: No PEM hardware in the tray.
Hardware: 14 x 3.4 mm holes with a 90 deg countersink, 6.5 mm on the underside (M3 flat head screws: 8 at the board holes H1-H8 into the floor standoffs, 6 through the plates' flanges into nuts)
Hardware: 4 x 3.4 mm plain holes (no countersink) at the feet, 24 mm in from each corner
Hardware: 10 small slots, 6.4 wide, for the printed covers' tabs (parking under the case)
Round holes: 18 x 3.40 mm
Tolerances: Laser cut features +/-0.1 mm, holes +0.1/-0 mm
Tolerances: Bends 90 deg +/-0.5 deg, inside radius 2.0 mm, flange lengths +/-0.25 mm
Tolerances: Unless shown: ISO 2768-m; break sharp edges
Tolerances: Flat pattern for reference: K = 0.44, bend allowance 4.524 mm, bend deduction 3.476 mm; develop from the STEP with your own bend table
Bend lines (red, dashed) at the middle of each bend; all bends up toward the viewer.
STEP and DXF of the same part: case/quote/step, case/quote/dxf.