




O SERIES

DROP
KIOSIDIS S.A.

DROP
KIOSIDIS S.A.

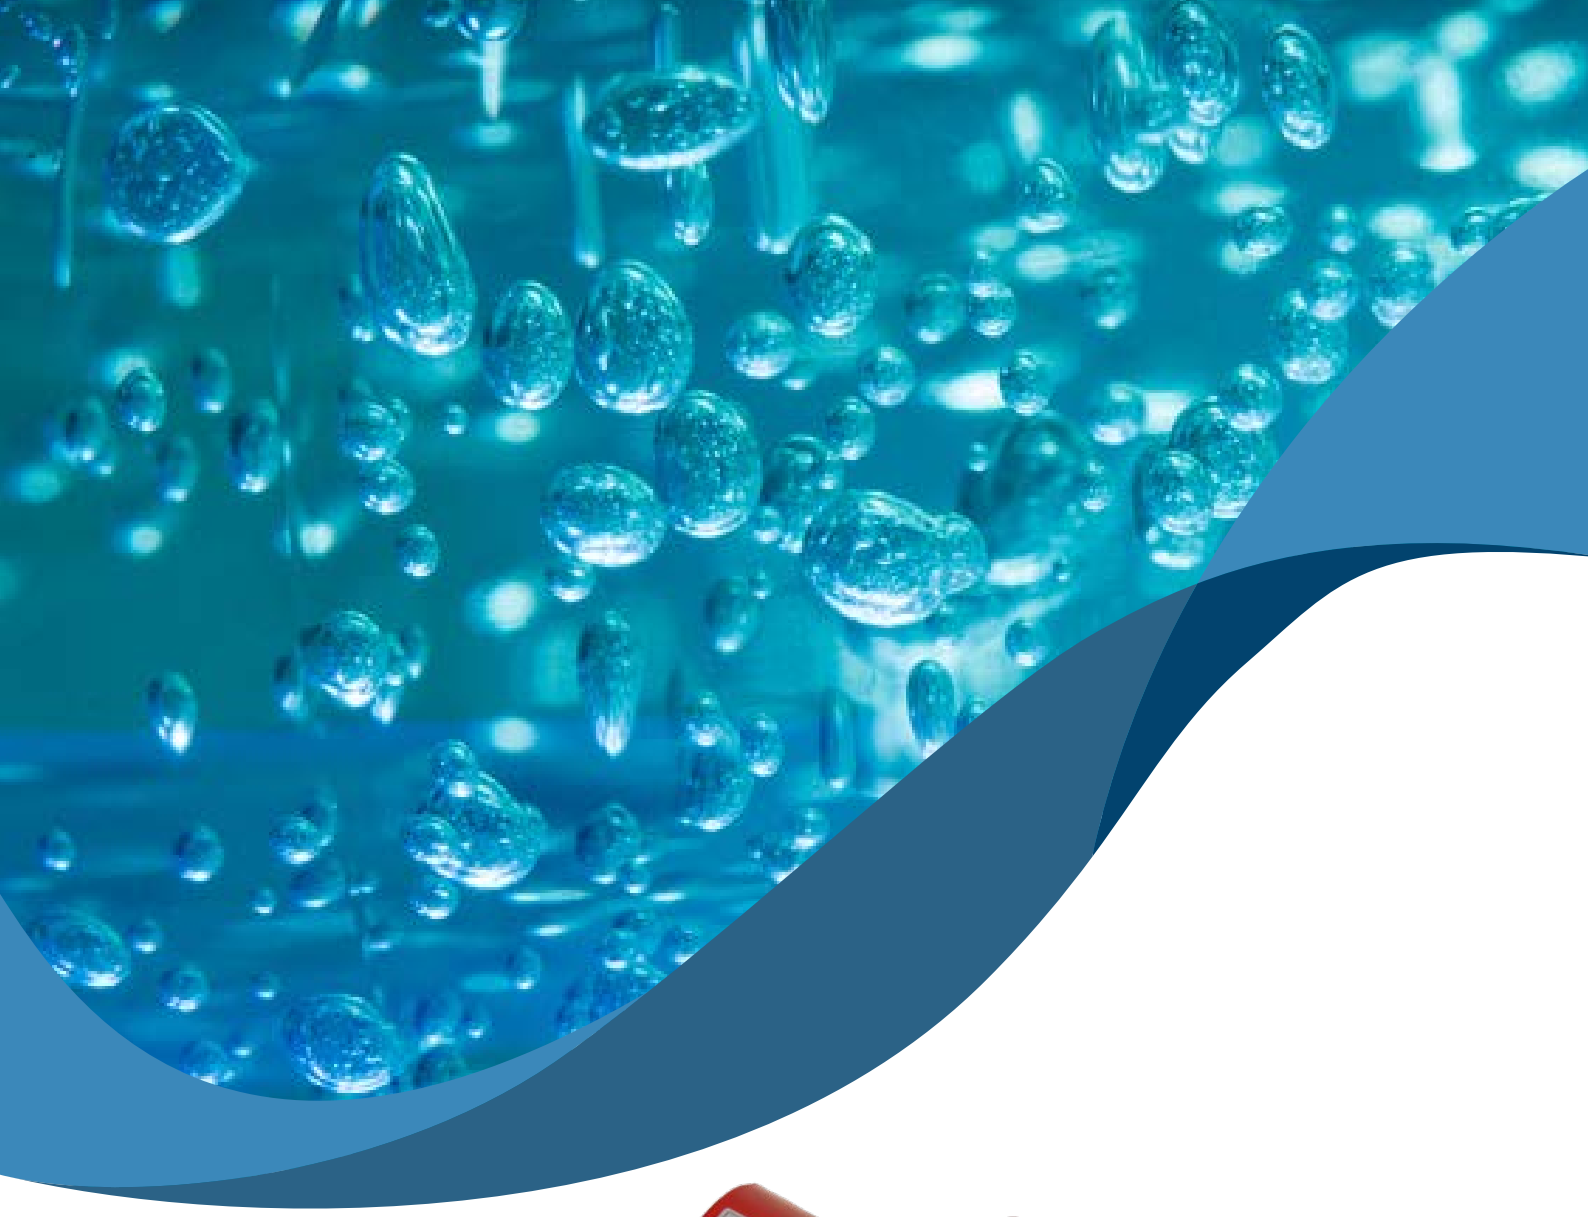

DROP - N. KIOSIDIS SA has been offering complete filtration solutions since 1971. At our privately owned premises of 6000 sq. m. located in the industrial area of Sindos Thessaloniki, we manufacture **water filtration systems** covering all needs, both before and after water pumping.

Our long experience and our personnel's expertise, enables us to manufacture specialized filtration systems and structures, according to your individual needs.

Our aim is to constantly educate and train our personnel, to improve our products and services as well as design and develop new innovative products.

Our Sales and Representatives' Network extends from the European Union, the Balkans, Eastern Europe to the Middle East, Africa, the Persian Gulf, South America and the Caribbean.

Our top quality certified products are used in:
- Agriculture (irrigation and fertigation)
- Industry and
- Water Supply

The use of DROP filters in your water supply systems:
- Increases the reliability of your installation
- Contributes to quicker amortization of its cost because it minimizes the need for repairs.
- Offers trouble-free continuous operation with minimum surveillance.

HORIZONTAL FILTERS

USAGE

O-series screen filters are used for filtration of water with low concentrations of inorganic suspended solids (eg sand). Also it can be used as a secondary filter after primary filtration systems (e.g. media filter, hydrocyclones etc.).

The installation of the filter is done by following the direction of the flow arrow in the filter body. Water enters the inlet, passes through the cartridge, filtered, and exits from the outlet. The filter is cleaned manually, disassembling the lid and removing the cartridge.


The cleaning of the cartridge should always be done when the difference of input-output pressure (DP) is 0,5bar greater than the pressure difference when the cartridge is clean.




MATERIALS

BODY:	Steel S235JR (also available in stainless steel AISI 304 & 316, on request)
CARTRIDGE:	u-PVC (DIN8061-8062) / stainless steel screen (AISI 304) / perforated stainless steel (for models 3/4", 1" & 1½", as well as models by 6" and above)
GASKETS:	EPDM
SURFACE TREATMENT:	Chemical cleaning (pickling, phosphate) and electrostatic painting with polyester powder (available epoxy coatings suitable for drinking water)


O SERIES

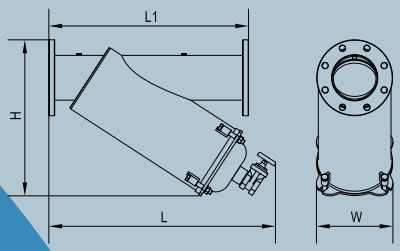

O5" to O8"

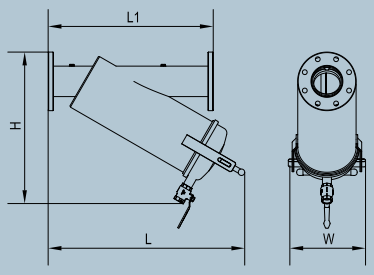

O2" to O4"



O1" to O1 ½ "

CODE	DESCRIPTION	CONNECTIONS	FILTRATION AREA cm^2	FLOW m^3/h	MAX PRESSURE bar	L1 mm	L mm	H mm	W mm	WEIGHT kg
05-00-102	Horizontal filter series O 1" long (0,25)	TM	705	2-5	8	350	347	365	200	8,8
05-00-151	Horizontal filter series O 1½" long (0,25)	TM	705	5-12	8	350	349	365	200	9,1
05-00-200	Horizontal filter series O 2" TF	TF, F, G	1115	15-30	8	470	504	402	240	17,5
05-00-250	Horizontal filter series O 2½" TF	TF, F, G	1390	20-35	8	500	580	454	240	20,5
05-00-300	Horizontal filter series O 3" TF	TF, F, G	1700	25-40	8	500	660	525	240	23,1
05-00-400	Horizontal filter series O 4" TF	TF, F, G	1700	40-80	8	620	738	570	290	33,0
05-00-500	Horizontal filter series O 5" F	F, G	3220	80-120	8	750	852	568	290	50,0
05-00-600	Horizontal filter series O 6" F	F, G	3220	80-120	8	750	852	586	287	54.5
05-00-601	Horizontal filter series O 6" Super (750) F	F, G	4554	80-150	8	930	1004	684	287	64,2
05-00-602	Horizontal filter series O 6" (990) F	F, G	5730	80-180	8	930	1205	815	287	73,4
05-00-802	Horizontal filter series O 8" F	F, G	5730	80-220	8	930	1242	771	287	79,7

TM: Threaded male BSP, TF: Threaded Female BSP, F: Flanged, DIN 2576 PN 10, G: Grooved upon request
Also available with automatic cleaning system (Autoflush) upon request

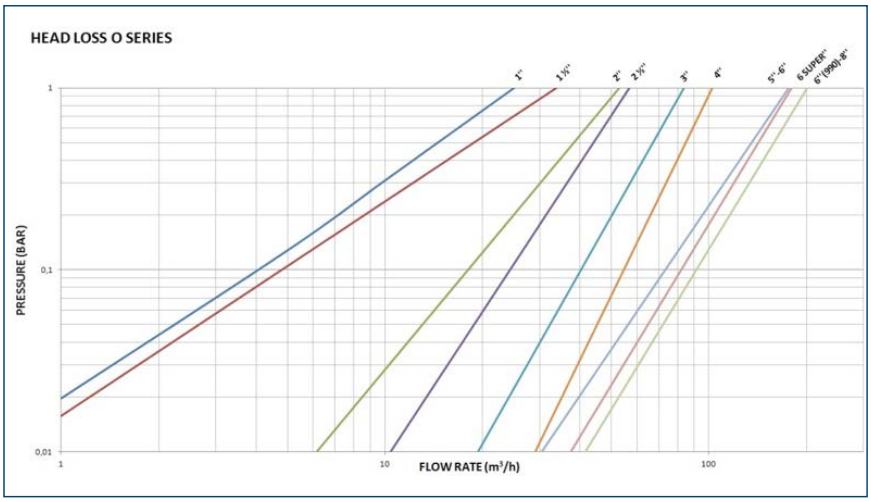


*Chart based on 120mesh screen

SINDOS INDUSTRIAL AREA | T.G. 157 | 57022 | THESSALONIKI | GREECE | TEL +30 2310-798487, 796066

DROP KIOSIDIS S.A.

www.drop.gr | E-MAIL intsales@drop.gr