The information contained in this proposal is confidential and must not be passed to any other party


Company:	AKRO (SPECTRA Professional UV Solutions)	***Contact:***	Dan TEODORESCU, Sales Engineer
From:	Enes Geylani	***Date:***	22 September 2026
Pages:	5	***Nuvonic ref:***	Q02698
Application:	Disinfection	***Project ref:***	Brasov Hospital
Tel:	+40 771 428 410	***Email:***	**dan.teodorescu@akro.ro**

Dear Dan,

Further to your request, please find below our proposal covering both the main manifold configuration and the alternative buffer-tank discharge configuration you asked us to evaluate for the Brasov hospital project. Please refer to the attached technical data sheet for additional data.

Please don't hesitate to contact me if you have any technical queries.

POTENTIAL LOCATIONS OF THE PHARMALINE ECO

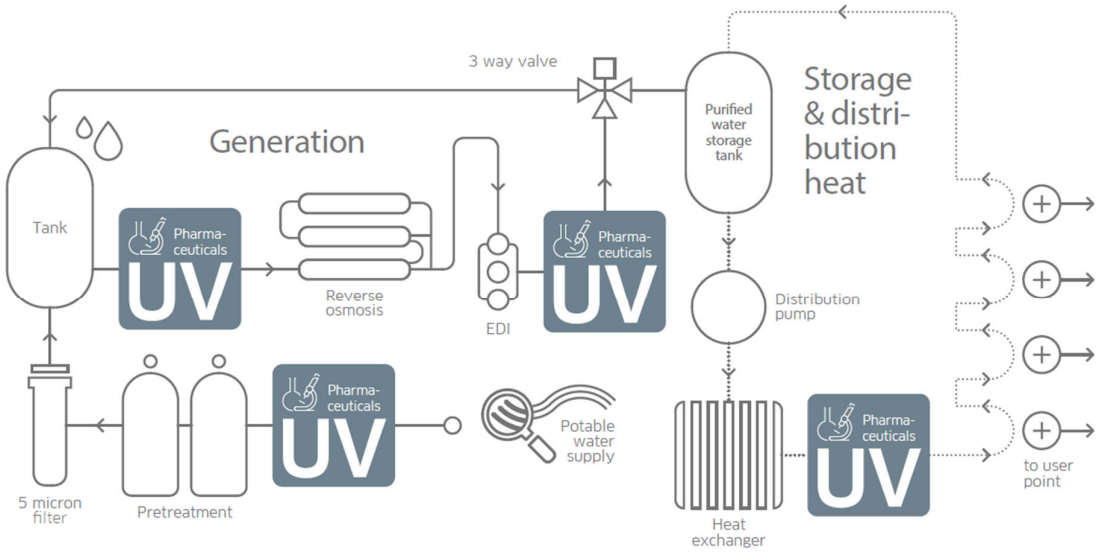

formerly Aquionics, Berson, Hanovia and Orca GmbH

Americas
4215-E Stuart Andrew Blvd
Charlotte, NC 28217
Tel: +1 (908) 256 5700
Email: americas@nuvonicuv.com

EMEA
780 Buckingham Avenue
Slough, Berkshire, SL1 4LA
Tel: +44 (0) 1753 515300
Email: emea@nuvonicuv.com

formerly Aquionics, Berson, Hanovia and Orca GmbH

PURITY WITH SCIENCE

NUVONIC ECO

Why ECO?

Efficient



- Low energy consumption, reducing operational costs
- Complies with sustainability objectives by minimizing carbon footprint
- Promotes eco-friendly water treatment practices
- Suitable for LEED and other green building certifications
- Integrated monitoring for real time performance tracking

Compact






- Maximized disinfection in a small footprint
- Fits seamlessly into small utility spaces or existing infrastructure
- Wide range of models, reducing construction and installation costs
- Achieve sustainability goals without compromising performance
- Enables proactive maintenance in tight quarters

Optimized

- Optimized for a wide range of applications using Computation Fluid Dynamics
- Matched ballast and lamp ensures optimal performance
- Scales to accommodate varying flow rates and treatment demands
- Integrated remote monitoring ensures efficient power usage

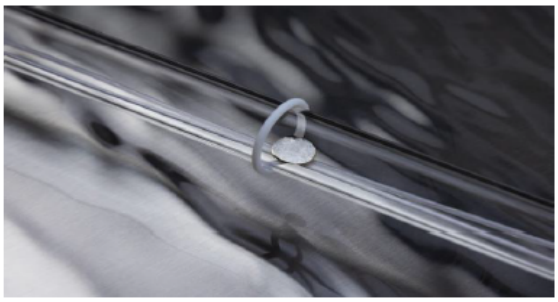

formerly Aquionics, Berson, Hanovia and Orca GmbH

Americas
4215-E Stuart Andrew Blvd
Charlotte, NC 28217
Tel: +1 (908) 256 5700
Email: americas@nuvonicuv.com

EMEA
780 Buckingham Avenue
Slough, Berkshire, SL1 4LA
Tel: +44 (0) 1753 515300
Email: emea@nuvonicuv.com

Quotation

Option 1 – Main Manifold Configuration (2 × DN100 branches + 1 × DN150 branch)

	Product Description	Net Price	Qty	Total
1	PharmaLine ECO 40 (304 Stainless Steel IP 54 NEMA 12 cabinet, 220V 50 Hz Single Phase Input Power (4-380)) Document Support Pack is included Application: Potable Water Disinfection Design Flow Rate: 50 m³/h per unit (max.) UVT: 98% (client-advised) UV Dose: 30 mJ/cm2 avg. at the end of lamp life	£ 5,328.60	2	£ 10,657.20
2	PharmaLine ECO 85 (304 Stainless Steel IP 54 NEMA 12 cabinet, 220V 50 Hz Single Phase Input Power (4-380)) Document Support Pack is included Application: Potable Water Disinfection Design Flow Rate: 80 m³/h (max.) UVT: 98% (client-advised) UV Dose: 30 mJ/cm2 avg. at the end of lamp life	£ 7,002.00	1	£ 7,002.0
			Total Net Price	**£ 17,659.20**

Option 2 – Alternative Configuration (UV on buffer tank pump discharge only)

	Product Description	Net Price	Qty	Total
1	PharmaLine ECO 40 (304 Stainless Steel IP 54 NEMA 12 cabinet, 220V 50 Hz Single Phase Input Power (4-380)) Document Support Pack is included Application: Potable Water Disinfection (alternative) Design Flow Rate: 54 m³/h (max.) UVT: 98% (client-advised) UV Dose: 30 mJ/cm2 avg. at the end of lamp life	£ 5,328.60	1	£ 5,328.60
			Total Net Price	**£ 5,328.60**

Americas
4215-E Stuart Andrew Blvd
Charlotte, NC 28217
Tel: +1 (908) 256 5700
Email: americas@nuvonicuv.com

EMEA
780 Buckingham Avenue
Slough, Berkshire, SL1 4LA
Tel: +44 (0) 1753 515300
Email: emea@nuvonicuv.com

Technical Data

	PharmaLine ECO
UV Lamp Type	Nuvonic low-pressure amalgam lamp
Number of Lamps	3 (ECO 40) / 1 (ECO 85)
Expected Lamp Life	9,000 h up to 12,000 hours
Chamber Material	Stainless Steel 316L / 1.4404
Pressure Rating	10 bar
Cabinet Material	Stainless Steel 304
Supply Voltage	230 V ±10% - 50/60 Hz
Standard Cable Length	5 m
Approvals	CE marked, UL, FDA-approved materials used for all wetted parts

Commercial Notes

i) All prices are quoted net in GBP, ex works Slough, UK
ii) One electronic manual in English language is included in the price of each UV system
iii) Subject to our Standard Terms & Conditions (available on request)
iv) Availability ex works 12-14 working weeks after receipt of order.
v) Packing – included
vi) Carriage – to be confirmed
vii) Payment terms – 100% in advance
viii) Quotation valid for 60 days
ix) PharmaLine ECO 40 (3″ connection) and ECO 85 (4″ connection) .
x) Sizing basis: 30 mJ/cm² average dose (end-of-lamp-life, fouled sleeve) and 98% UVT, as advised — no specific regulatory disinfection standard has yet been confirmed for this project.
xi) Option 2 treats only the buffer-tank-sourced flow (54 m³/h); water drawn directly from the public supply into the manifold does not pass through the UV system. Please confirm this matches your intended treatment objective before we finalize.

FOR AND ON BEHALF OF NUVONIC

Enes Geylani
Regional Sales Manager EEUMEA

Enes.geylani@nuvonic.com
Mob: +44 (0)7353 111 450