UV AM 96 ECO

GENERAL INFORMATION	
Max flow rate	55 m3/h
UVC transmittance	90%- 1 cm
UVC dose	400 J/m2
Water Temperature range	5-50° C
Total consumption	666 W
Mounting	Horizontal or vertical

UV REACTOR	
Material	Stainless Steel 316L
Connections	Flange DN 100 PN 10/16
Drain/Air Valve	1/8" / ½" M thread
Total Volume	50 l
Total weight	31 kg
Max working pressure	10 bars g
Protection class	IP 65
Shape	L
Flow direction	See drawing
Cleaning system	Optional
Quartz sleeve cleaning system Manual Automatic	 NO Available (RA version - U shape – Horizontal configuration)

UV LAMP	
Number	3
Lifespan	14000 hr
Lamp power	200 W
Type	LO amalgam lamp type 028119

UV SENSOR (ONLY on PLUS MODELS)	
Type	UVC selective sensor type UV737S/TF
Sensor Cable	Shielded cable 4 meters
Sensor holder material	Teflon

CONTROL PANEL	
Material and colour	Painted Steel – RAL 7035
Protection class	IP 54
Ambient temperature range	5 – 45 °C
Rel. humidity	20-95% non-condensing (condensing on request)
Power supply	230 V - 50/60 Hz (115V – 50/60 Hz on request)
Lamp cable	2,5 m
Monitor display	LCD SITA
Hour meter	Yes for total system life
Resettable hour meter	Yes for lamp life control
Lamp function control	Yes
Alarm led	Yes
Free contact (NO - NC)	Yes – general alarm (max 2 A)
230 V output (NO - NC)	Yes – general alarm (max 2 A)
Remote ON/OFF contact	Yes (settable)
ON/OFF Timer	Yes (settable)
Reactor temperature measurement and alarm	Yes (°C) – settable value (shut off for high temperature) on PLUS MODELS
UV Irradiance measurement and alarm	Yes (% or W/m^2 optional) – settable value on PLUS MODELS
4/20 mA output	Optional – for Irradiance and water temperature on PLUS MODELS
Audio alarm	Optional


Edition 02/21

S.I.T.A. srl – Via Rivarolo 61 – 16161 Genova Italy
tel 0039-10-7406848 – fax 0039-10-7406851 – e-mail info@sitauv.com – www.sitauv.com

NOTE:


- THESE OVERALL DIMENSIONS CAN CHANGE A LITTLE BECAUSE OF THE CONSTRUCTIVE TOLERANCES AND THE ASSEMBLING OF MECHANICAL COMPONENTS YOU USED.


NOTE (1)
Irradiation sensor coupling.
Only for plus version



A-A SECT.

* LEGS ARE OPTIONAL
(ONLY FOR HORIZONTAL INSTALLATION)

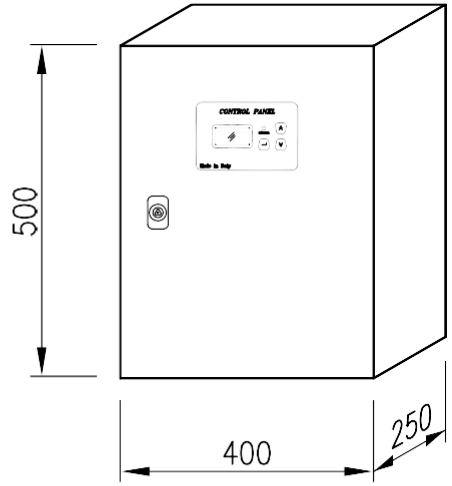

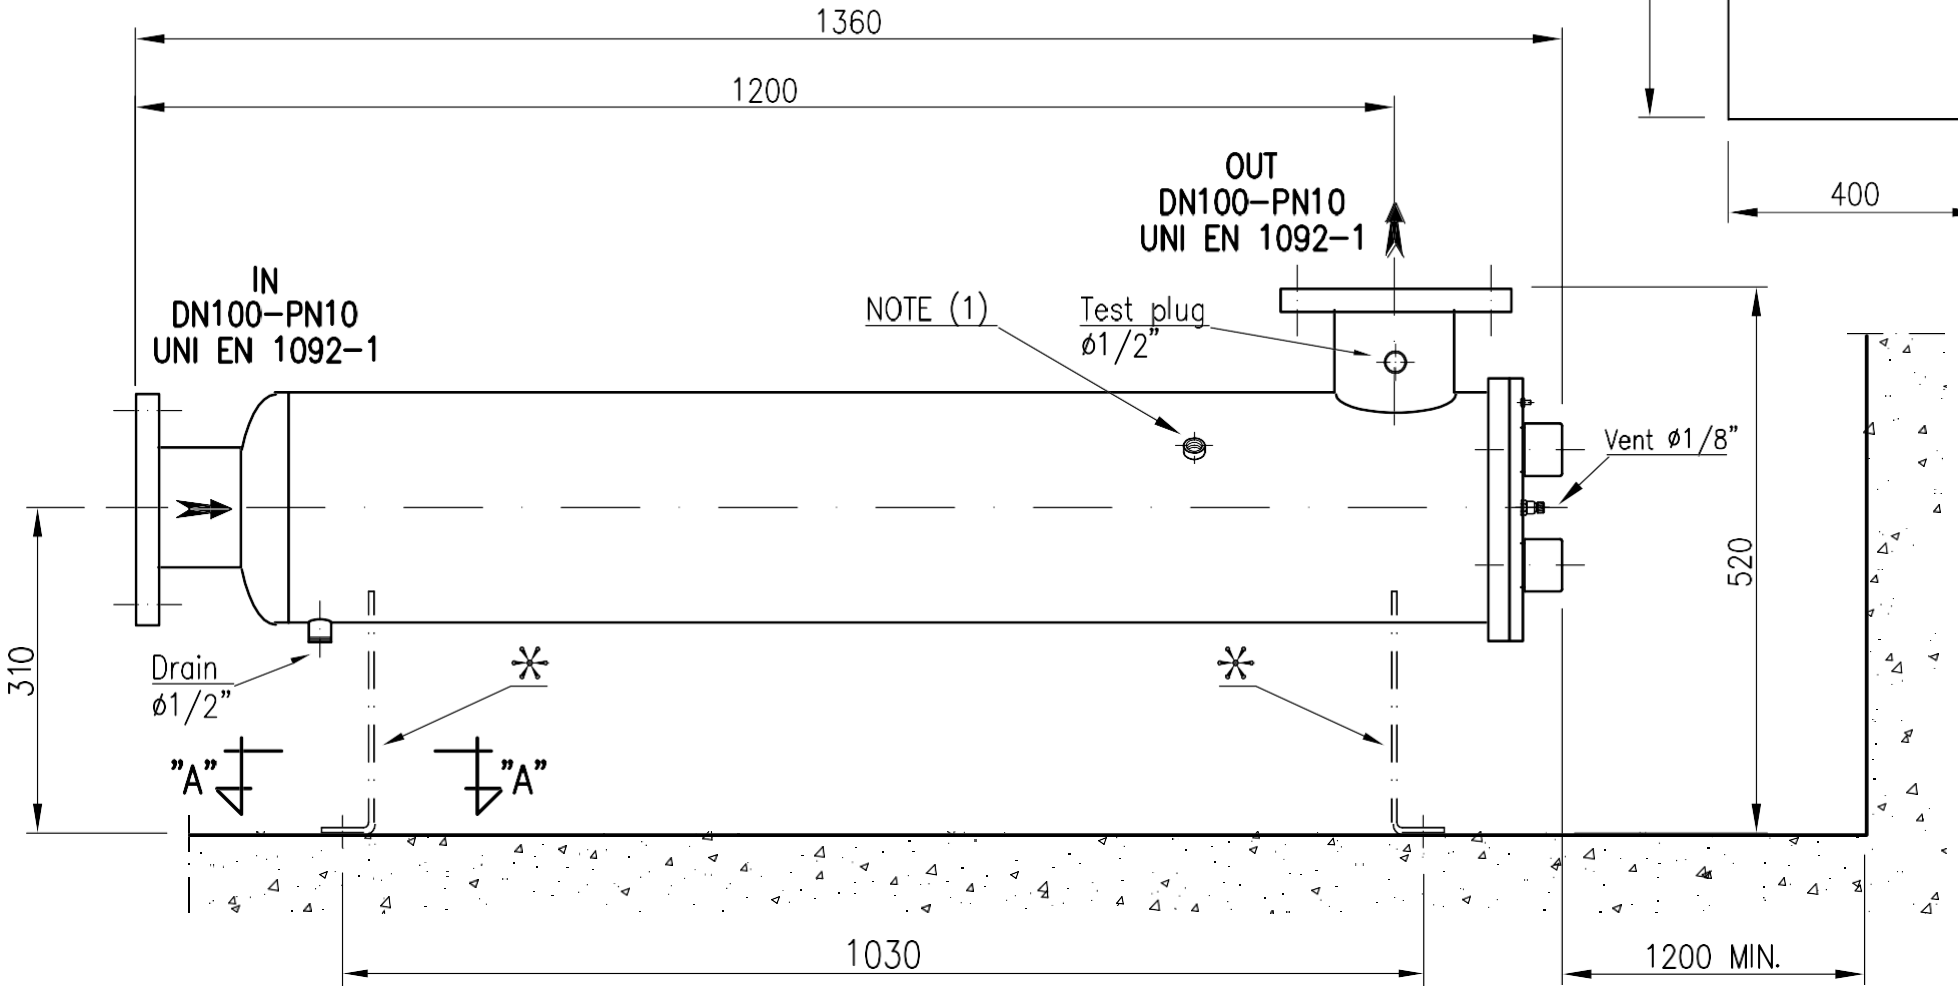

REV.	DESCRIZIONE	DATA	DISEGNATO	APPROVATO
A	FIRST ISSUE	14/12/20	SCHENONE	MAZZONE

NOME FILE: .DWG

S.r.l. Societa' Italiana Trattamento Acque
Via Rivarolo, 61 - 16161 Genova Italy - Tel. 0039-10-7406848 / Fax 0039-10-7406851 email info@sitauv.com

LA SITA s.r.l. SI RISERVA A TERMINI DI LEGGE LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO COMUNQUE NOTO A TERZI O A DITTE CONCORRENTI SENZA LA SUA AUTORIZZAZIONE SCRITTA

TITOLO
UV-C DISINFECTION
UV AM96 ECO MODEL
LAY-OUT

CLIENTE /

CODICE /

F.to A4 | Scala /

Foglio 01 di 01