UV AM 96 ST

GENERAL INFORMATION	
Max flow rate	55 m3/h
UVC transmittance	90%- 1 cm
UVC dose	400 J/m2
Water Temperature range	5-50° C
Total consumption	666 W
Mounting	Horizontal or vertical
UV REACTOR	
Material	Stainless Steel 316L
Connections	Flange DN 100 PN 10/16
Drain/Air Valve	1/8" / ½" M thread
Total Volume	50 l
Total weight	31 kg
Max working pressure	10 bars g
Protection class	IP 65
Shape	L
Flow direction	See drawing
Cleaning system	Optional
Quartz sleeve cleaning system Manual Automatic	 NO Available (RA version - U shape – Horizontal configuration)
UV LAMP	
Number	3
Lifespan	14000 hr
Lamp power	200 W
Type	LO amalgam lamp type 028119
UV SENSOR (ONLY on PLUS MODELS)	
Type	UVC selective sensor type UV737S/TF
Sensor Cable	Shielded cable 4 meters
Sensor holder material	Teflon

CONTROL PANEL		ST
Material and colour		Painted Steel – RAL 7035 (reinforced polyester or SS on request)
Protection class		IP 54
Rel. humidity		20-95% non-condensing (condensing on request)
Ambient temperature range		5 – 45 °C
Power supply		230 V - 50/60 Hz (other on request)
Lamp cable length		2,5 m
Monitor display		SITA Touch-Screen 7"
Multi language display		Yes
Chamber temperature measurement		Yes (°C) (°F settable)
Panel temperature measurement		Yes (°C) (°F settable)
UV irradiance measurement		Yes (% or W/m^2)
UV dose calculation		Optional
Hour meters		For total system life – Resettable for lamp life control
Free contact alarms (N/O N/C, max 5A)		
	General alarm	Yes
	System working signal	Yes
	High temperature alarm	Yes, for panel e reactor
	Low irradiance alarm	Yes
	Electric Valve Control	Yes
	Lamps control on/off	Yes
4/20 mA output		Yes for irradiance and temperature
4/20 mA input		Yes for Flow and UVT (UV Transmittance)
Remote ON/OFF		Yes (settable contact working)
ON/OFF timer		Yes
Datalog – Events		Yes
Lamp power regulation		Manual or Automatic (dose or flow pacing)
Comunication ports (protocols)		CAN, Ethernet, USB, Serial (Modbus, RTU/TCP/IP)
Remote access		with specific App or Web Server


Edition 09/24

S.I.T.A. srl – Via Rivarolo 61 – 16161 Genova Italy
tel 0039-10-7406848 – fax 0039-10-7406851 – e-mail info@sitauv.com – www.sitauv.com

NOTE:


- THESE OVERALL DIMENSIONS CAN CHANGE A LITTLE BECAUSE OF THE CONSTRUCTIVE TOLERANCES AND THE ASSEMBLING OF MECHANICAL COMPONENTS YOU USED.


NOTE (1)
Irradiation sensor coupling.
Only for plus version



A-A SECT.

* LEGS ARE OPTIONAL
(ONLY FOR HORIZONTAL INSTALLATION)

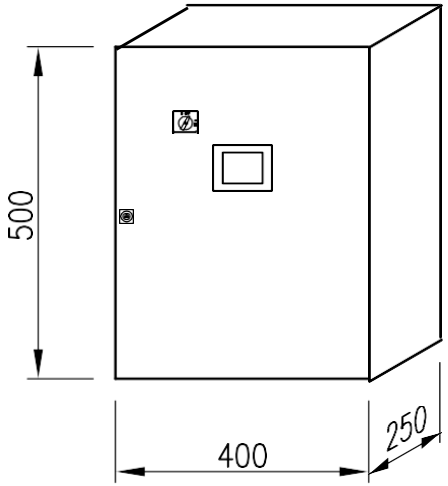

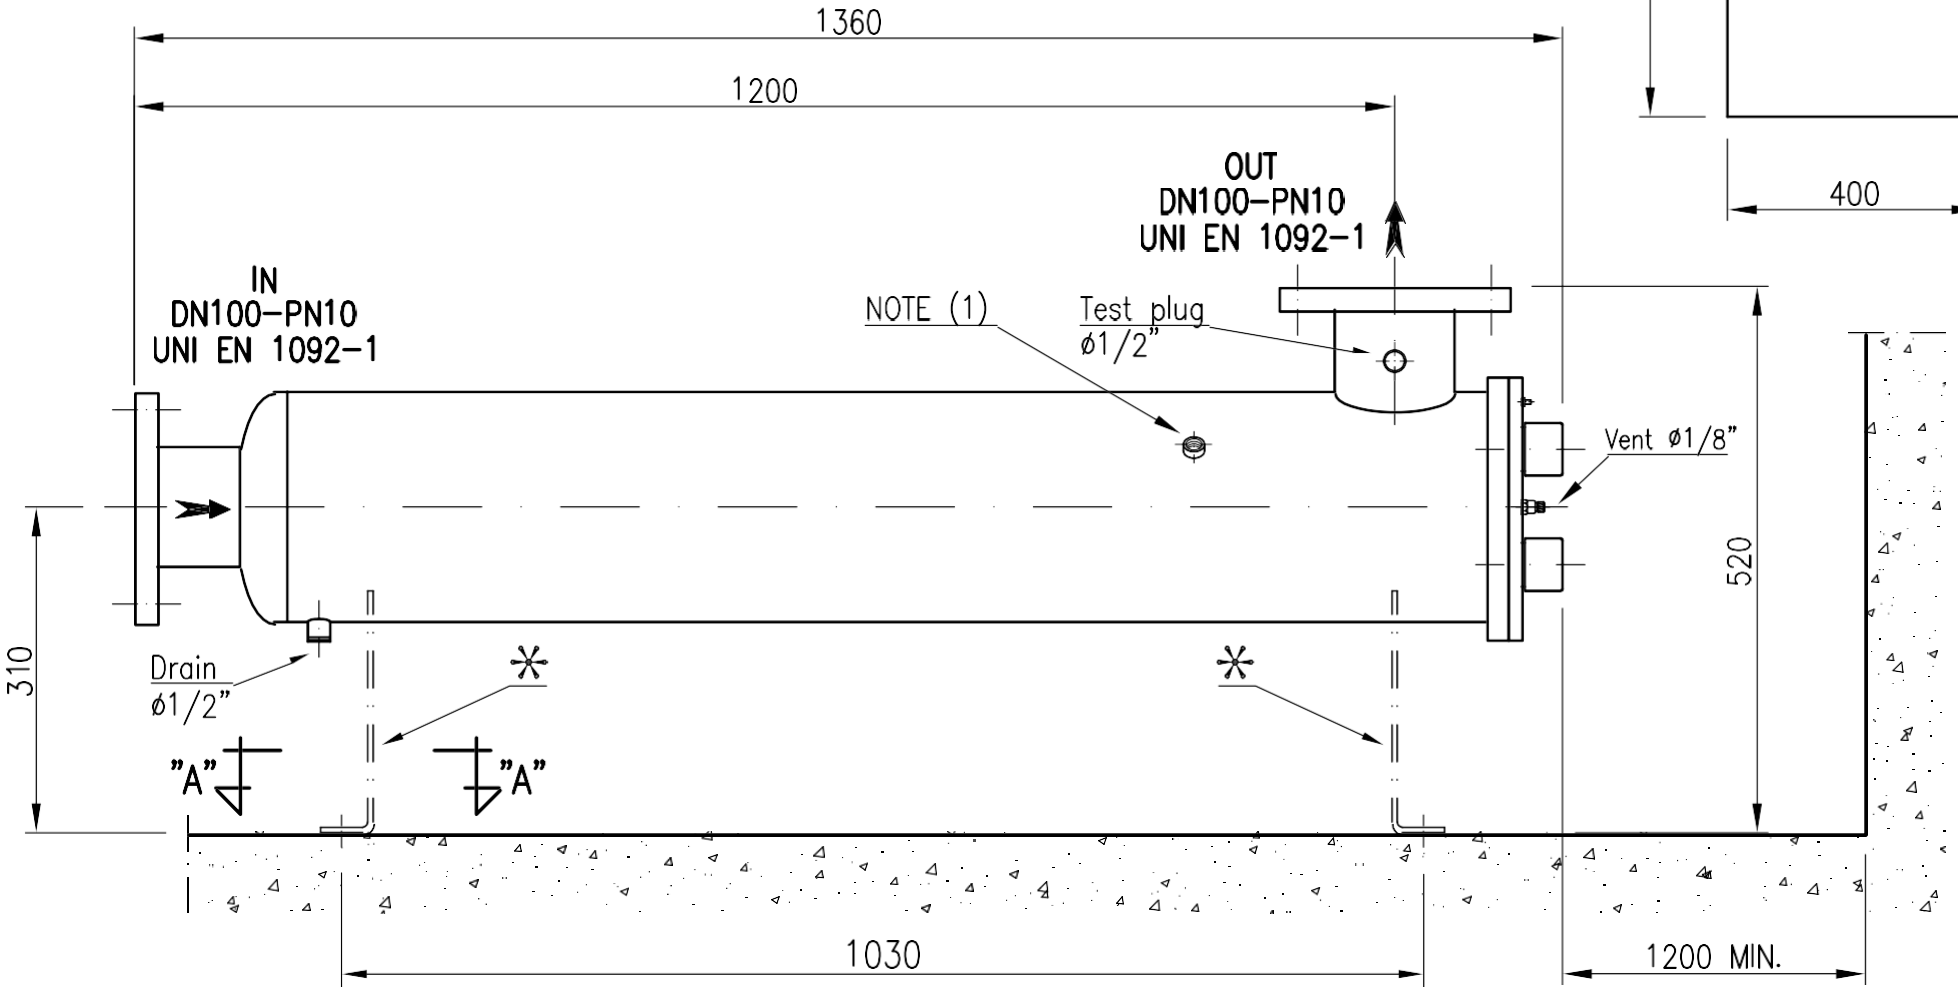

REV.	DESCRIZIONE	DATA	DISEGNATO	APPROVATO
A	FIRST ISSUE	03/07/19	SCHENONE	MAZZONE

Societa' Italiana Trattamento Acque
+39 0107406848
info@sitauv.com
www.sitauv.com

LA SITA S.r.l. SI RISERVA A TERMINI DI LEGGE LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO COMUNQUE NOTO A TERZI O A DITTE CONCORRENTI SENZA LA SUA AUTORIZZAZIONE SCRITTA

TITOLO
UV-C DISINFECTION
UV AM96 MODEL
LAY-OUT

CLIENTE /

CODICE /

F.to A4 | Scala /

Foglio 01 di 01

NOME FILE: .DWG