# Standard Filter Bags



## Our range

- Polypropylene & Polyester "Melt-Blown" depth filter bags with sintered fibres and measurable efficiency
- Extended life Polypropylene & Polyester filter bags made from a special felt to guarantee a long life
- Conventional felt filter bags available in many different polymers for the widest chemical compatibility
- Nylon, Polypropylene, Polyester monofilament filter bags with absolute retention from 1 to 1200 micron
- Polyester multifilament filter bags
- Nomex and PTFE filter bag suitable for critical process conditions
- Multi-layer filter bags manufactured according to customer specifications

## Some applications

- Paint & varnish
- Solvents
- Adhesives
- Ink
- Industrial lining and coatings in general
- Emails
- Resins
- Intermediate chemicals
- Oil removal from cathaphoresis treatments
- Colloids removal in all applications
- Water pre and final filtration in all applications
- A variety of applications in food & beverage
- Wine filtration in many phases of the production

## Standard versions:

- Integrally thermo-welded provided with moulded polypropylene sealing ring
- Sewn with metal or polypropylene sealing ring
- Four standard sizes to match the most popular dimensions, special sizes available on application

All bag components are silicon free, filter bags manufacturing is in a restricted environmental area according to ISO 9002 regulations

## FILTER BAG CODE SELECTION


| Filter Bag version | Micron rating | Filter media | Filter bag size | Sealing ring material | Handle |
|---|---|---|---|---|---|
| - - sewn<br>WE - thermowelded | From 1 to 1000 micron<br>(see table 3) | P - Polypropylene felt<br>PE - Polyester felt<br>N - Nylon felt<br>V - Viscose felt<br>PTFE - PTFE felt<br>NX - Nomex felt<br>NMO - Nylon monofilament<br>PEMO - Polyester monofilament<br>PEMU - Polyester multifilament<br>PPM - Polypropylene monofilament<br>PX - Polypropylene "Extended Life"<br>PEX - Polyester "Extended Life"<br>MBP - Polypropylene "melt-blown" | 1M – size 3<br>2M – size 4<br>1 – size 1<br>2 – size 2<br>(see table 1) | SR - Carbon steel<br>SSR - Stainless steel<br>SB - SS band<br>PPR - Polypropylene ring<br>WR - Polypropylene Welseal<br>H - Poliestere "Welseal"<br>PR - Santoprene<br>TC - Latch<br>NR - No ring | - - None<br>WH - Single<br>WHS - Double<br>WLS - Reinforced |
| WE | 50 | P | 2 | WR | - |

Via Copernico, 2/4
20082 Binasco MI - Italy
Ph +39 02 90091439 - Fax +39 02 90096393
web: www.filterflo.net e-mail: export@filterflo.net

# Filter bag technical specifications

**Flow-rate of a filter bag in function of the fluid viscosity**

- Filter media: Polypropylene felt
- Initial pressure loss 0.07 bar
- Filter bag size: 1

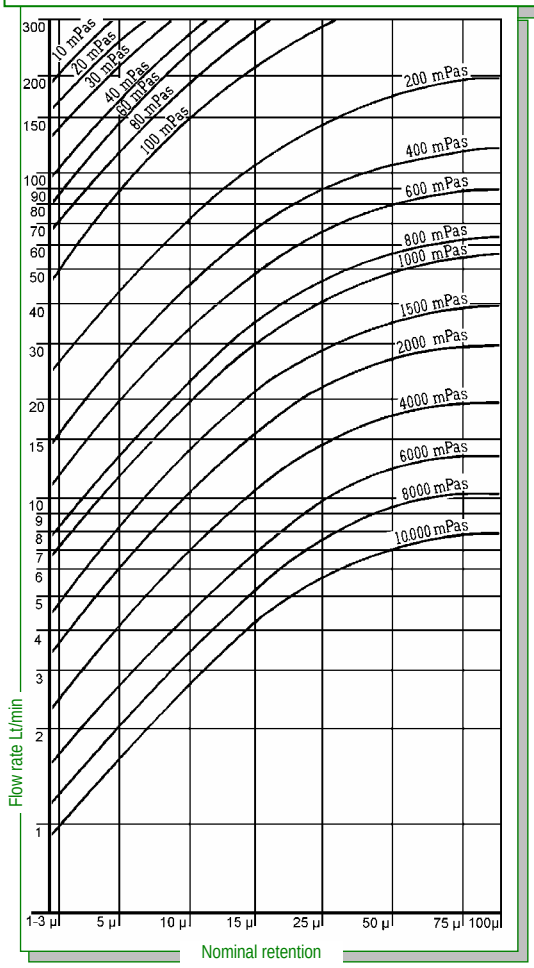


| Micron | Mesh |
|---|---|
| 1.000 | 18 |
| 840 | 20 |
| 710 | 25 |
| 590 | 30 |
| 500 | 35 |
| 420 | 40 |
| 350 | 45 |
| 297 | 50 |
| 250 | 60 |
| 210 | 70 |
| 177 | 80 |
| 149 | 100 |
| 125 | 120 |
| 105 | 140 |
| 88 | 170 |
| 74 | 200 |
| 62 | 230 |
| 53 | 270 |
| 44 | 325 |
| 37 | 400 |
| 30 | 500 |
| 20 | 625 |
| 15 | 1.000 |
| 10 | 1.250 |
| 5 | 2.500 |

Micron / Mesh conversion table (for monofilament filter bags)

Table 1

| | Filter bag size | | | |
|---|---|---|---|---|
| | 1M | 2M | 1 | 2 |
| Filter area | 0.05 m² | 0.09 m² | 0.19 m² | 0.41 m² |
| Internal volume | 1.4 lt | 2.5 lt | 7.9 lt | 17.3 lt |
| Ring diameter | 102 mm | 102 mm | 178 mm | 178 mm |
| Length | 229 mm | 381 mm | 419 mm | 813 mm |

Table 2

| Filter media Material | Chemical compatibility & max working temperature | | | | |
|---|---|---|---|---|---|
| | acids | bases | solvents | oxidizing agents | °C |
| Polyestere | good | good | excellent | limited | 110 |
| Polypropylene | excellent | excellent | good | excellent | 90 |
| Nylon | fair | good | excellent | fair | 100 |
| Viscose | limited | limited | excellent | limited | 100 |
| Nomex | good | good | excellent | excellent | 200 |
| PTFE | excellent | excellent | excellent | excellent | 250 |

(¹) - Filter bags provided with "Welseal" ring - max temperature 90°C

FILTER MEDIA & MICRON RATINGS AVAILABLE

Table 3

| | nominal micron rating | 1 | 3 | 5 | 10 | 15 | 25 | 35 | 40 | 50 | 60 | 75 | 100 | 125 | 150 | 175 | 200 | 250 | 300 | 400 | 600 | 800 | 900 | 1000 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | **Felt filter media - efficiency 65÷75%** | | | | | | | | | | | | | | | | | | | | | | | |
| P | Polypropylene felt | ■ | ■ | ■ | ■ | | ■ | | | ■ | | ■ | ■ | | | | | | | | | | | |
| PE | Polyester felt | ■ | ■ | ■ | ■ | ■ | ■ | | | ■ | | ■ | ■ | | ■ | | ■ | | | | | | | |
| PX | "Extended life" - polypropylene felt | ■ | | ■ | ■ | | ■ | | | ■ | | | | | | | | | | | | | | |
| PEX | "Extended life" - polyester felt | ■ | | ■ | ■ | | ■ | | | ■ | | | | | | | | | | | | | | |
| V | Viscose felt | | | ■ | ■ | ■ | ■ | | | ■ | | ■ | ■ | | | | | | | | | | | |
| N | Nylon felt | | | ■ | ■ | | ■ | | | ■ | | | ■ | | | | | | | | | | | |
| NX | Nomex felt | | | ■ | | | ■ | | | ■ | | | ■ | | ■ | | ■ | | | | | | | |
| PTFE | PTFE felt | | | ■ | | | ■ | | | ■ | | | ■ | | ■ | | | | | | | | | |
| | **Monofilament & multifilament filter bags - efficiency 99,9%** | | | | | | | | | | | | | | | | | | | | | | | |
| MNO | Nylon mesh (monofilament) | ■ | | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| MNU | Nylon mesh (multifilament) | | | | | | | | | ■ | | ■ | ■ | ■ | | ■ | ■ | | ■ | ■ | ■ | | | |
| PPM | Polypropylene mesh (monofilament) | | | | | | | | | | | | | | | | ■ | ■ | | ■ | | | | |
| PEMO | Polyester mesh (monofilament) | ■ | | ■ | ■ | | | ■ | | ■ | | ■ | | ■ | | ■ | ■ | | ■ | ■ | ■ | | | |
| PEMU | Polyester mesh (multifilament) | | | | | | | | | ■ | | ■ | ■ | ■ | | ■ | ■ | | ■ | ■ | ■ | | | |
| | **Melt-blown filter bags - efficiency 99,5%** | | | | | | | | | | | | | | | | | | | | | | | |
| MBP | Polypropylene "Melt-blown" | ■ | | ■ | ■ | | ■ | | | | | | | | | | | | | | | | | |


filterflo

Via Copernico, 2/4
20082 Binasco MI - Italy
Ph +39 02 90091439 - Fax +39 02 90096393

web: www.filterflo.net
e-mail: export@filterflo.net