
ELECTRICAL POWER SUPPLY:
220 V~ ± 10%, 50 Hz

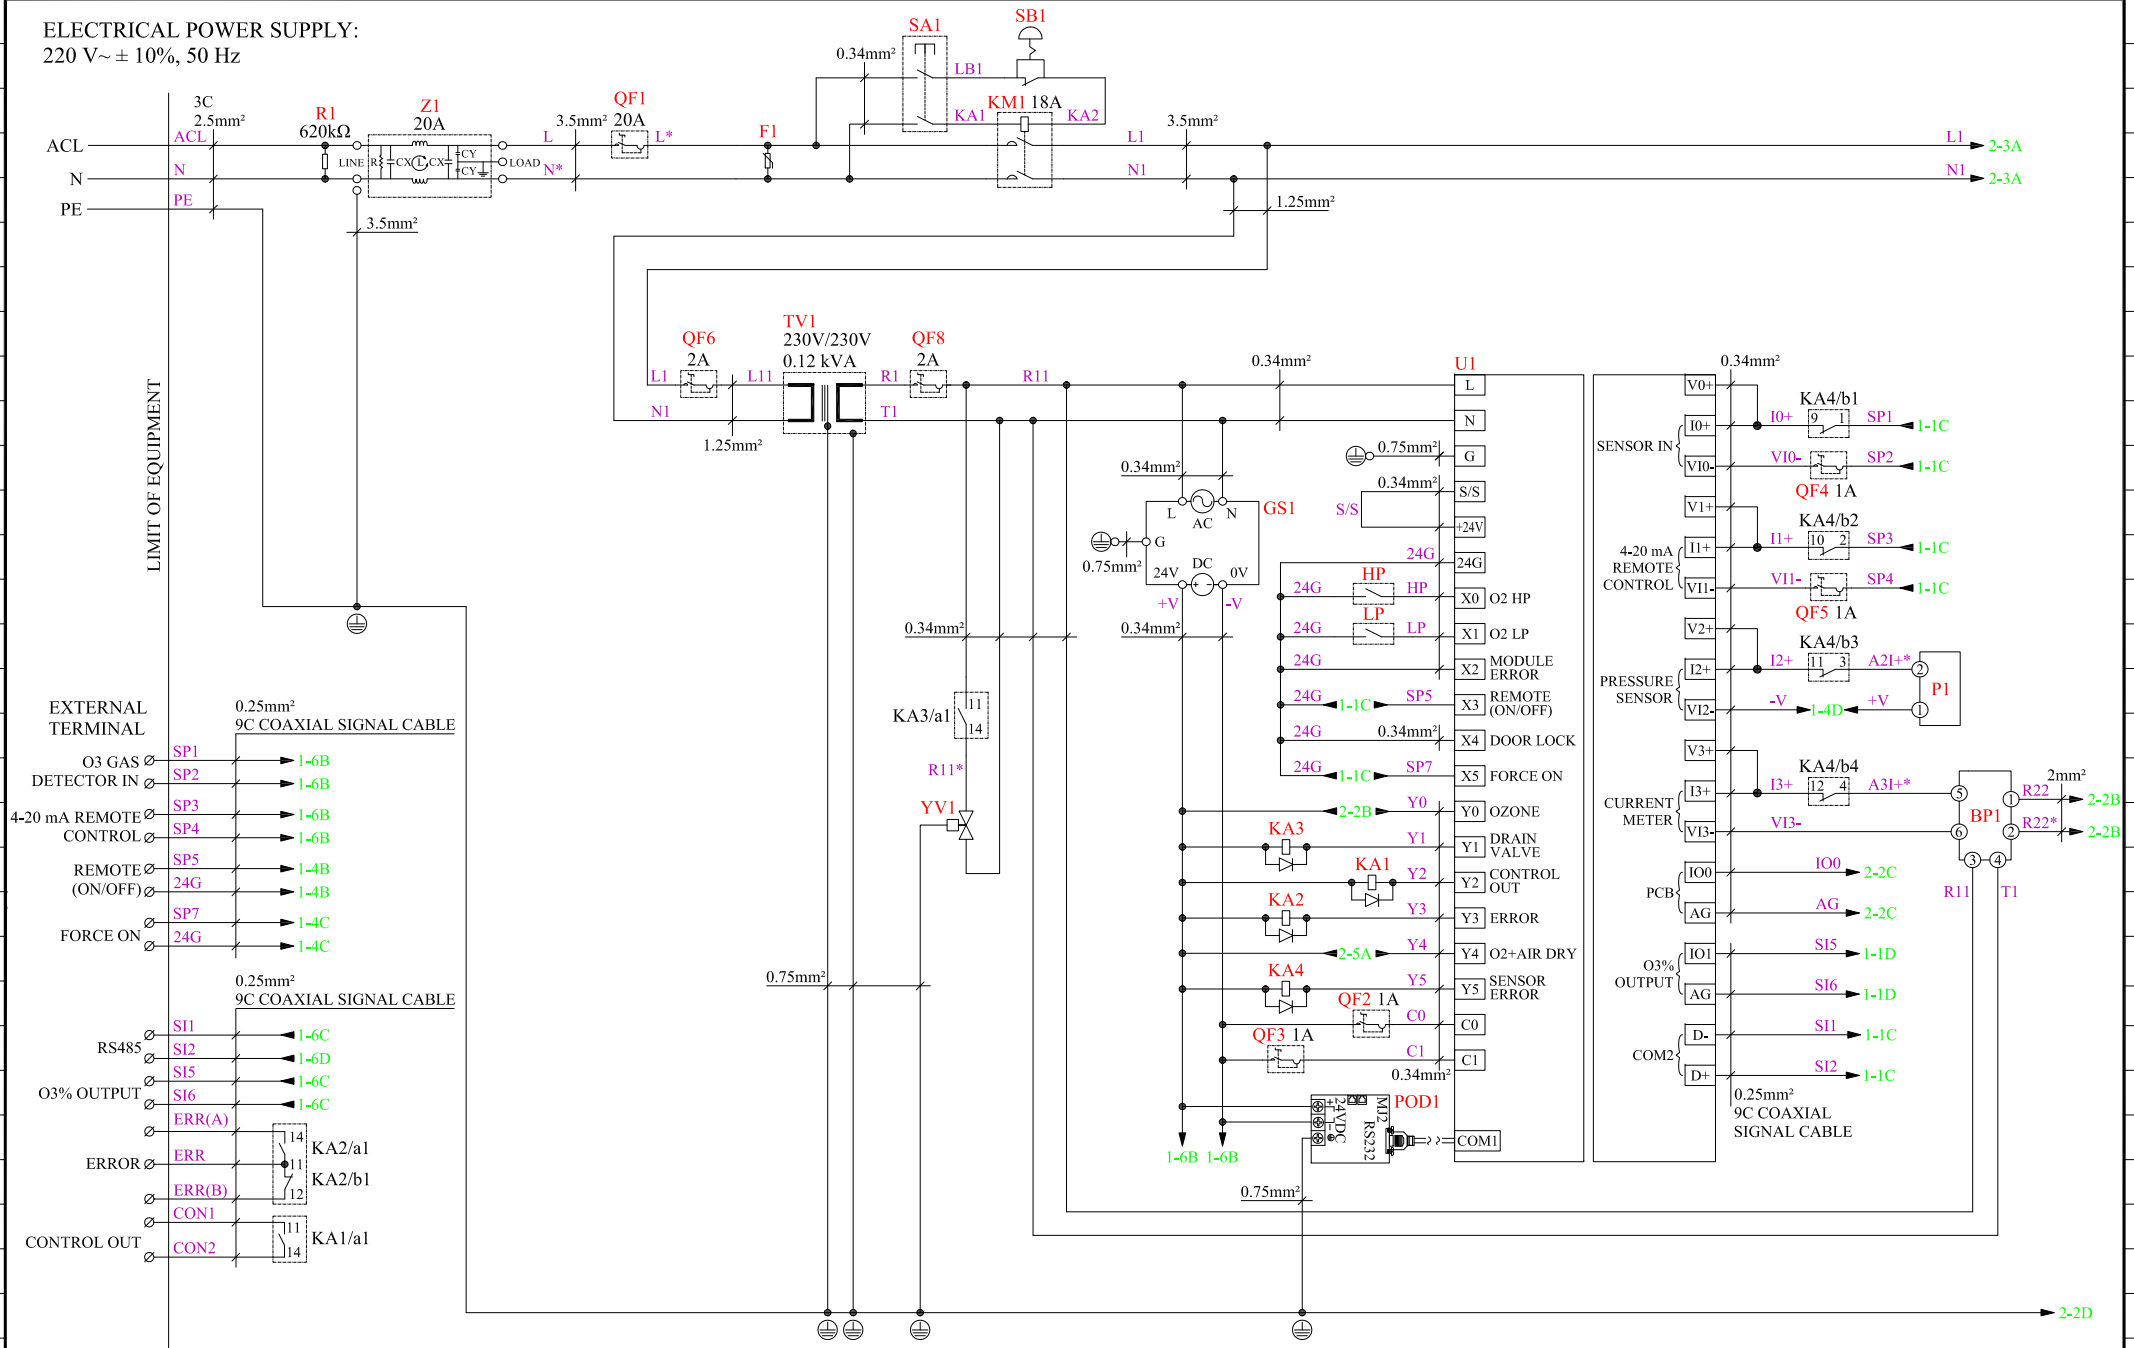

	DRAWN	CHECKED	APPROVAL
DATE	2018.10.30	2018.11.05	
NAME	LI-WEN	陳俊宏	

Air Physics Co., Ltd.


DRAWING NO.:1810301C

PAGE : 1/2

G-P60 ELECTRICAL DRAWING

Note:

BP1: AC CURRENT TRANSDUCER, 220 VAC, OUTPUT：4-20 mA, 0-10 A
C1: CAPACITOR, 450 VAC, 30 μF±5%, 50/60 Hz
EV1-3: AC FAN, 160*160*60 mm, 230 VAC, 50/60 Hz, 44/60 W
EV4-11: AC FAN, 120*120*38 mm, 230 VAC, 50/60 Hz, 28/33 W
F1: METAL OXIDE VARISTOR, 14D471K, 300 ACrms(V), 470 Vb(VDC)
GS1: POWER SUPPLY, INPUT:100-240 VAC, 50/60 Hz, OUTPUT:24 VDC
HP: HIGH PRESSURE SWITCH, 20 Psi
KA1: RELAY, 24 VDC, 6 A, 8PIN, FOR CONTROL OUT
KA2: RELAY, 24 VDC, 6 A, 8PIN, FOR ERROR
KA3: RELAY, 24 VDC, 6 A, 8PIN, FOR DRAIN VALVE (YV1)
KA4: RELAY, 24 VDC, 7 A, 14PIN, FOR SENSOR ERROR (P1)
KM1: MAGNETIC CONTACTOR, 220 VAC, 18 A
KM2-3: MAGNETIC CONTACTOR, 24 VDC, 9 A
LP: LOW PRESSURE SWITCH, 4 Psi
M1: AIR PUMP, 220-240 VAC, 50 Hz, 1200 W, 5.5 A
P1: PRESSURE SENSOR, 0-1.6 kg/cm²
POD1: HUMAN MACHINE INTERFACE, 24 VDC, class 2/110 mA
QF1: CIRCUIT BREAKER, 1P, 240 VAC, 20 A
QF2-5: CIRCUIT BREAKER, 1P, 240 VAC, 1 A
QF6: CIRCUIT BREAKER, 1P, 240 VAC, 2 A
QF7: CIRCUIT BREAKER, 1P, 240 VAC, 16 A
QF8: CIRCUIT BREAKER, 1P, 240 VAC, 2 A
QF9: CIRCUIT BREAKER, 1P, 240 VAC, 3 A
QF10: CIRCUIT BREAKER, 1P, 240 VAC, 10 A
QF11: CIRCUIT BREAKER, 2P, 400 VAC, 16 A
R1: PRECISION METAL FILM RESISTOR, 1 W, 620 kΩ
SA1: POWER SWITCH, 4PIN, 250 VAC, 16 A
SB1: EMERGENCY STOP, 240 VAC, 3 A
TV1: VOLTAGE TRANSFORMER, 200-230 VAC/200-230 VAC, 0.12 kVA
TV2: VOLTAGE TRANSFORMER, 200-230 VAC/170-180 VAC, 1.8 kVA
TV4: VOLTAGE TRANSFORMER, 807981
U1: PLC, DVP20EX2, INPUT:100-240 VAC, 50/60 Hz
U2: PCB, HB2000
U3: TIMING BOARD, 220V
YV1: SOLENOID VALVE, 230 VAC, 50/60 Hz, 1/4"PT, NC
Z1-2: EMI FILTER, 125/250 VAC, 50/60 Hz, 20 A
Z3: MOLECULAR SIEVE MODULE, 230 VAC, 50/60 Hz

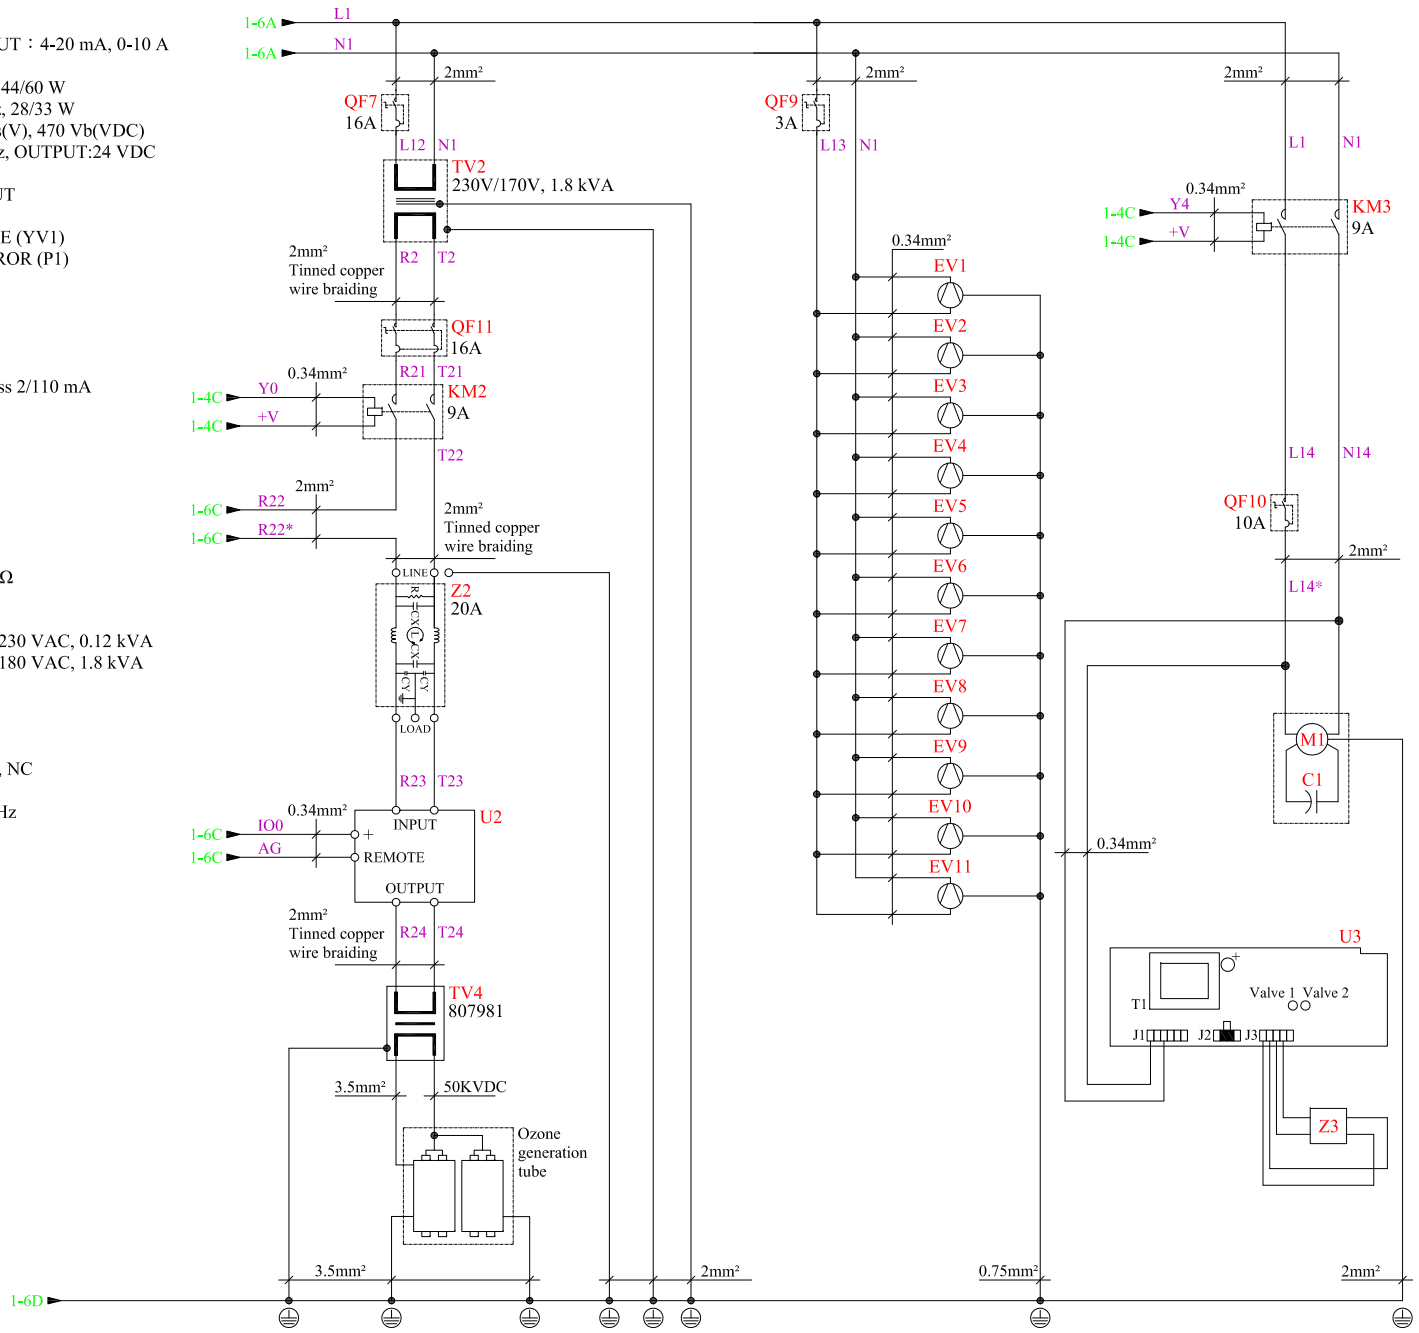

	DRAWN	CHECKED	APPROVAL	Air Physics Co., Ltd.	DRAWING NO.:1810301C	PAGE : 2/2
DATE	2018.10.30	2018.11.05				
NAME	LI-WEN	陳俊宏			G-P60 ELECTRICAL DRAWING	