
SV

Standard filter housings for sanitary applications

- Suitable for fine and ultra-fine applications
- All models hold P7 bayonet locked filter elements – O.R. 226
- Easy maintenance – quick release system to hold the bell
- Easy to clean - low roughness of the inner surface and unique design of the removable internal parts
- Minimum internal volume to reduce loss of product
- Sanitary design allows full access to all parts
- Accurate surface treatment




OPTIONAL FITTINGS
FOR SV SERIES




- Pressure gauge/vent assembly
- Drains & sampling ports on application



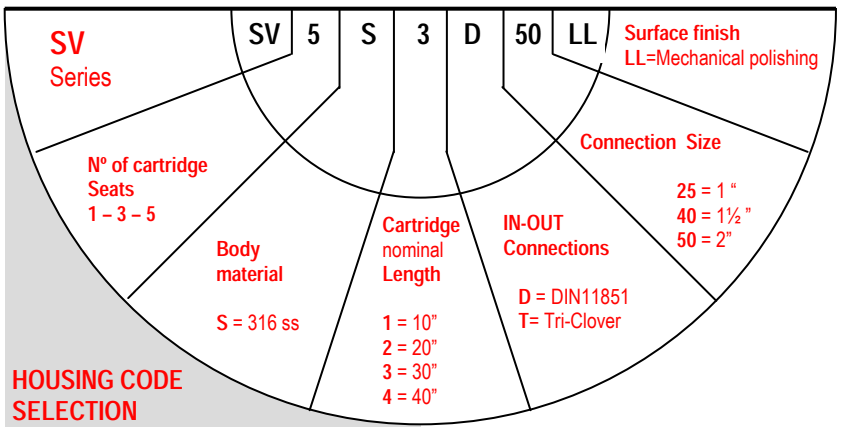


Single cartridge SV 1

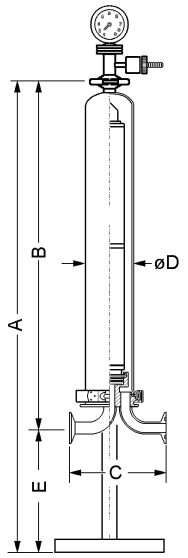

	Type	N° of cartridges	Cartridge configuration	Dimensions mm A	B	C	ø D	E	In-out connection size
SERIES 1	**SV1S1 #25 LL**	1 x 250 mm (10")	P7	685	470	204	101,6	215	# = T = ø1"
	SV1S2 #25 LL	1 x 500 mm (20")	P7	935	720	204	101,6	215	Tri-Clover
	SV1S3 #25 LL	1 x 750 mm (30")	P7	1185	970	204	101,6	215	# = D = DN25
	SV1S4 #25 LL	1 x 1000 mm (40")	P7	1435	1220	204	101,6	215	DIN11851

- Max operating pressure for all **SV** filter housings: 10 bar – Flow rates as per filter cartridge curves
- All dimensions correct at time of going to press. Filterflo reserves the right to modify dimensions without prior notice

Multi cartridge SV 3 and SV 5

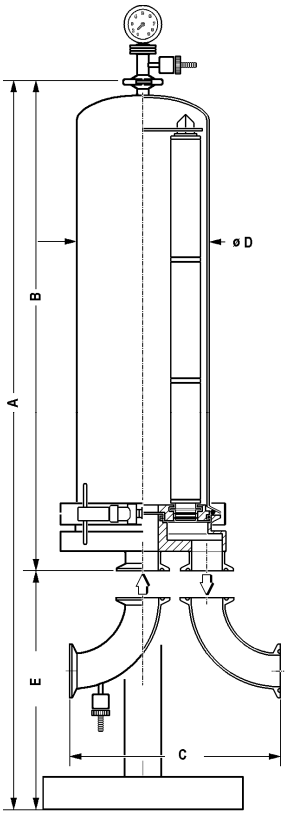

	Type	N° of cartridges	Cartridge configuration	Dimensions mm A	B	C	ø D	E	In-out connection size
SERIES 3	**SV3S1 #40 LL**	3 x 250 mm (10")	P7	959	495,6	284	168,3	463,4	# = T = ø1½"
	SV3S2 #40 LL	3 x 500 mm (20")	P7	1209	745,6	284	168,3	463,4	Tri-Clover
	SV3S3 #40 LL	3 x 750 mm (30")	P7	1459	995,6	284	168,3	463,4	# = D = DN40
	SV3S4 #40 LL	3 x 1000 mm (40")	P7	1709	1245,6	284	168,3	463,4	DIN11851
SERIES 5	**SV5S1 #50 LL**	5 x 250 mm (20")	P7	984,5	514,1	349	219,1	470,4	# = T = ø2"
	SV5S2 #50 LL	5 x 500 mm (20")	P7	1234,5	764,1	349	219,1	470,4	Tri-Clover
	SV5S3 #50 LL	5 x 750 mm (30")	P7	1484,5	1014,1	349	219,1	470,4	# = D = DN50
	SV5S4 #50 LL	5 x 1000 mm (40")	P7	1734,5	1264,1	349	219,1	470,4	DIN11851

- Max operating pressure for all **SV** filter housings: 10 bar – Flow rates as per filter cartridge curves
- All dimensions correct at time of going to press. Filterflo reserves the right to modify dimensions without prior notice

Filterflo S.r.l.
Via Copernico, 2/4
20082 Binasco MI
Tel. +39 02 9009 1439
Fax +39 02 9009 6393
e-mail: filterflo@filterflo.net