



- 21 Parameters
- Sheath Flow Impedance Method
- Easy Operation
- Cyanide-free reagents



3-Part
Differential WBC




Internal Thermal
Printer




Large Display
Screen

Innovative Technology


- Sheath Flow Impedance Method for RBCs/PLTs counting
- LED and receiver tube fully integrated - for greater HGB stability
- Performs rapid and accurate analysis of 21 parameters

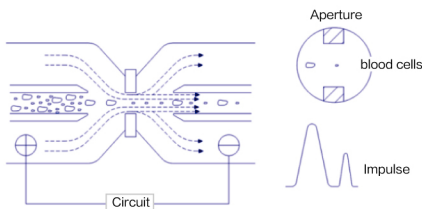

Sheath Flow Impedance Method



LED and Receiver Tube fully integrated





Sample Analysis

High Accuracy and Reliability

- Proven technology for accuracy of results
- Linearity to support clinical diagnostics and monitoring

Easy Operation and Maintenance

- Intuitive software menus
- Comprehensive QC information
- Barcoded reagent management
- One-click troubleshooting
- Daily maintenance time reminder: Convenient for daily work



Safe and Secure

- Non-toxic, biodegradable reagent system
- Two basic reagents (diluent and lyser) for complete results

Specifications

Principles & Technologies	WBC: Impedance Method RBC, PLT: Sheath Flow Impedance Method HGB: Colorimetric Method	
Parameters	Whole Blood (WB) and Pre-Dilute (PD) Mode; 21 parameters WBC; LYM#; MXD#; NEUT#; LYM%; MXD%; NEUT%; RBC; HGB; HCT; MCV; MCH; MCHC; RDW-CV; RDW-SD; PLT; MPV; PDW; PCT; P-LCR; P-LCC;	
Histogram	WBC (3-Part Differential), RBC, PLT	
Throughput	Whole Blood Mode: 60 samples/hour Pre-Dilute Mode: 50 samples/hour	
Sample Volume	WB Mode: 14 µL PD Mode: 20 µL	
Performance	Linearity WBC 1.0 x 10 ⁹ /L~99.9 x 10 ⁹ /L RBC 0.3 x 10 ¹² /L~7.0 x 10 ¹² /L HGB 20 g/L~280 g/L PLT 20 x 10 ⁹ /L~999 x 10 ⁹ /L	Precision (CV%) ≤ 2.0% (7.0 x 10 ⁹ /L~15.0 x 10 ⁹ /L) ≤ 3.5% (4.0 x 10 ⁹ /L~6.9 x 10 ⁹ /L) ≤ 2.0% (3.5 x 10 ¹² /L~6.5 x 10 ¹² /L) ≤ 1.5% (100 g/L~180 g/L) ≤ 4.0% (150 x 10 ⁹ /L~500 x 10 ⁹ /L) ≤ 5.0% (100 x 10 ⁹ /L~149 x 10 ⁹ /L)
Data Storage	50,000 complete sample results with histograms	
Screen Type	10.4" LCD color touch screen	
Quality Control	2 QC programs: L-J QC and X-Mean QC; 15 QC files	
Peripheral Options	Internal Thermal Printer (include) Optional External Printer (not include) Serial Port (RS-232) LAN (TCP/IP) 4 USB Ports	
Power Source	(100~240 V) AC; 50 Hz/60 Hz; 300 VA	
Store and Shipping Conditions	-10°C~40°C; 10%~90% Relative Humidity; 50 kPa~106 kPa	
Operating Conditions	15°C~30°C; 30%~85% Relative Humidity; 70 kPa~106 kPa	
Dimensions	340 mm*465 mm*425 mm	
Weight	≤ 25 kg	

Ordering Information

Product Name	Catalog No.	Components		Kit Box Dimensions (L x W x H)	Carton Dimensions (L x W x H)	Number of Kits/Carton
HA-360 3-Diff Automatic Hematology Analyzer	C111-9011-201	1 HA-360 Analyzer 1 Quick Start Guide 1 Printer Paper Roll	1 Power Cable 1 Instruction Manual	615 × 490 × 650 mm		1
HA-360 3-Diff Automatic Hematology Analyzer (With Barcode Reader)	C111-9021-201	1 HA-360 Analyzer 1 Barcode Reader 1 Quick Start Guide	1 Printer Paper Roll 1 Power Cable 1 Instruction Manual	615 × 490 × 650 mm		1
3D Hematology Reagent (Cyto-Diluent)	C121-9011-201	1 Barrel (20L/Barrel)		305 × 305 × 295 mm		1
3D Hematology Reagent (Cyto-Lyser)	C121-9021-201	1 Bottle (500 mL/Bottle) 1 Package Insert		85 × 82.5 × 166 mm	463 × 270 × 208 mm	15
3D Hematology Reagent (Mi-Po Cleaner)	C121-9031-201	1 Bottle (50 mL/Bottle) 1 Package Insert		44 × 44 × 88 mm	485 × 255 × 223 mm	100
3D Hematology Control	C121-9041-201	1.5 mL x 3 levels (Low, Normal and High level Control)		94 × 25 × 52 mm	365 × 355 × 385 mm	18

We also offer other rapid diagnostic and medical products for:
Blood Glucose, Lateral flow, POCT Products, Immunoassay, Molecular Diagnostics and more.
Contact us for worldwide distribution and custom manufacturing (OEM) opportunities

✓ CE Marked for sale in the European Community



All right reserved. Programs and Specifications subject to changes without prior notice, please contact local distributors.



www.aconbio.com

ACON Biotech (Hangzhou) Co., Ltd.
No.210 Zhenzhong Road, West Lake District,
Hangzhou, P.R.China, 310030
Tel: +86-571-8777 5737
Fax: +86-571-8777 5781
Email: information@aconlab.com.cn