

# FV Mechatronik

$$f = \frac{1}{8,3ms} = 120Hz$$

LB 1927 Motor Treiber

24 Pole 2  
2 Pole

5 RLS  
300 RPM

5V-Logic

3-4 RLS

Start/stop: high when open

active low!

Forward/Reverse:

-||-

Lock detection

output

LB 1870 Scanner Spiegel Motor

1 ☐ ~~24V~~ geht!

2 ☐ GND

3 ☐ S/S? start stop


active low!

4 ☐ LD lock detection output

500Hz bis 7kHz

5 ☐ E.CLK mit R13 & C17 Tiefpass

Lichtschranke

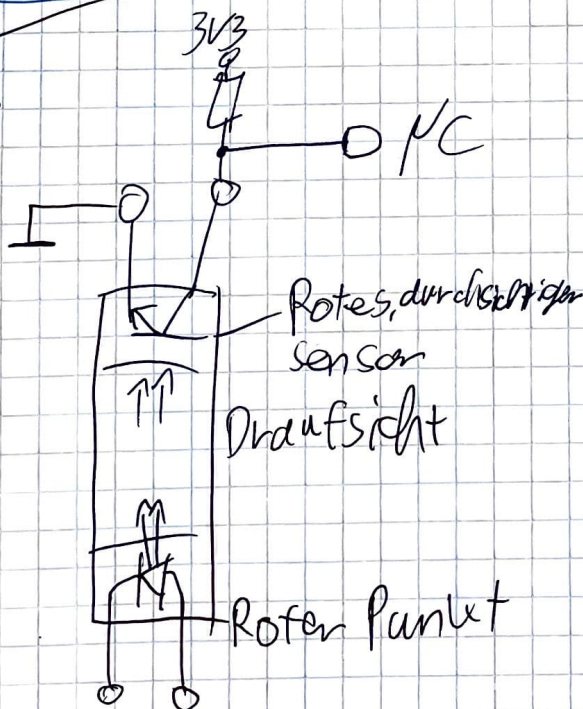

| LED  | Transistor |
|------|------------|
| 10mA | 235NA      |
| 20mA | 450NA      |

$$U_d = 1V \approx 1,15V$$

$$I_d \approx 10mA$$