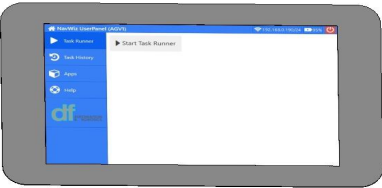


DF Automation & Robotics Sdn Bhd Maintenance Form

FRM/CS/015-V1.0

Customer Details		AMR Details	
Company		AMR Model	
PIC Name		AMR Serial Number	
Servicer Name		Last Service Date	
Date		Mileage Reading	
		Last Service Mileage	

*only applicable for zalpha 3.3




Tick ✓ If Applicable Recommended Service / Replacement Request ☐ Castor Replacement Every 6 months ☐ Wheel Replacement Every 6 months ☐ Battery Replacement Every 12 months ☐ Bumper Replacement Every 18 months ☐ Obstacle Sensors As per condition ☐ Line Sensors As per condition ☐ Drive Module Every 18 months ☐ Navigation Fine Tune As per condition ☐ Line Sensor Calibration As per condition ☐ Wiring Harness Every 12 months ☐ Manual Charger Socket Cover As per condition ☐ Fuse As per condition Mainboard Version : _____ Navwiz Version : _____ Additional Request Service Signature: Date: Customer Signatures: Date:	LCD Surface Scratch/Crack X Blacken/Flickering O  ☐ No Touch Responses ☐ Not Display/Blur/Brightness Hardware Functionality Inspection Tick ✓ If Full Function ☐ Line Sensor Front ☐ Line Sensor Rear ☐ Bumper Front ☐ Bumper Rear ☐ Obstacle Sensor Front ☐ Obstacle Sensor Rear ☐ Panel ☐ LED Blink Control ☐ IO Expansion ☐ Charger Manual ☐ Charger Auto ☐ RFID (Additional) ☐ Motor Left ☐ Motor Right ☐ Top LiDAR (live map) ☐ Front bottom LiDAR (live map) ☐ Rear bottom LiDAR (live map) ☐ Battery Voltage:_____V
--	--

Zalpha Body

Body Surface Condition:
X crack/scrap (body area)

Tick ✓ if condition body OK


☐ OK

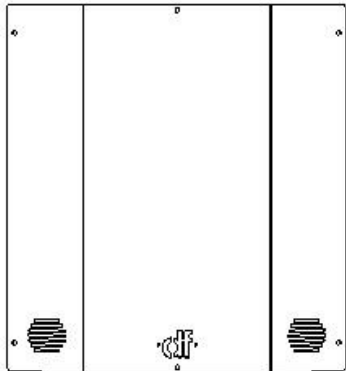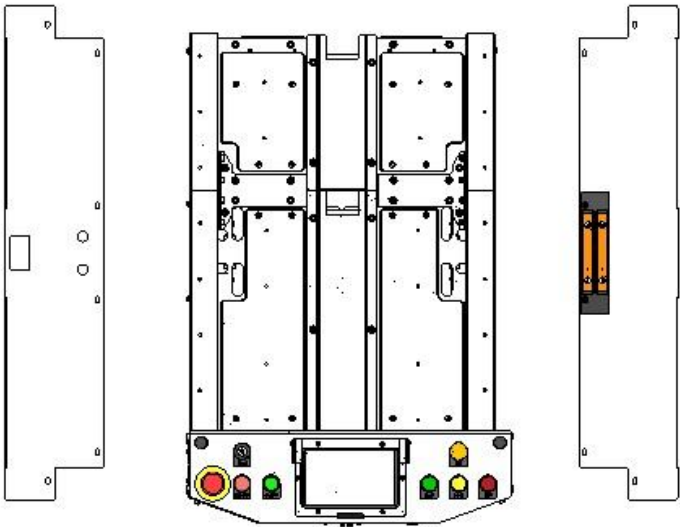

Inspection Results

1 - Check OK2 - Require Future Attention3 - Require Immediate Attention

Bumper Bushing, Limit Switch and Cushion

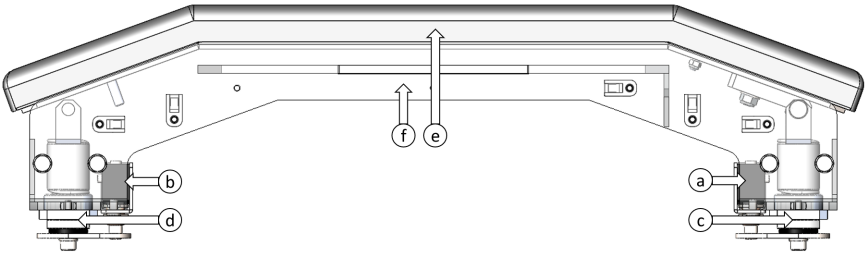

1	2	3	Parts Inspection
			a) Front Right Bumper Limit Switch
			b) Front Left Bumper Limit Switch
			c) Front Right Bumper Bushing
			d) Front Left Bumper Bushing
			e) Front Bumper Cushion
			f) Front Bumper Frame
			a) Rear Right Bumper Limit Switch
			b) Rear Left Bumper Limit Switch
			c) Rear Right Bumper Bushing
			d) Rear Left Bumper Bushing
			e) Rear Bumper Cushion
			f) Rear Bumper Frame

Manual Charger Socket

Socket Cond.: X Broken / Scratch
O Burn Marked



☐ Cap Cover missing / damage

Auto Charger Plate

Socket Cond.: X Broken / Scratch
O Burn Marked / decolorize



Others Remarks:



Wheel Thickness

LeftRight

More than 2 mm		More than 2 mm	
1 mm to 2 mm		1 mm to 2 mm	
Less than 1 mm		Less than 1 mm	

Wheel Rubber Peel Off

LeftRight



Castors Surface Cond.: X crack O wear off

Front LeftFront Right




Front LeftFront Right



Castors Swivel

Tick ✓ if damaged or cannot rotate



Front Left	
Front Right	
Rear Left	
Rear Right	

Final Touch

☐ Clean Obstacle Sensor Screen

☐ Clean LiDAR Sensor

☐ Clean LCD Screen

☐ Clean AMR's Body

☐ Clean Charger Plate

Next Periodic Maintenance:	Servicer Signature:	Customer Signatures:
	Date:	Date: