
TolTEC Raw-Timestream Conditioning

Learn–Resolve–Apply Filtering, Response,
and Scientific Consequences

Science-Team Rationale

Scientific contract version	v0.1
Science-team rationale revision	r0.8
Date	2026-08-18
Authority	Shared normative core in <code>src/common/</code>
Status	Draft for scientific-owner review
Method	Implementation-blind scientific authorship

Scope of this revision. It defines why RTC operations are selected, how paired x/r readout coordinates are retained, what is learned, what becomes immutable, how level shifts and leakage are represented, how astronomical modes are changed, and which claims remain available afterward. It does not claim implementation conformity, representation fidelity, observational performance, science qualification, validation, or production readiness.

Executive abstract

Raw-timestream conditioning is a scientific method over exact paired raw readout coordinates, not merely a sequence of array operations. Upstream authority maps measured IQ to one x/r pair per detector occurrence. RTC retains both: x is the required science-conditioning output path and the raw r parent is a diagnostic coordinate with independently represented validity. Spike-aware level-shift segmentation, later within-segment donor replacement, notches, and broad-band filters alter values, response, support, and covariance. Decimation changes temporal identity and can alias rejected modes into the retained band. Each choice can therefore change a point-source peak, effective PSF, centroid, extended-source response, calibration transfer, or scientific eligibility without changing a unit label.

SCI-RTC v0.1/r0.8 organizes those choices as **learn–resolve–apply**. Learn uses a declared population and diagnostics to estimate candidate parameters and uncertainty. Resolve combines that evidence with fixed policy and admits one complete immutable RTC plan. Apply executes exactly that plan and does not relearn or retune. An online adaptive filter is a different, time-varying estimator and remains unavailable unless separately authorized. Missing evidence or tolerances are not passes.

Each resolved response is evaluated against the astronomical temporal spectrum induced by the realized scan velocity, projected beam, source class, cadence, and preceding response. A fixed cutoff is not equally safe for all scan speeds or directions. A notch that removes an interference line also removes whatever astronomical response lies in its width. A detector-static **flxscale** cannot restore removed temporal modes, and calibration transfer across different RTC plans requires explicit response accounting or observational evidence.

The output is an atomic bundle of conditioned x , the immutable paired raw r parent, exact mapping and plan identity, response, timing convention, support, influence, validity, uncertainty status, and provenance. Raw x is not itself Stokes I and r is neither calibrated, substituted for x , nor silently passed through the x operator. Absolute **flxscale** and target atmosphere belong to a distinct downstream SCI-CAL product applied only to x . When a required predicate is unresolved, the affected operation or claim is explicitly unavailable. The shared formal core rendered in the companion Engineering Conformance PDF is the sole normative authority; Sections 1–12 explain its scientific meaning.

Reading rule. Narrative text explains the shared authority but cannot weaken a requirement, choose a missing numerical value, or convert an unavailable state into a pass.

Contents

1	Executive summary and present status	1
2	The learn–resolve–apply paradigm	2
3	Temporal frequencies, scan speed, and atmospheric variability	3
4	Paired IQ-to- x/r readout coordinates	4
5	Despiking, level shifts, and donor replacement	5
6	Optical leakage diagnostics from atmosphere and bright sources	7
7	Notch and broad-band filtering	8
8	Filter order, phase, registration, and composition	9
9	Decimation and alias control	10
10	Masks, segment boundaries, state, and non-finite handling	11
11	Calibration handoff and downstream interpretation	12
12	Covariance, support, eligibility, validation, and open decisions	13

1 Executive summary and present status

RTC is the scientific transformation from an admitted aligned paired x/r detector stream to a conditioned x output with immutable raw r parentage and explicit causal diagnostics. Its temporal, detector-mixing, selection, and cross-coordinate selection and uncertainty dependence are explicit. Its fixed-state numerical response has no $r \rightarrow x$ branch. Its purpose is not to make every sample finite or every spectrum smooth. Its purpose is to address declared contamination and sampling problems while preserving a quantitatively adequate response for the intended astronomical estimator.

The v0.1 scientific method is learned-then-fixed. Evidence may be learned from a declared population, but application begins only after resolve has produced one complete immutable plan. Online adaptation is a different estimator and is unavailable in this revision. Fixed plans use the same resolve and apply discipline even when no parameter is learned from the observation.

Every operation is interpreted through ten questions: purpose, signal model, operator, design parameters, learning, resolution and application, astronomical consequences, calibration consequences, validation, and unavailable states. Those questions are applied below to despiking, donors, masks, notches, broad-band and general filters, state, boundaries, non-finite handling, level shifts, optical leakage diagnostics, atmospheric-template evidence, and decimation.

The current document is a draft for scientific-owner review. It establishes no production numbers. Open decisions remain open in the ledger; their dependent operations are unavailable. The formal core defines algebraic and semantic authority only. Implementation conformity, representation fidelity, observational performance, science qualification, and production readiness are explicitly unassessed.

Present decision boundary. The owner is being asked to approve the scientific architecture and later resolve the enumerated numerical and policy choices—not to infer those choices from current software or historical practice.

Role-specific RTC plans. The roles share one paired raw signal boundary and one operator order, but they do not inherit one another’s learning population, plan, interval, cadence, or consumer. “Selected” below means owner-resolved for that role; unresolved entries remain unavailable rather than inheriting a software default.

Role	Learning population	Ordered paired RTC operations	Parameters frozen
Beammap	Exact designated Beammap scans	Exact aligned paired xs/rs parent $\rightarrow$ spike-aware shift segmentation $\rightarrow$ selected within-segment x donor/filter $\rightarrow$ phase-zero selection	Complete Beammap RTC plan and paired lineage
Pointing	Exact designated Pointing scans	Same paired classes, separately selected; optional classes remain disabled unless selected	Complete paired Pointing RTC plan
OOF	Exact designated OOF scans	Same paired classes, separately selected; optional classes remain disabled unless selected	Complete paired OOF RTC plan
Science	Exact selected science observation or scan set	Same paired classes, separately selected; optional classes remain disabled unless selected	Complete paired Science RTC plan
Diagnostic	Exact named parent and diagnostic sample set	Explicit selected paired subset; no science-role inheritance	Complete diagnostic-only paired plan

Role	Apply interval	Output cadence	Response-sensitive consumer
Beammap	Named half-open Beammap interval	Realized raw RTC grid	SCI-BEAM; later SCI-CAL handoff
Pointing	Named half-open Pointing interval	Realized raw RTC grid	Pointing/SRC and AST consumers
OOF	Named half-open OOF interval	Realized raw RTC grid	OOF/SRC response inference
Science	Named half-open science interval	Realized conditioned x grid with paired raw r lineage	SCI-CAL handoff and any explicitly authorized raw-domain consumers; subsequent PTC, VAL, MAP, and FLT use follows their own contracts.
Diagnostic	Exact declared interval	Declared raw diagnostic grid	Named diagnostic consumer only

2 The learn–resolve–apply paradigm


RTC begins with a scientific question: which contaminant or sampling problem must be addressed while retaining adequate astronomical response? The answer is not an operation name. It is a lifecycle that identifies evidence, converts it into a fully specified plan, and applies that plan without hidden adaptation.

Learn. Learn uses a declared population: a separate training interval, a designated part of the same observation, a collection of scans, an observation aggregate, or another named population. It may estimate spike statistics, line centers and widths, filter bands, tap candidates, masks, scan classes, decimation candidates, donor groupings, quality, and uncertainty. For paired streams it may also estimate optical r/x leakage, atmospheric templates, level-shift events, plateau state, and cross-coordinate covariance. Each diagnostic carries estimator, unit, support, selection, and failure state. Learning from the observation later conditioned makes the operator data-dependent. Conditional linear response at fixed state does not eliminate selection bias or parameter-estimation uncertainty.

Resolve. Resolve combines evidence with owner-approved policy. It accepts or rejects every scientific predicate and produces one immutable plan containing sequence, coefficient identity, rates and conventions, order, bands and tolerances, notch state, applicability, masks, donor policy, edges, guards, resets, decimation phase, output timing, expected response/support, uncertainty, and downstream compatibility. Missing evidence or tolerance leaves the dependent plan unresolved.

Apply. Apply consumes exactly one resolved plan. It does not move a notch, change a cutoff or tap count, switch donor policy, change decimation, silently fall back, or refit a parameter. Restart restores the same plan and rejects incompatible inputs. Realized state records what ran without rewriting the request or resolved plan.

V0.1 also permits **bounded iterative notch-plan refinement**. This is an outer finite sequence of actual attempts over complete accepted plans, with a separately configured finite maximum. Parameters may change only after one apply has finished and a successor attempt has admitted a new complete plan. A rejected or stop attempt does not advance the accepted-plan index or manufacture an evaluation product. Each apply remains immutable. This is the v0.1 scientific meaning when “adaptive notch” is used; it is not continuous coefficient tracking and is not the online-adaptive estimator of SCI-RTC-DEF-025.

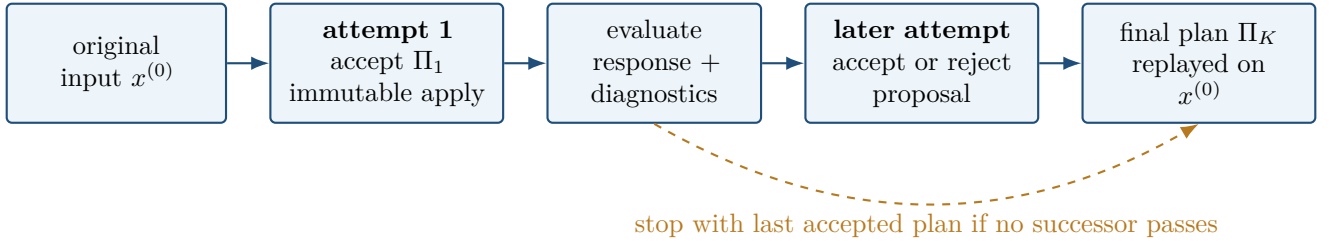

Attempt a learns from an exact population and the evaluation product of the current accepted plan Π_{k_a} . Resolve returns a complete cumulative proposal $\tilde{\Pi}_a$ and a typed accepted, rejected, or stop disposition. Only acceptance advances the plan index and creates a new evaluation product. The initial evaluation is explicitly $x^{\text{eval},(0)} = \mathcal{A}_{\Pi_0}(x^{(0)})$, including when Π_0 is a nonidentity fixed plan. A successor proposal names all retained, modified, removed, or rejected notches and every broad-band, state, mask, edge, timing, and decimation choice. It is never merely “add this notch to whatever ran before.” The final production product normally replays Π_K against the original input, avoiding unintended repeated rounding, padding, state transients, duplicate filtering, stale masks, or ambiguous parentage.


A sequential cascade from the preceding filtered product is a different scientific operator. It is allowed only when selected explicitly and when every immutable intermediate parent, response, state, phase, support, covariance, and uncertainty is retained. Learned-then-fixed and online-adaptive filtering remain different: in the latter, parameters evolve inside one apply pass. V0.1 does not authorize that branch.

Lifecycle test. For each attempt identify its attempt index, current accepted-plan index, learning and parent products, complete proposal, predicates, and disposition. For each accepted plan show that apply did not modify it. Then identify the finite stop cause and the final selected plan. Actual attempts, configured maximum, and accepted plans are different counts; unused maximum attempts are not no-ops. If any link is absent, the refinement claim is unavailable.

3 Temporal frequencies, scan speed, and atmospheric variability

The same temporal frequency represents different angular structure in different scans. For a locally Gaussian effective beam with covariance Σ and angular scan velocity $\mathbf{v}$, the characteristic crossing time is formal identity SCI-RTC-EQ-023. It uses the beam projected along the actual scan direction, not merely a scalar array FWHM. Source extent, detector and telescope response, prior RTC stages, and cadence further shape the exact source-times-response spectrum.

High frequencies correspond to finer scan-direction structure. Low frequencies contain broad sky structure together with baselines, atmosphere, and slow instrumental behavior. These do not cleanly separate source and contaminant. A Gaussian is not band-limited; extended emission can share low frequencies with atmosphere; a coherent line can overlap a source crossing. The shorthand $f \sim v/\theta$ is pedagogical only.

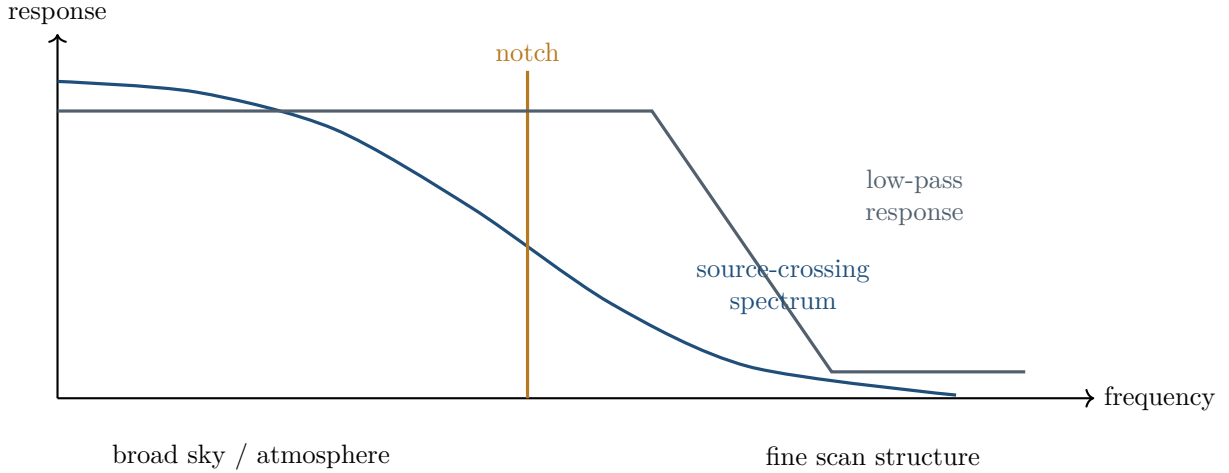

Changing speed moves astronomical modes relative to a fixed cutoff or notch; changing direction changes projected beam width. Every filter is assessed over declared speed, direction, beam, source extent, and source class using the exact realized response. Preserved dimensions or units do not establish preserved peak, PSF, centroid, extended response, or absolute mode.

Atmospheric fluctuations are also structured in time, detector, and readout coordinate. A raw atmospheric template may be scientifically useful because it can expose common optical response in x and r , but it is not the sample-dependent target-atmosphere correction owned by SCI-CAL. Its learning population, estimator, frequency support, detector grouping, masks, quality, uncertainty, and applicability all belong to the RTC diagnostic plan.


In v0.1 the template is optical excitation and diagnostic evidence only. It may inform leakage, Tune/readout health, artifact and level-shift assessment, or a declared selector, but it is not subtracted from science x . Numerical common-mode removal is a detector-mixing, response-changing estimator with null modes, covariance, source-mask dependence, and astronomical transfer of its own; it requires separate PTC or successor authority. This boundary avoids granting sky cleaning merely because the same atmospheric fluctuations are scientifically useful for measuring leakage.

4 Paired IQ-to- x/r readout coordinates

The acquired scientific object is an ordered pair, not two streams that may later be joined by row number. Upstream mapping authority converts measured in-phase and quadrature coordinates into x_{dj}^A and r_{dj}^A with one detector, sample, stream, and mapping-revision identity. RTC consumes that general mapping and, where applicable, its local Jacobian or affine representation, domain, applicability, validity, and provenance; it does not infer, globally linearize, repair, or silently replace it. A separate upstream ALIGN relation then produces the admitted x^A/r^A pair. RTC starts there: it retains ALIGN identity and may compose an optional end-to-end response to native acquisition coordinates, but its local operator does not apply ALIGN a second time.

Both members are required for every admitted occurrence. A missing partner is malformed input, but numerical or scientific validity is represented independently: valid r does not repair invalid x , and invalid r does not erase an otherwise valid x . Exact pair identity survives selection, segmentation, conditioned- x filtering/sampling, bundle construction, serialization, and restart without implying that r receives the x operator. The notation m_{native} denotes a native table row so that the physical r coordinate is never confused with a row index.

The roles of the members are intentionally asymmetric. Raw x is the ordinary science-conditioning path, but it is not itself Stokes I. Raw r is a diagnostic coordinate that can reveal optical response, level shifts, electronics behavior, and shared selection. V0.1 does not authorize automatic r -to- x correction, calibration of r , use of r as an x donor, or substitution of r for invalid x . Polarimetry remains outside scope. A separately conditioned r product would require its own declared operator, response, support, unit, validity, uncertainty, and provenance; it is not a required v0.1 output.

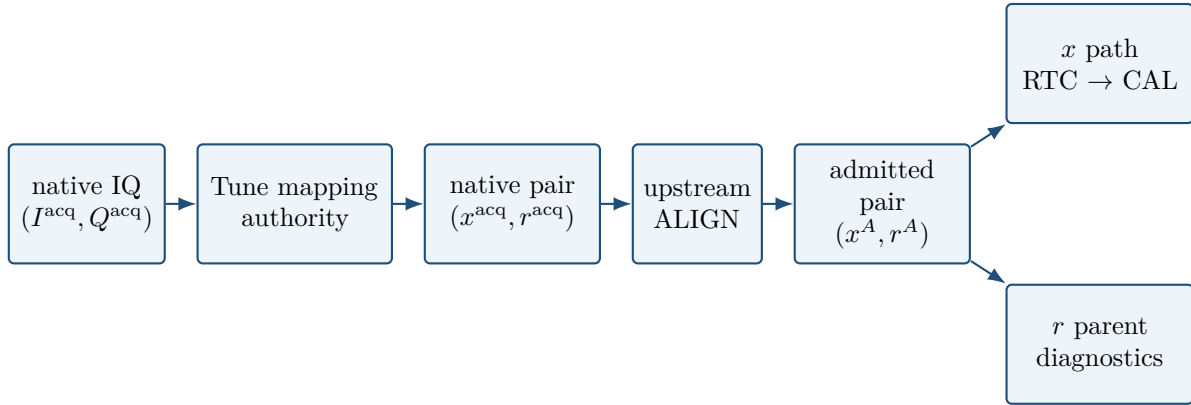

Paired statistics retain the full x/r covariance, common support, and any shared selector. At fixed resolved state, however, the numerical Jacobian is $[L^x \ 0]$: only x enters the conditioned value. The cross-coordinate blocks matter through selectors, learned parameters, diagnostics, model uncertainty, and cross terms rather than through an invented numerical r branch. At a selector boundary a total derivative may be unavailable. A block-diagonal or independent model requires evidence; it is not implied by coordinate names. This paired boundary applies equally to Beammap, Pointing, OOF, Science, and diagnostic-only roles.

5 Despiking, level shifts, and donor replacement

Despikes and level shifts are different contaminants. An isolated spike is a localized departure from the intended signal model. A level shift is a persistent paired offset change with a transition, pre/post plateaus, and a new coherent processing segment. Treating a shift as a cluster of spikes can replace real data and leave a biased plateau; treating a spike as a shift can unnecessarily reset a long filter.

The selected early architecture separates evidence exclusion from numerical replacement. Change-point learning uses the original aligned pair while candidate isolated spikes are excluded, masked, or robustly downweighted. It does not consume donor-substituted values. After level-shift boundaries are resolved, any admitted donor replacement operates only within a stable segment and no donor relation crosses an unresolved or accepted boundary. The plan records spike statistic, threshold, support, mask/downweighting, false-positive control, shift estimator, donor topology, and each resulting boundary.

A level shift is modeled in v0.1 as an additive baseline change, not as a gain or responsivity change. On each stable plateau, $x(t)$ is the intended signal plus a plateau baseline b_i . There is no present observational basis for an additional multiplicative degree of freedom. Evidence of a response change therefore blocks the additive interpretation; it does not cause RTC to fit a gain-changing model. Such models remain successor scope unless evidence requires this assumption to be reopened.

The physical/readout event has finite transition width. Each accepted event therefore records a network identity and detector-specific physical-time transition interval, or a conservative bound on that interval, plus timing coherence, separate x and r evidence or typed unavailability, quality, uncertainty, and cause. The corresponding sample set comes from the applicable timing vector. It is never defined as a fixed number of samples, a fraction of a scan or scan leg, or another scan-dependent quantity, so the same physical criterion remains meaningful across cadences and scan strategies.

Transition samples belong to neither stable plateau. They are explicitly flagged, excluded from both plateau estimates, and remain unmodeled even when the stable plateaus are offset-corrected. Later filters, donor replacement, or downsampling may expand their influence according to operator support, but the record preserves the distinction between underlying physical transition support and downstream propagated influence. The transition also delimits coherent segments. Reset is ordinary; carry is a separately authorized continuity exception. Multiple events retain ordered identities under the selected conflict and minimum-segment policy.

“Stable plateau” does not mean a numerically constant timestream. It means consistency with a declared local signal-plus-baseline model accounting for atmosphere, astronomical signal, noise, allowed slow variation, Tune state, valid support, and unresolved changes. Suitability depends on the resolved application context: an interval may support a readout-health diagnostic while being too short for PSD or notch learning, Beammap source inference, or Science. Sample count alone is not authority.

Pre- and post-shift stable plateaus compare their optical-leakage or more general paired response state on common support, or record that comparison as unavailable when optical excitation is inadequate. A material response change rules out an additive-only correction. When both plateaus have scientifically adequate stable support, RTC may estimate their additive level difference and translate one plateau to the declared reference. The resolved plan supplies the estimator, minimum support, quality and uncertainty criteria, reference plateau, and failure behavior. The inferred offset applies only to valid stable plateau cells, never to transition support. If support is inadequate, RTC invents no offset: the event remains a segment boundary, and the plan decides which usable plateau or plateaus are retained.

Normal production records need compact event and treatment state plus useful population summaries, not a mandatory permanent manifest of every detailed fit. Full event-by-event fits and diagnostic traces may remain verbose or diagnostic products. This economy changes neither the actual conditioning nor the explicit transition flags and segment state carried by ordinary products.

A **donor** is an admitted detector-time measurement used to construct a continuity surrogate for a rejected target x cell. The target retains its identity and replacement cause while donor information and covariance remain traceable. Under the approved raw convention, compatible valid `flxscale` values permit the factor ϕ_q/ϕ_d ; this transfers convention, not sky identity or calibration. The paired r member is never an x donor. Beammap donor factors come from identified prior authority, never the new factor derived from the same Beammap lineage.

The exact representative occurrence for a phase-zero output is (d, Mn) on the raw aligned paired parent. If that

occurrence is synthesized or replaced, the output is universally excluded as an independent detector measurement. A donor, maximum response coefficient, or support centroid does not replace this definition. Nonrepresentative influences preserve their causes and are routed to each downstream consumer's own eligibility policy.

6 Optical leakage diagnostics from atmosphere and bright sources

The r coordinate is not presumed optically dark. A source-dependent local model permits both x and r to respond, and SCI-RTC-EQ-032 defines a diagnostic ratio only where the x response is valid and nonzero. That ratio is not a universal detector correction. It is an evidence product with a source class, estimator, support, selection, uncertainty, validity, and response convention. Because the number depends on coordinate normalization, every product also retains x/r units or scales, mapping revision, normalization, metric, Tune/loading/epoch domain, and whether the ratio is dimensionless or carries a coordinate-unit ratio. A response angle is comparable only after a declared metric makes the axes commensurate.

Atmospheric variability provides one high-occupancy optical diagnostic. Its estimator must distinguish the selected atmospheric template or population, temporal and frequency support, detector grouping, masks, common-mode model, quality, and uncertainty. A measured x/r correlation is not by itself an unbiased optical-leakage coefficient: the estimator must address shared-data dependence, noise in both coordinates, and detector self-inclusion. Direct r -on-noisy- x regression is generally biased unless the selected method accounts for those effects. Leave-one-detector-out, joint latent-mode, cross-spectral, and other methods remain candidates rather than defaults. Because the atmosphere can share modes with sky signal and electronics, coherence alone does not establish optical origin.

A bright compact source provides a second diagnostic with different spatial and temporal support. It binds the source model, scan geometry, projected beam, background treatment, masks, fit, uncertainty, and source-class applicability. An atmosphere-derived and bright-source-derived value keep separate parentage. Agreement is useful evidence; disagreement is also a result. They are not averaged, substituted, or promoted as mutually validating without an explicit comparison model.

Each diagnostic states whether it is scalar, band-limited, or frequency dependent. A scalar fitted over one band cannot silently become authority outside it. If coordinate-specific preprocessing or filtering changes the two response domains differently, pre- and post-operation leakage estimates are distinct products. Their comparison includes common support and the applicable response. The atmospheric template itself is not subtracted from science x .

A leakage ratio or angle is not compared across detectors, Tunes, loading states, epochs, or mapping revisions merely because both values are finite. The comparison is available only when their coordinate conventions are compatible or an explicit transformation, normalization, and metric have been applied. Thus a change in readout-coordinate scale cannot masquerade as a Tune-health trend.

No leakage diagnostic in v0.1 authorizes automatic r -to- x correction, calibration of r , or a new donor route. Its immediate scientific purpose is to expose readout-coordinate response, detect regime changes, and provide traceable evidence for a later owner decision.

7 Notch and broad-band filtering

A notch suppresses a narrowband coherent disturbance while removing the same temporal modes from any astronomical signal. A resolved notch declares center, frequency/rate convention, width or Q, depth, family/order, poles/zeros where applicable, phase, group delay, state, transient, guard, applicability, uncertainty, and drift tolerance. A disappearing line is not by itself evidence that astronomical transfer, centroid, PSF, covariance, or edge support remains adequate.

Bounded iterative refinement is an outer succession of complete immutable plans. Each actual attempt learns from the evaluation of the current accepted plan, proposes a complete cumulative successor, and records an accepted, rejected, or stop disposition. Acceptance alone advances the plan index. The final plan normally replays once against the original input. A configured maximum is only a bound: an early stop creates no fabricated no-op attempts. Maximum-attempt, oscillating, or parameter-unstable termination is not convergence.

A low-pass may reduce high-frequency noise or prepare for decimation but can attenuate fast source crossings, broaden the PSF, and increase covariance. A high-pass can suppress drift or broad atmosphere while removing extended sky, beam wings, baselines, and absolute modes and producing negative lobes. A band-pass inherits both boundaries. The combined exact response, not the class label or preserved unit, defines what remains.

Learn identifies the contaminant and candidate design over a declared population. Resolve freezes every band, ripple, attenuation, family, order, precision, phase, state, mask, edge, and applicability field. Apply does not retune. Validation varies interference parameters, speed, projected beam, source class and extent, measuring residual, amplitude, centroid, PSF, extended transfer, ringing, support, covariance, and usable fraction.

8 Filter order, phase, registration, and composition

FIR tap count is a scientific design result, not an arbitrary integer. Formal identity SCI-RTC-EQ-025 chooses the smallest admitted order that passes transfer, alias, phase, support, guard, precision, and realizability predicates. An approximate family formula can initialize a search but cannot replace exact coefficients and response.

More taps can sharpen a transition while increasing support, covariance footprint, edge loss, ringing, and the range affected by a replacement or level-shift guard. Quantization can change ripple, attenuation, notch placement, and stability. Forward/backward filtering changes magnitude, effective order, state, and edge behavior even when ideal interior phase is zero.

Delay creates scan-direction displacement through formal identity SCI-RTC-EQ-027. A phase-zero selected grid point does not imply that the preceding response is centered there. Every role resolves zero phase, shifted time, coordinate correction, response-aware downstream use, or a quantitative bound on residual centroid and PSF effect.

Composition order is equally scientific. Spike-candidate masking or robust downweighting informs level-shift learning on the original pair; admitted shifts define state and donor boundaries; any x replacement then occurs inside stable segments; and all conditioned- x RTC operations precede SCI-CAL. Atmospheric-template diagnostics may affect declared selection and uncertainty but are not a numerical removal stage. Each realized x response is composed in the selected order.

Validation varies order/taps, family, precision, bands, shift boundaries, diagnostic-template strength, scan speed, beam, and source class while measuring amplitude, shape, delay, ringing, covariance, registration, and usable support. Coefficient algebra alone is not science qualification.

9 Decimation and alias control

V0.1 phase-zero downsampling is conditioned- x point selection $v^{x,\text{preD}}[Mn]$, not averaging and not anti-alias filtering. It changes cadence, Nyquist frequency, temporal identity, support, covariance, aliasing, and coordinate registration for the required x output while exact raw r parentage remains in the bundle. The preceding composed filter determines the rejected-band power that remains to fold.

Formal identity SCI-RTC-EQ-014 includes every folded image. Before resolving M , the exact conditioned- x prefilter must meet approved transfer and alias bounds over the declared source domain. A Gaussian is not band-limited, so safe means bounded residual transfer, not perfect preservation. Factor choice uses cadence, smallest projected crossing time, maximum valid scan speed, source class, output requirements, timing accuracy, and downstream compatibility.

The representative source occurrence is exactly (d, Mn) on the raw aligned paired parent. That identity is distinct from the assigned output time, the full transitive support, and the largest response coefficient. It drives the direct synthesized/replaced exclusion without converting every nonrepresentative influenced sample into universal ineligibility.

Selected time t_{Mn} does not erase earlier delay or broad support. Tests include paired impulses and tones, on/off-bin frequencies, varied scan speeds/directions, smallest-beam sources, incomplete strides, level-shift boundaries, reset behavior, and exact alias response.

10 Masks, segment boundaries, state, and non-finite handling

A mask is operator control, not acquisition validity or confidence. Source, spike, level-transition, guard, coordinate, and learning masks retain distinct causes, geometry, support, dilation, and boundary conventions. Invalid or wrong-frame coordinates do not become outside-mask samples. A flag does not automatically become a mask, zero weight, or universal eligibility decision.

Gaps, resets, and selected level shifts delimit coherent segments. FIR extension, rejection, reflection, zero padding, and local renormalization are different operators. IIR state requires explicit initialization, reset or carry, transient, stability, and terminal state. Reset is ordinary at an accepted shift. Carry requires separately authorized continuity, complete response, and a residual-contamination criterion; state never crosses merely because a policy field says “carry.” A guard removes or types outputs but does not prove a residual tail negligible without a quantitative criterion.

The realized event and segment state includes ordered shift identities, transition intervals, paired amplitudes, masks, guards, plateau diagnostics, short-segment disposition, ordinary reset, and any separately authorized carry decision. Optional operation classes remain disabled unless the role plan explicitly selects them.

A non-finite sample, coordinate, mapping value, factor, coefficient, or state is rejected, represented unavailable over its exact influence, or handled by an authorized prior recovery rule. It never silently becomes zero. Tests place impulses, sources, spikes, shifts, masks, and non-finites at every boundary and compare split/rejoined execution against the declared state semantics.

11 Calibration handoff and downstream interpretation

RTC distinguishes detector-static **flxscale**, an atmospheric leakage template used only as diagnostic evidence, sample-dependent target-atmosphere correction, detector mixing, and temporal filtering. RTC remains raw through the complete plan. A compatible valid **flxscale** ratio may transfer donor convention within raw x replacement, but it is not absolute calibration and never involves r .

Only after the complete RTC bundle exists may SCI-CAL consume the exact conditioned x member and apply absolute **flxscale** and target atmosphere. The raw r parent remains in the RTC bundle for traceability and diagnostics but receives neither the x conditioning chain nor SCI-CAL. This boundary does not assert that raw x is Stokes I.

Target-atmosphere correction at one output time is generally not the inverse of attenuation mixed across a temporal filter’s full support. In compact terms, output-time correction followed by an RTC result is not assumed equal to filtering individually atmosphere-corrected inputs. A CAL handoff therefore needs the complete RTC response over that support or a preregistered owner-approved noncommutation bound; a unit label or one output-time atmosphere value cannot supply the missing equivalence.

Filtering can preserve dimensions while changing source peak, PSF, extended response, phase, centroid, and covariance. Calibration cannot restore removed modes. A Beammap-derived factor belongs to its complete RTC lineage; a target conditioned with a different plan needs explicit response calculation, renormalization, or observational evidence before calibration transfer is scientifically available.

The Science consumer route is: “SCI-CAL handoff and any explicitly authorized raw-domain consumers; subsequent PTC, VAL, MAP, and FLT use follows their own contracts.” Pointing, OOF, Beammap, and diagnostic consumers also bind their exact paired parent and role plan. RTC does not assign their eligibility, weighting, mapping, or source-estimation policies.

Beammap circularity guard. New **flxscale** derived from a Beammap cannot be used as donor scaling inside that same Beammap RTC lineage; donor factors come from explicit pre-existing authority.

12 Covariance, support, eligibility, validation, and open decisions

Output dependence expands through paired mapping, alignment, spike and shift selection, within-segment donors, atmospheric diagnostic selectors, taps or state, boundaries, and sampling. Support—not storage shape—governs information flow. Reused donors correlate targets, overlapping filters correlate neighbors, shared x/r selectors create cross-coordinate covariance, and an IIR links every output to its declared state boundary.

At fixed realized state, the conditional moment equations apply $J_{\text{num}} = [L^x \ 0]$ to the admitted joint x/r model, so direct numerical covariance is $L^x \Sigma_{xx} (L^x)^\top$. The cross-coordinate blocks remain scientifically necessary because selection, leakage estimation, shift detection, learned templates, or notch parameters may depend on both members. Their consequences enter selection, learned-parameter, model, diagnostic, and cross-term uncertainty rather than fixed-state numerical propagation. Conditioning does not make those terms zero. Unknown covariance remains unavailable rather than diagonal, white, independent, or zero.

Eligibility differs from computability. V0.1 universally excludes an output whose exact representative occurrence (d, Mn) was synthesized or replaced as an independent detector measurement. Elsewhere in full support, RTC preserves value, response, typed cause, linkage, and influence while each consumer applies its own declared policy. Finite paired TOD without exact plan, support, response or typed unavailability, influence, validity, uncertainty status, and provenance is incomplete.

Algebraic fixtures are necessary but not sufficient. Validation varies the scientific design choices and measures the observables they can change.

Study	Variations	Measurements
Notch	center error, drift, width, depth, Q/order, state, direction, overlap	residual line, sky transfer, ringing, transient, amplitude, centroid, covariance, edge loss
FIR/bands	taps, edges, ripple, attenuation, family, precision, speed, beam, source extent	peak/shape, extended transfer, delay, ringing, alias, covariance, usable fraction
Donor	spikes, invalids, factors, sky mismatch, noise, reuse, sources, mask edges	stabilization, bias, covariance, influence extent, scientific data loss
Decimation	on/off-bin tones, speeds/directions, smallest beam, delay, aliases, strides, resets	retained/aliased transfer, timing, coordinate shift, PSF, support, edges
Paired/leakage	mappings, independent validity, atmosphere/source class, scalar/frequency response	pair fidelity, x/r covariance, leakage bias, pre/post response, unavailable states
Level shift	spike adjacency, network/detector times, amplitudes, multiple events, guards, short segments, reset/authorized carry	event accuracy, false detection, plateau bias, state leakage, response and data loss

Each study preregisters domain, estimator, tolerance and falsifier. Passing coefficient algebra does not establish science qualification. Observational performance, science impact and production readiness are separate layers.

The owner ledger retains numerical or methodological authority for mapping tolerances and validity; leakage and level-shift estimators; plateau support; atmospheric leakage diagnostics; learned populations; filter designs; edges/state; decimation/alias; registration; uncertainty; and bundle form. Resolved architecture includes the paired stream, diagnostic-only atmospheric templates, spike-aware original-pair shift learning before within-segment replacement, conditioned- x output with raw- r lineage, x -only CAL handoff, representative occurrence, and downstream ownership. Online adaptation remains deferred. An open entry blocks only its named operation or claim and never authorizes a default or silent fallback. Cross-package follow-up routes CAL, BEAM, AST, PTC, VAL, MAP and filtering questions without letting RTC assume their answers.

Success criterion. For every operation, a scientist can explain paired input authority, purpose, learned evidence, resolved numerical choice, immutable application, level-shift/segment state, leakage and atmosphere treatment, changed astronomical modes, response and calibration effects, validation evidence, and remaining unavailable claims.