

[Sensors](#)

Light & Imaging Sensors

Gravity: ESP32-S3 AI Camera Module(SKU: DFR1154)

Gravity: IR Positioning Camera For Arduino(SKU: SEN0158)

HUSKYLENS GC2093 Microscope Imaging Module(SKU: SEN0683)

RS485 Photosynthetically Active Radiation (PAR) Sensor (400-700nm)(SKU: SEN0641)

AI Binocular Face, Palm Vein & QR Code Recognition Sensor(SKU: SEN0677)

RS485 Waterproof Ambient Light Sensor (0-200,000 Lux)(SKU: SEN0644)

Gravity: Analog Ambient Light Sensor(SKU: DFR0026)

RS485 Photoelectric Solar Radiation Sensor (400-1100nm)(SKU: SEN0640)

MS-A075V RGB-D TOF Camera Module(SKU: SEN0583)

Gravity: BH1750FVI Waterproof Digital Ambient Light Sensor(SKU: SEN0562)

Gravity: TCS34725 RGB Color Sensor(SKU: SEN0212)

[wiki](#) / [Sensors](#) / [Light & Imaging Sensors](#) / [SEN0644](#)

RS485 Waterproof Ambient Light Sensor (0-200,000 Lux)

[Buy now](#)

SKU: SEN0644

This is a completely waterproof digital ambient light sensor that measures the intensity of light in different environments with a detection range of 0~200Klux. It uses the standard Modbus-RTU 485 communication protocol and a DC5-32V wide voltage power supply. It can be used with the TTL to RS485 expansion board (DFR0259) or the Gravity: Active Isolated RS485 to UART Signal Adapter Module (DFR0845) to read the light value on the Arduino UNO R3, quickly build a test environment, and has a simple wiring method and is easy to use. The ambient light sensor has an IP68 waterproof rating and can be completely immersed in water without damage. It is suitable for various indoor and outdoor harsh environments such as weather stations, vegetable greenhouses, outdoor lighting, flower cultivation,

[TOP](#)

factory workshop lighting,
and automotive smart lights.

DOWNLOADABLE RESOURCES

☐ Dimension

Docs Tech Specs

Specification

Parameter	Value
Power supply voltage	DC5~32V
Working current	<10mA
Output mode	RS485
Measurement range	0~200000Lux
Resolution	0.01Lux
Accuracy	±5%
Working temperature	-40°C~+80°C
Protection level	IP68
Thread length	10mm
Opening size	25mm
Wrench size	33mm
Cable diameter	4~10mm
Line length	1m


Pinout



Num	Label	Description
Red line	VCC	Power input positive pole, DC5~32V power supply
Blue line	GND	Power ground wire
Yellow line	485-A	RS485 data line A

☐ TOP

Num	Label	Description
Green line	485-B	RS485 data line B

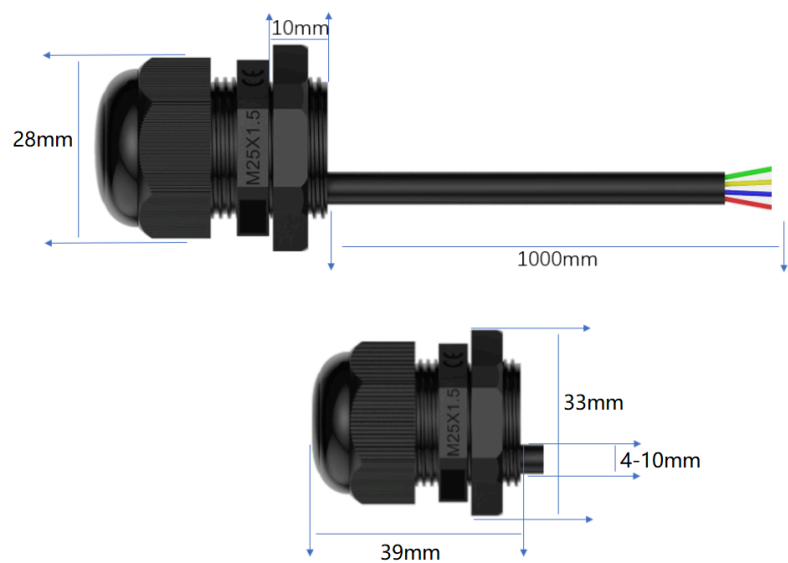

FAQ

What are the possible reasons for no output or output errors?



Any reasons for no output or output errors



[Explore More Related Questions >](#)

Was this article helpful?



Information

[About Us](#)

[Warranty](#)

[Terms & Conditions](#)

[Shipping](#)

[Payment](#)

[FAQ](#)

Customer Service My Account

[DFRobot Distributors](#)

[Contact Us](#)

[Site Map](#)

[Affiliates](#)

[Specials](#)



Sign up for exclusive offers!

Your email address



Like us on



TOP