


MASK (red dash-dot) = NO-PAINT coating mask, NOT a cut: bare-metal bonding land around the M6 earth stud, BOTH faces. The M3 thread pilots are tapped AFTER painting, so they need no mask.
Segno BASE 2.0mm x1 bottom + front/rear/sides fold up (bend ded 1.91); WELD-FREE: rivet the 4 corners via L-brackets; rear 2nd fold = transition (flange FULL width, seats on the relieved side-wall tops); FOLD with the DRAWN side as the INSIDE face (canonical mirror: encoder lands on the player's LEFT)

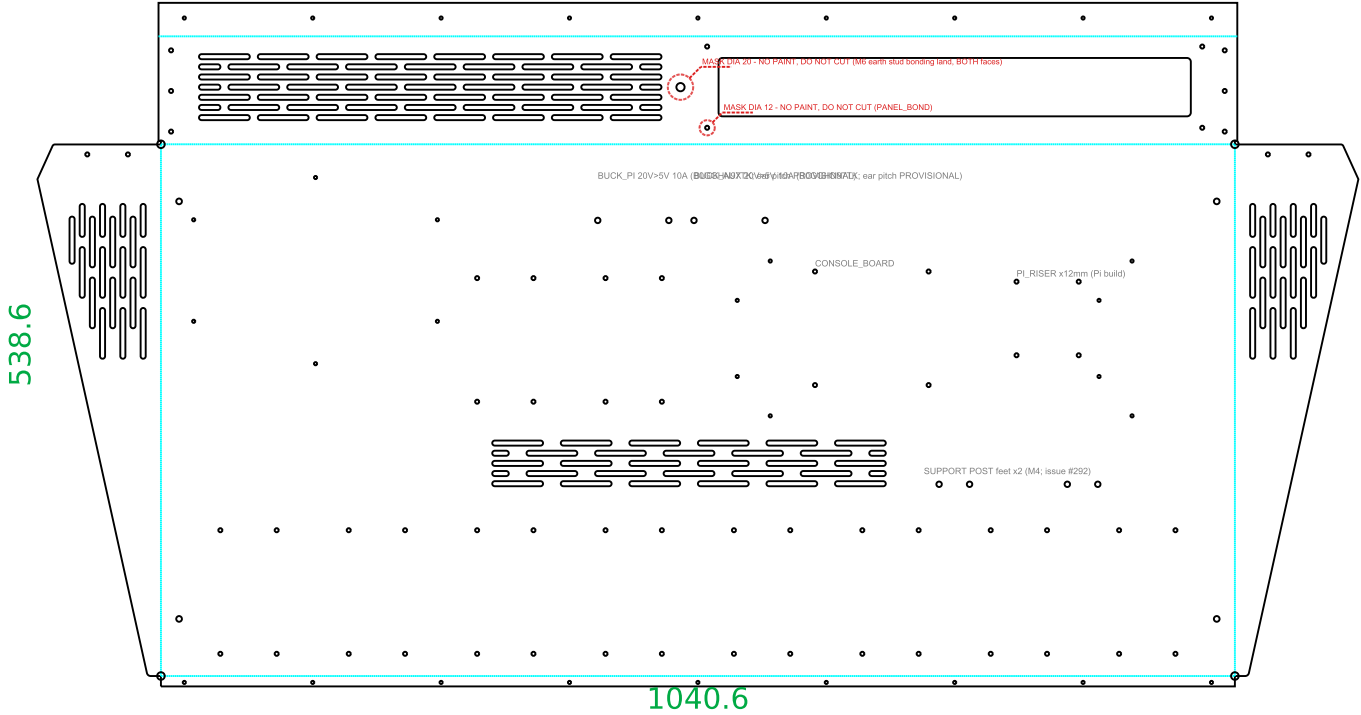

BEND TABLE (rotation = angle the flap turns THROUGH from flat; included = 180 - rotation)

#	FOLD LINE	POSITION	LENGTH	ROTATION	INCLUDED	DIRECTION	Ri	DEDUCTION
1	rear -> transition	y = 504.05	849.8	65.556 deg	114.444 deg	UP, toward drawn face	2.0 mm	1.054 mm
2	front wall	y = 0.00	846.0	90.000 deg	90.000 deg	UP, toward drawn face	2.0 mm	1.911 mm
3	rear wall	y = 419.00	846.0	90.000 deg	90.000 deg	UP, toward drawn face	2.0 mm	1.911 mm
4	left wall	x = 0.00	419.0	90.000 deg	90.000 deg	UP, toward drawn face	2.0 mm	1.911 mm
5	right wall	x = 846.00	419.0	90.000 deg	90.000 deg	UP, toward drawn face	2.0 mm	1.911 mm

K-factor 0.33 | bend allowance = rad(fold) x (Ri + K x T) | flat flap = outer length - deduction. ROWS ARE IN FOLD ORDER - do not resequence. Sides (4,5) need a punch <= 410 mm: the 4 x DIA 6.0 corner reliefs open 413 mm between the standing front and rear walls.

Gauge 4 and 5 off the formed front/rear wall faces (the side flange is a wedge and is not square to its bend). V12 die throughout; Ri 2.0 mm is mandatory - if with-grain cracking appears STOP, do not open the radius, the flat must be re-developed.

Segno loopstation enclosure

BASE | 2.0 mm 5052-H32 aluminium | QTY 1 | units mm | bend Ri 2.0 mm, K-factor 0.33

CUT + VENT = THROUGH-CUT (both, same operation) | BEND = FOLD LINE REFERENCE ONLY - do not cut, score, etch or mark | MASK = no-paint coating mask, DO NOT CUT | NOTE / ENGRAVE / SILK = lettering, not geometry