


Attach a W5500 SPI-Ethernet module to the DUT

All six GPIO are configurable in LuxDMX (/config -> W5500 card, or set ethcs/ethsck/...). The DUT is already set to these. Wire to these pins and you only need to flip "use Ethernet" once the module is connected; or wire anywhere free and change the config.

ESP32-S3 (DUT)

W5500 module

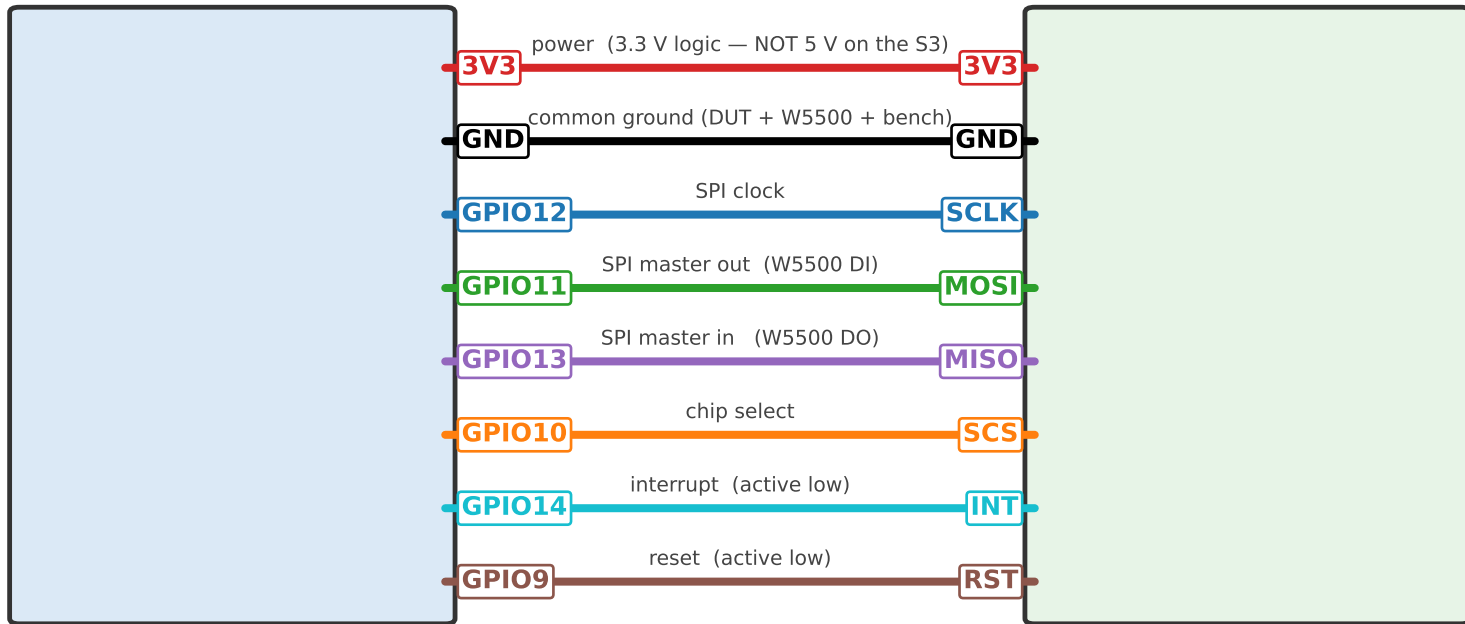

Keep SPI wires short. If the link is flaky on long/loose wiring, lower the clock: set ethfreq 1

These six GPIO (9-14) do not touch the DMX/RDM pins under test (TX17 · EN8 · RX18) — the RDM bench is undisturbed.