A-SAFE

FlexiShield Corner Guard

PRH-1046-A-SAFE-5122023-1

Production

Dimensions (mm/inches)

A 100 / 4

B 1000 / 39⅜

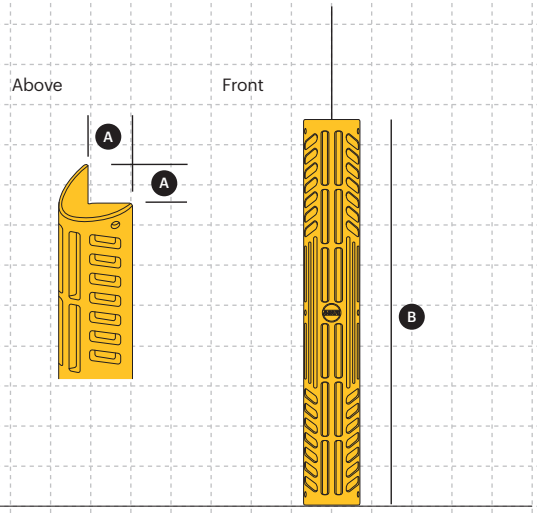

Product Material

Post and rails

MEMAPLEX™

Ultimate strength polymer created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

Revolutionary 3-Layered Material
- Inner strengthening core
- Central impact absorption zone
- Outer UV stabilised colour layer

Fixings

Steel

Weight of product

Per FlexiShield Corner Guard	
One size only	1.64 Kg / 3.62 lbs

Colour Combination

Standard

Standard Black
RAL 9005*
PANTONE Black

Standard Yellow
RAL 1007*
PANTONE 7548*

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

Minimum order quantities

Not applicable on this product

Suitability

Environment

Internal use only

ATEX Suitability

Not suitable in an explosive atmosphere

Standard Fixing

Fixing kit - 6 x 4 x 40 flat head screw and plugs

Vehicle Suitability

Pedestrians	Manual Pallet Truck	Electric Pedestrian Stacker	Frame Rail Container

Fit for purpose application

Building and equipment protection

Impact Zone
0 - 1000mm
(0 - 39⅜ inches)

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	10^{15} - 10^{16} Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent ** Light stability scale 1 is very poor and 8 is excellent

Fire information

Manufactured from polypropylene. Polypropylene has an ignition temperature of 370º Celsius which is significantly higher than materials such as wooden pallets or polymers such as flexible PVC. This means that for combustion of an A-SAFE barrier to occur, a facility fire would need to be both large and well advanced, by which time any personnel would have already been evacuated to safety.

Polymer has been engineered to remain stable up to a temperature of 350º Celsius. In contrast, PVC starts breaking down at between 249º Celsius and 273º Celsius, and materials such as wood will burn instantly.

Our material has been specially developed to minimise the release of smoke during combustion. Furthermore, unlike environmentally hazardous polymers like PVC, it does not release harmful dioxins, hydrogen cyanide or hydrogen chloride when burnt.

Environmental information

Research conducted by a leading plastic solutions company* showed that producing one metric tonne of polymer generates less carbon emissions than producing a tonne of steel**. Therefore, from the very outset of raw material production, polymer provides a significant CO_2 saving over steel.

For more information visit A-SAFE.com

* http://www.borealisgroup.com ** www.liloontheweb.org.uk/handbook/carbonfootprint

Recycling Information		
Packaging	Corner Guard	Fixings
Mixed Recycled	5	Steel

Part Codes

1. R-01-01-0002 - Flexishield Corner Guard, YEL (G)
2. R-01-01-0003 - FlexiShield Corner Guard, BLK
3. 1x B-02-02-0053 Fixing Kit -(6x) 4 x 40 flat head screw + plugs (G)

Data Sheets

CAD

Install Documents

If you have any questions please contact
the product management team at A-SAFE HQ
Product.Management@asafe.com

A-SAFE
PIONEERING WORKPLACE SAFETY

PRODUCTHUB

Document Reference	PRH-1046-A-SAFE-5122023-1
Document Description	FlexiShield Corner Guard
Date Created	December 2023
Author/s	Matthew Briggs
Checked by	Alex Dougherty / Nathaniel Hyde
Approved by	Ben Allen
Revision	Version 1 - December 2023