A-SAFE

Heavy Duty Topple Barrier

PRH-1019-A-SAFE-15022024-2

Production

Dimensions (mm/inches)

A	230 / 9	H	185 / 7⅔	O	3352 - 132		
B	230 / 9	I	302 / 11⅞	P	3892 - 153⅜		
C	22 / ⅞	J	652 - 25⅔	Q	4432 - 174½		
D	100 - 4	K	1192 - 47	R	4972 - 195¾		
E	190 / 7½	L	1732 - 68⅛	S	5264 - 207¼		
F	190 / 7½	M	2272 - 89⅜	T	2020 - 79½		
G	205 / 8	N	2812 -110⅝	U	3652 - 143⅝		

Base



Above



Front

Heavy Duty Topple Barrier 5.3m

Heavy Duty Topple Barrier 3.6m

Heavy Duty Topple Barrier 2.08m

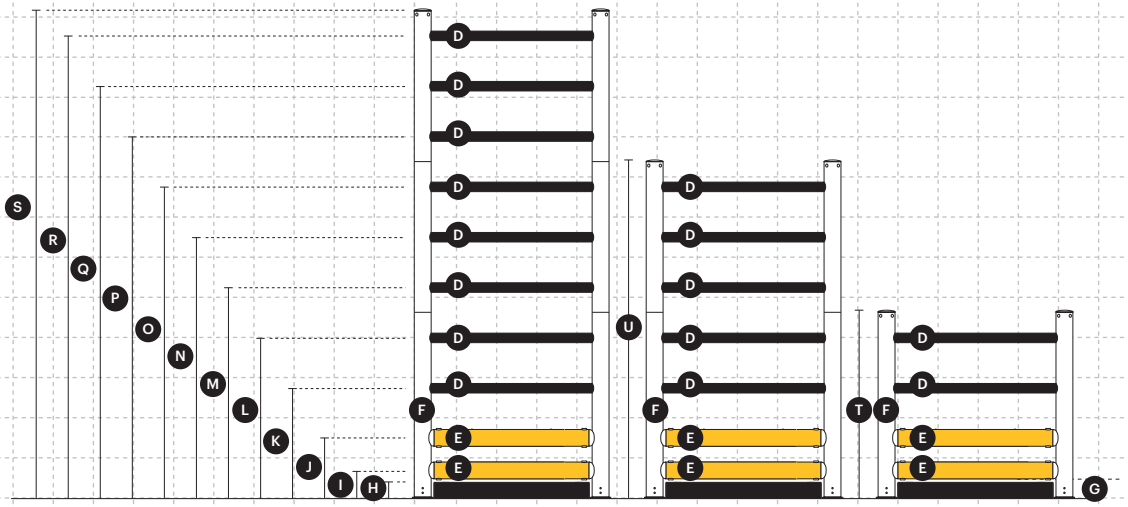

V Post centres mm (inches) - 1200 (47¼), 1800 (70⅝), 2400 (94½)

Colour Combinations

Standard

Post
Standard Black
RAL 9005*
PANTONE Black

Rails
Standard Yellow
RAL 1007*
PANTONE 7548*
Standard Black
RAL 9005*
PANTONE Black

Non-standard

Post
Standard Yellow
RAL 1007*
PANTONE 7548*

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

Product Material

Post and rails MEMAPLEX™

Ultimate strength polymer created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

Revolutionary 3-Layered Material

- Inner strengthening core
- Central impact absorption zone
- Outer UV stabilised colour layer

Standard base	Zinc nickel, electrophoretic coating
Fixings	Steel

Weight of product

Posts	5.3m / 208⅔	3.6m / 141¾	2.08m / 81⅝
End Post	50.00 Kg / 110.23 lbs	36.17 Kg / 79.74 lbs	22.36 Kg / 49.30 lbs
Mid Post	58.00 Kg / 127.87 lbs	43.04 Kg / 94.89lbs	28.14 Kg / 62.04 lbs

Rails

Typical Rail Length	Rail Diameter (mm/inches)	
	100 / 4	190 / 7½
1500 / 59”	2.63 Kg / 5.79 lbs	7.26 Kg / 16 lbs
2000 / 78¾	3.62 Kg / 7.98 lbs	10.18 Kg / 22.44 lbs
2500 / 98⅜	4.6 Kg / 10.14 lbs	13.11 Kg / 28.90 lbs

Minimum order quantities

Not applicable on this product

Suitability

Environment

Internal and External use

ATEX Suitability

Not suitable in an explosive atmosphere

Standard Base and Fixing

Zinc nickel, electrophoretic coating

18mm Hex Head Through Bolt, Z/P

Vehicle Suitability

Engine Counterbalance Heavy Duty Forklift Truck	Heavy Duty Counterbalance Truck	High Rack Stacker	Electric Reach Truck	Mini Van	Pedestrians

Fit for purpose application

High level topple protection	Traffic and pedestrian segregation

Impact Zone
205 - 745mm
(8 - 29⅓ inches)

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	10^{15} - 10^{16} Ω
Hygiene Seals	Yes

* Weathering scale 1 is very poor and 5 is excellent ** Light stability scale 1 is very poor and 8 is excellent

Fire information

Manufactured from polypropylene. Polypropylene has an ignition temperature of 370º Celsius which is significantly higher than materials such as wooden pallets or polymers such as flexible PVC. This means that for combustion of an A-SAFE barrier to occur, a facility fire would need to be both large and well advanced, by which time any personnel would have already been evacuated to safety.

Polymer has been engineered to remain stable up to a temperature of 350º Celsius. In contrast, PVC starts breaking down at between 249º Celsius and 273º Celsius, and materials such as wood will burn instantly.

Our material has been specially developed to minimise the release of smoke during combustion. Furthermore, unlike environmentally hazardous polymers like PVC, it does not release harmful dioxins, hydrogen cyanide or hydrogen chloride when burnt.

Environmental information

Research conducted by a leading plastic solutions company* showed that producing one metric tonne of polymer generates less carbon emissions than producing a tonne of steel**. Therefore, from the very outset of raw material production, polymer provides a significant CO_2 saving over steel.

For more information visit A-SAFE.com

* http://www.borealisgroup.com ** www.liloontheweb.org.uk/handbook/carbonfootprint

Recycling Information			
Packaging	Post and Rails	Fixings	Bases
Mixed Recycled	5	Steel	Steel

*Fixings

Fixing Type	Item No.	Description	Nom. Drill Hole (W)	Min. Drill Depth	Wrench Size	Torque Setting	Qty per Pack	Per Post
Standard	B-02-01-0038	18mm Hex Head Through Bolt, Z/P	18mm / 11⁄16"	125mm / 5"	19mm / ¾"AF	80Nm / 60ft/lb	4	1
Countersunk	B-02-01-0041	18mm CSK SKT Head Through Bolt, Z/P	18mm / 11⁄16"	125mm / 5"	10mm / ⅜"AF	80Nm / 60ft/lb	4	1
**Chemical/Resin	B-02-01-0058	Chemical Anchor Stud 20x260mm Z/P	22mm / ⅞"	130mm / 5⅛"	30mm / 13⁄16"AF	80Nm / 60ft/lb	1	4
***Removable	B-02-01-0043	Internal-threaded anchor socket M16, Z/P	24mm / 15⁄16"	160mm / 6 5⁄16"	-	80Nm / 60ft/lb	1	4
	B-02-02-0009	M16x40mm Hex Head set screw z/p			24mm / 15⁄16"AF		1	4
	B-02-02-0015	M16 Form A Washer z/p					1	4

Resin Tube	B-02-01-0046	Chemical Resin 380ml tube

** 1no Tube of resin required per 6no fixing bolts *** 1no Tube of resin required for 8no fixings bolts

Ground Works

Before you install A-SAFE barrier we advise a site survey of the ground intended for the product. This information is crucial as the ground conditions can vastly affect the performance of the safety barrier.

We should always request to see the Operations and Maintenance Manual (OMM) for the building we are installing barrier. This document will give key information such as -

- Depth of concrete slab installed
- Areas where rebar is being used
- Areas where services are located in the building
- Operating temperatures of the facility

If an OMM is not available, we should request to produce an on-site pull-out test. The pull-out test gives us all the information we need to evaluate if an install is possible.

For more information please refer to the Ground Works document in the Product Hub on the A-SAFE SharePoint.

Concrete Pad

190mm OD Post
18mm Fixing Bolts
230 x 230mm
Base Plate

- A Concrete Pad
- B Hardcore
- C Damp Proof Membrane

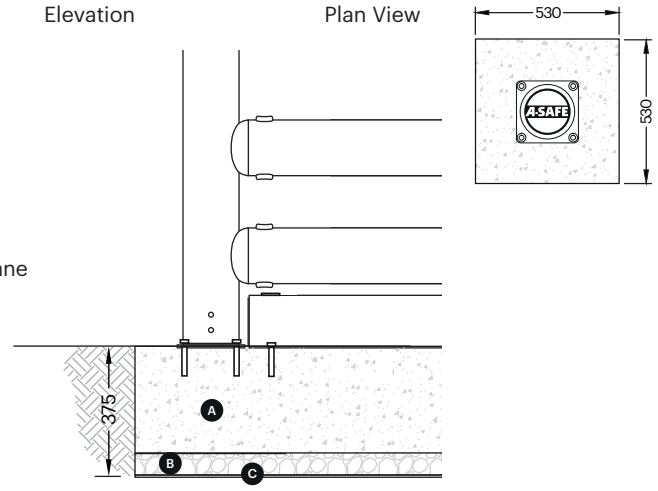

Dimensions of the concrete pad shown are a minimum size only.

***IMPORTANT.** The fixings data detailed above are based on A-SAFE supplied fixings. If a customer uses their own fixings, they must refer to specific install instructions.

Part Codes

1. S-01-07-0129 - Topple Barrier 2m Post, BLK -End
2. P-02-01-0212 - Topple Barrier 1620mm Post, BLK -End
3. P-02-01-0214 - Topple Barrier 1620mm Top Section, BLK -End
4. P-01-03-0002 - Post Pin 36 OD x 1950mm
5. P-01-03-0094 - Post Pin 36 OD x 1350mm
6. P-01-03-0095 - In-line Coupling Spacer - 800mm
7. M-01-01-0002 - 190 Single Cap, BLK-YEL
8. M-01-01-0053 - 190 Lock Pin, BLK-YEL (Top)
9. M-01-01-0010 - Pin Plug, YEL
10. M-01-01-0059 - Long Lock Pin - 190
    M-01-01-0031 - Lock Pin Cap - BLK
11. S-01-02-0042 - 190 Coupling & sleeve (TPE)
12. M-01-01-0004 - 190 Coupling Cover, BLK-YEL
13. B-03-02-0108 - Post Pin Stop Insert
14. B-02-01-0038 - R-SPL-II-12125/25L (4pk)

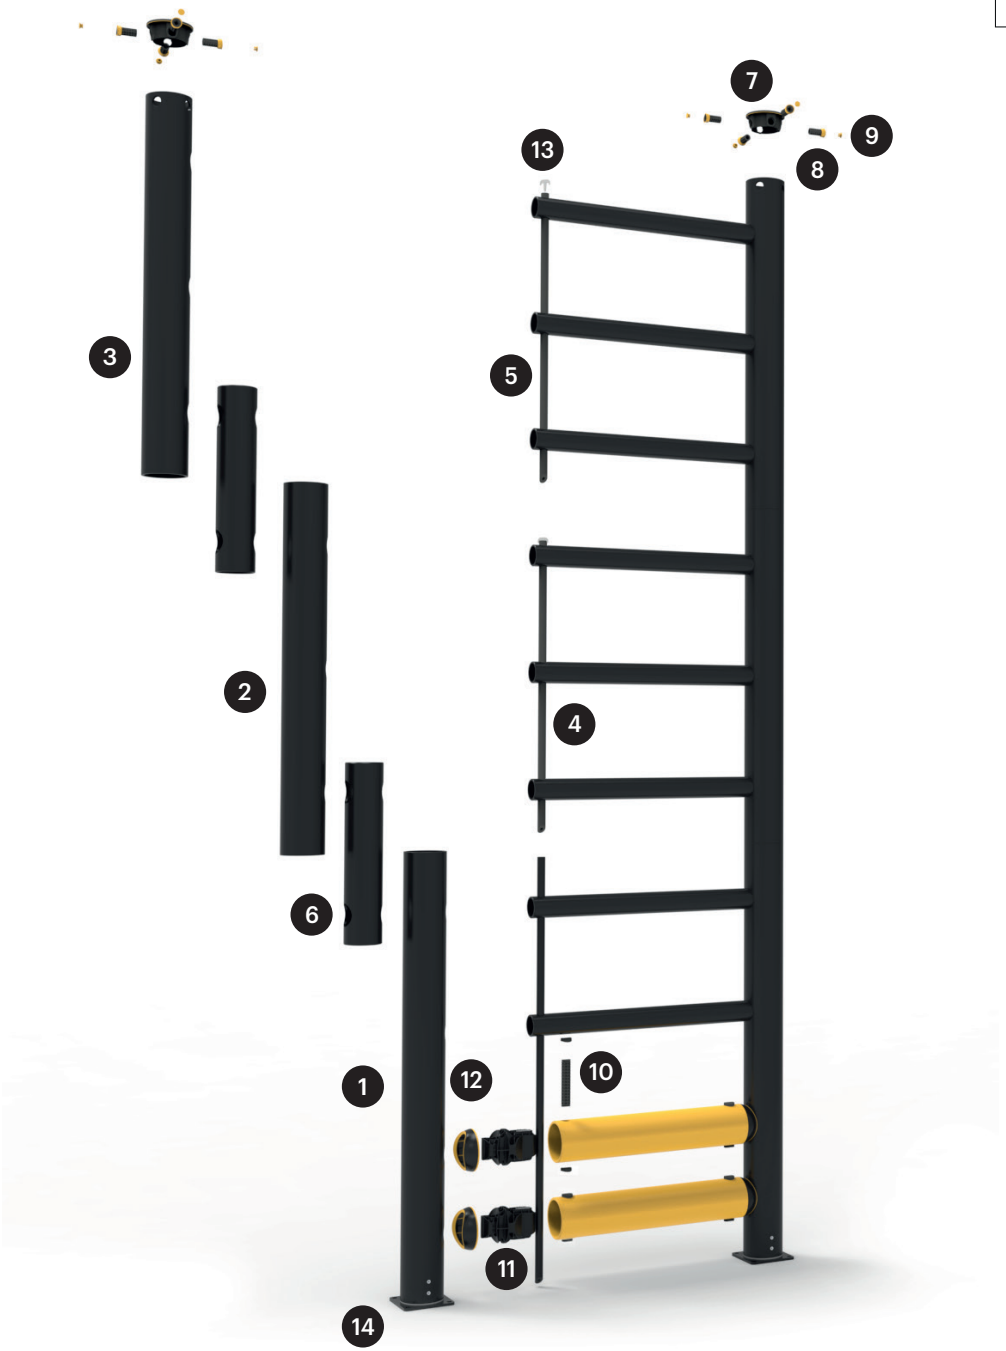

Data Sheets

Testing Videos

CAD

Install Documents

Certificates

If you have any questions please contact
the product management team at A-SAFE HQ
Product.Management@asafe.com

A-SAFE
PIONEERING WORKPLACE SAFETY

PRODUCTHUB

Document Reference	PRH-1019-A-SAFE-15022024-2
Document Description	Haevy Duty Topple Barrier
Date Created	November 2023
Author/s	Matthew Briggs
Checked by	Jerry Budby
Approved by	Ben Allen
Revision	Version 2 - February 2024