A-SAFE

Step Guard

PRH-1020-A-SAFE-15022024-2

Production

Dimensions (mm/inches)

- **A** 600 / 23⅝
  900 / 35⅜
  1200 / 47¼
- **B** 245 / 9⅝
- **C** 185 / 7¼

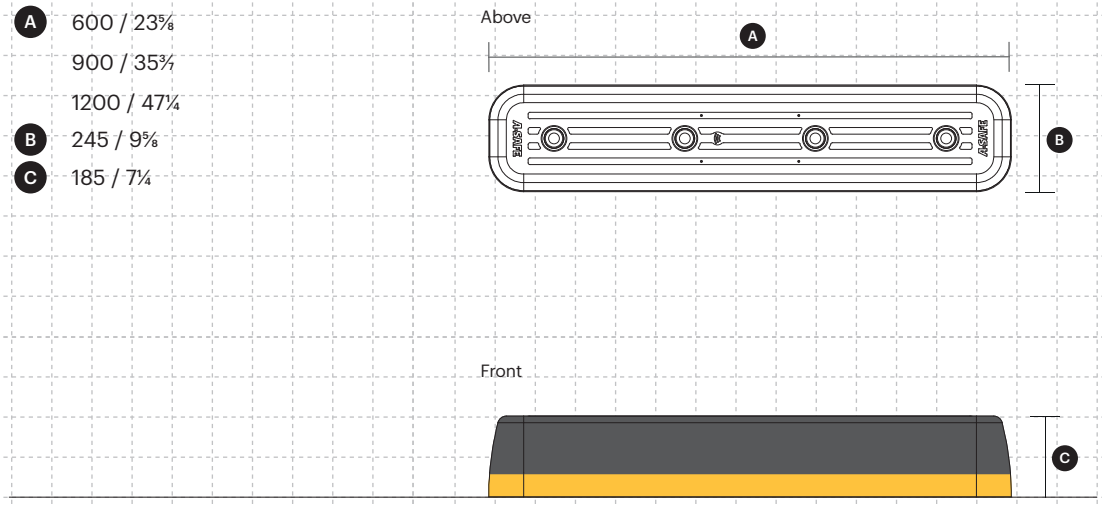

Product Material

MONOPLEX™

Layered engineering
Allows multiple hardness of Monoplex material to be layered to provide flexibility, recovery & impact resistance.

Recovery
Re-positions to natural positions following impact. (timescale dependent on impact force).

Increased performance rating
Products can withstand higher impacts from industrial vehicles.

Eliminates failure points
Removal of steel base plates eliminates historic failure point.

Repeat impacts
Material properties allow for repeat impacts at high impacts.

Fixings
24 OD M16 Anchor Bolt

Colour Combination

Standard



Standard Black
RAL 9005*
PANTONE Black

Standard Yellow
RAL 1007*
PANTONE 7548*

Non-standard

Standard Yellow
RAL 1007*
PANTONE 7548*

Standard Black
RAL 9005*
PANTONE Black

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

Weight of product

Size mm / inches	
600 / 23⅝	10.41 Kg / 22.95 lbs
900 / 35⅜	17.60 Kg / 38.80 lbs
1200 / 47¼	22.74 Kg / 50.13 lbs

Minimum order quantities

Not applicable on this product

Suitability

Environment

Internal use only

ATEX Suitability

Not suitable in an explosive atmosphere

Standard Base and Fixing

600mm	24 OD M16 Anchor Bolt
900mm	
1200mm	

Vehicle Suitability

Manual Pallet Truck	Electric Pedestrian Stacker	Electric Reach Truck	Horizontal Order Picker	Lightweight Counterbalance FLT	VNA	Heavy Duty Counterbalance Truck

Fit for purpose application

Building and equipment protection	Corridor and wall protection	Traffic segregation

Material Properties	MONOPLEX™
Temperature Range	5°C to 40°C
Ignition Temperature	>400 °C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	10^{15} - 10^{16} Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent ** Light stability scale 1 is very poor and 8 is excellent

Fire information

A-SAFE Step Guard is manufactured from an advanced Monoplex material. A material that offers the highest levels of flexibility and resilience without compromising on Fire safety.

Monoplex has an ignition temperature of 400º Celsius which is significantly higher than materials such as wooden pallets or polymers such as flexible PVC. This means that for combustion of an A-SAFE Step Guard to occur, a facility ire would need to be both large and well advanced, by which time any personnel would have already been evacuated to safety.

Impact Zone

0 - 185mm
(0 - 7⅓ inches)

Recycling Information		
Packaging	Step Guard	Fixings
Mixed Recycled	7	Steel

*Fixings

	Item No.	Description	Nom. Drill Hole (W)	Min. Drill Depth	Wrench Size	Torque setting	Qty per Pack	
Step Guard - 600 / 900 / 1200mm	B-02-01-0067	24 OD M16 Anchor Bolt	24mm / 15⁄16″	130mm / 5⅛″	24mm / 15⁄16″AF	150Nm 111ft/ib	600mm	2
							900mm	3
							1200mm	4

Ground Works

Before you install A-SAFE barrier we advise a site survey of the ground intended for the product. This information is crucial as the ground conditions can vastly affect the performance of the safety barrier.

We should always request to see the Operations and Maintenance Manual (OMM) for the building we are installing barrier. This document will give key information such as -

- Depth of concrete slab installed
- Areas where rebar is being used
- Areas where services are located in the building
- Operating temperatures of the facility

If an OMM is not available, we should request to produce an on-site pull-out test. The pull-out test gives us all the information we need to evaluate if an install is possible.

For more information please refer to the Ground Works document in the Product Hub on the A-SAFE SharePoint.

Concrete Pad

18mm hex head
through bolt Z/P

The width of concrete pad is dependent on the width of the Step Guard

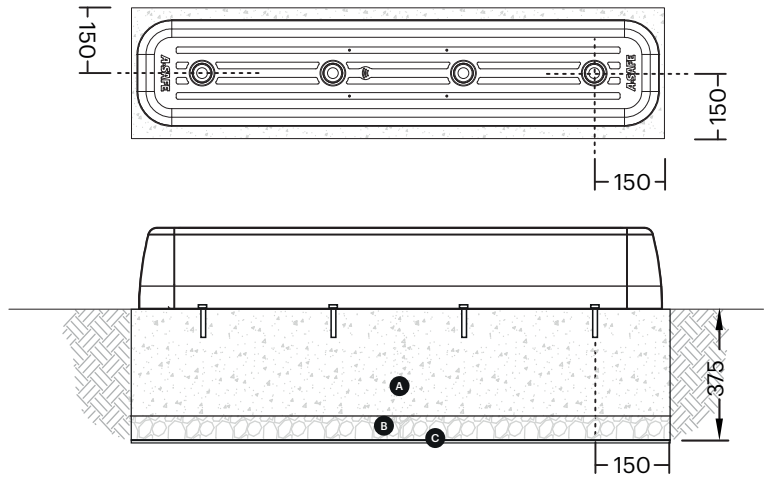

- A Concrete Pad
- B Hardcore
- C Damp Proof Membrane

Dimensions of the concrete pad shown are a minimum size only.

***IMPORTANT.** The fixings data detailed above are based on A-SAFE supplied fixings. If a customer uses their own fixings, they must refer to specific install instructions.

Part Codes

1. N-02-01-0007 - Step Bumper 600mm
2. N-02-01-0006 - Step Bumper 900mm
3. N-02-01-0005 - Step Bumper 1200mm

Fixings -

4. 24 OD M16 Anchor Bolt

Data Sheets

Testing Videos

CAD

Install Documents

Certificates

If you have any questions please contact
the product management team at A-SAFE HQ
Product.Management@asafe.com

A-SAFE
PIONEERING WORKPLACE SAFETY

PRODUCTHUB

Document Reference	PRH-1020-A-SAFE-15022024-2
Document Description	Step Guard
Date Created	November 2023
Author/s	Matthew Briggs
Checked by	Jerry Budby
Approved by	Ben Allen
Revision	Version 2 - February 2024