A-SAFE

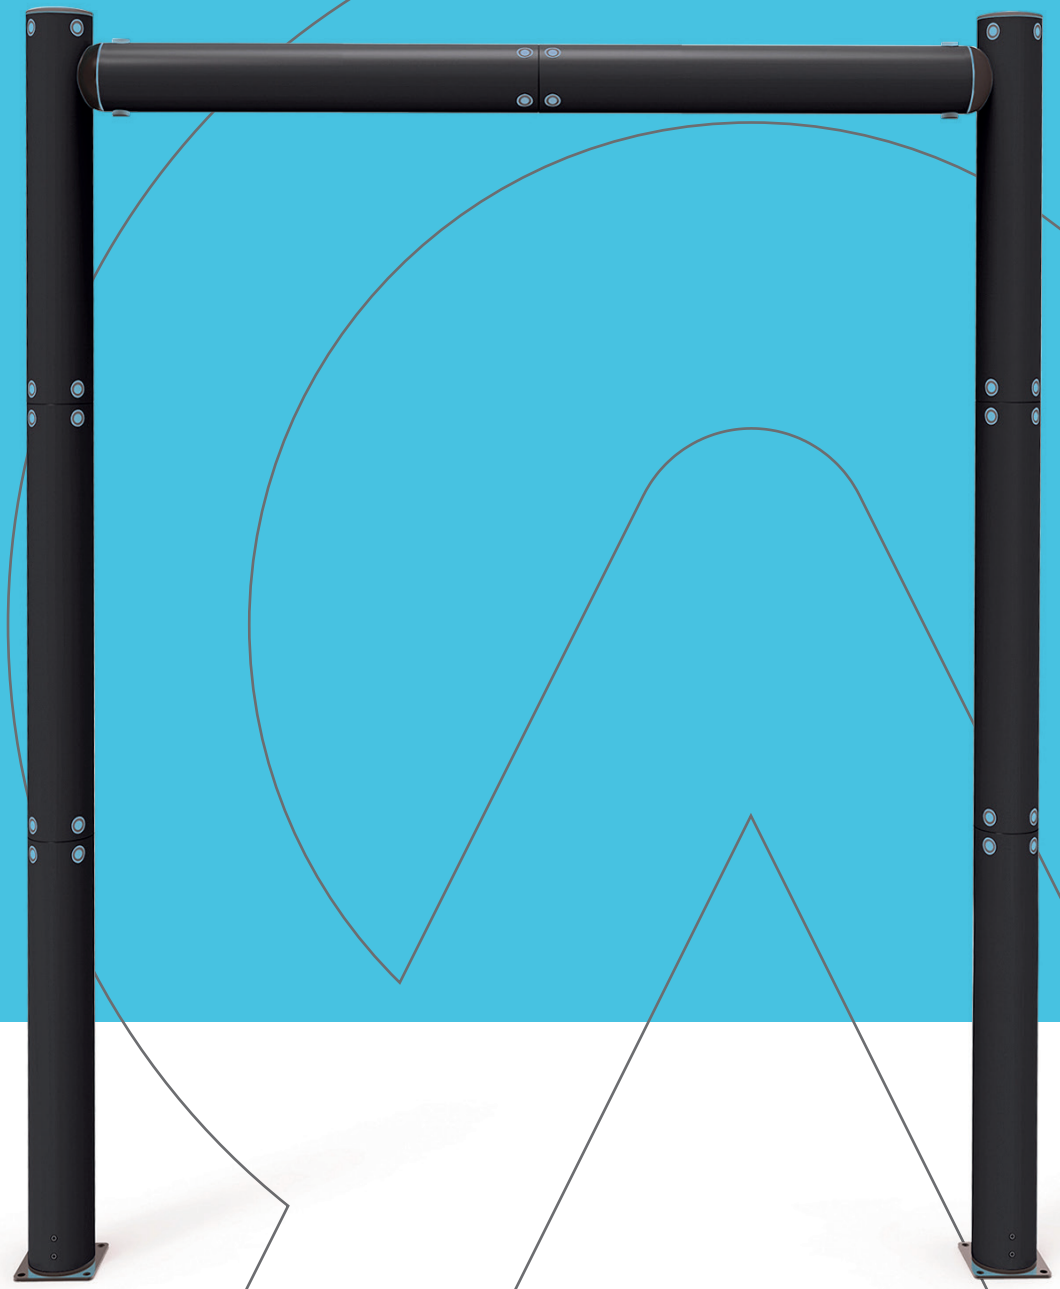

iFlex Cold Storage Height Restrictor

PRH-1063-A-SAFE-15022024-2

Production

Dimensions (mm/inches)

- **A** 230 / 9
- **B** 230 / 9
- **C** 22 / ⅞
- **D** 1200 - 6000 (100 increments)
  47¼ - 236⅜ (4 increments)
- **E** 190 / 7½
- **F** 2000 - 5200 (100 increments)
  78¾ - 196⅞ (4 increments)
  Bespoke arrangements available on request.
- **G** 190 / 7½

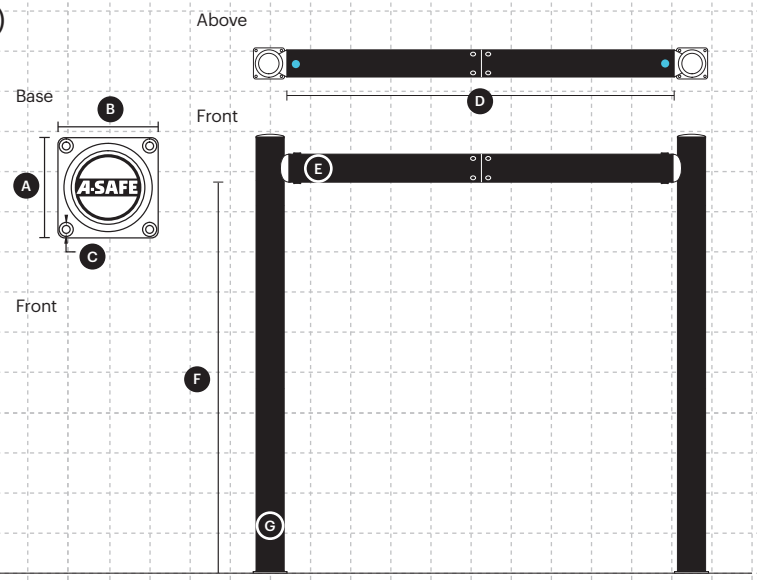

Colour Combination

Standard

Post
Standard Black
RAL 9005*
PANTONE Black

Rail
Black
RAL 9005*
PANTONE Black

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

Product Material

Post and rails

MEMAPLEX™ SUB-ZERO

Ultimate strength polymer created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

Standard base

Zinc nickel, electrophoretic coating

Fixings

Steel

Climate tested
A-SAFE cold storage products are dynamically impact-tested to PAS 13 standards under realistic climate conditions to ensure they perform perfectly everytime.

Weight of product

Posts	
2000 / 78¾	28.40 Kg / 62.61 lbs
3000 / 118⅛	37.20 Kg / 82.00 lbs
4000 / 157½	43.02 Kg / 94.84 lbs
5000 / 196⅞	51.73 Kg / 114.04 lbs

Rails	
Typical Rail Length	Rail Diameter (mm/inches)
	190 / 7½
2500 / 98⅜	19.55 Kg / 43.10 lbs
4500 / 177⅛	36.50 Kg / 80.47 lbs
6000 / 236⅜	45.37 Kg / 100.02 lbs

Minimum order quantities

Not applicable on this product

Suitability

Environment

Internal use only

ATEX Suitability

Not suitable in an explosive atmosphere

Standard Base and Fixing

Zinc nickel, electrophoretic coating

18mm CSK SKT Head Through Bolt, Z/P

Vehicle Suitability

Heavy Duty Counterbalance Truck	High Rack Stacker	Electric Reach Truck

Fit for purpose application

Cold Storage Suitable to -30°C	Building and equipment protection	Industrial door protection

Impact Zone
0 - 1200mm
(0 - 47¼ inches)

Material Properties	MEMAPLEX™ SUB-ZERO
Temperature Range	-30°C to 0°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	10^{15} - 10^{16} Ω
Hygiene Seals	Yes

* Weathering scale 1 is very poor and 5 is excellent ** Light stability scale 1 is very poor and 8 is excellent

Fire information

Manufactured from polypropylene. Polypropylene has an ignition temperature of 370º Celsius which is significantly higher than materials such as wooden pallets or polymers such as flexible PVC. This means that for combustion of an A-SAFE barrier to occur, a facility fire would need to be both large and well advanced, by which time any personnel would have already been evacuated to safety.

Polymer has been engineered to remain stable up to a temperature of 350º Celsius. In contrast, PVC starts breaking down at between 249º Celsius and 273º Celsius, and materials such as wood will burn instantly.

Our material has been specially developed to minimise the release of smoke during combustion. Furthermore, unlike environmentally hazardous polymers like PVC, it does not release harmful dioxins, hydrogen cyanide or hydrogen chloride when burnt.

Environmental information

Research conducted by a leading plastic solutions company* showed that producing one metric tonne of polymer generates less carbon emissions than producing a tonne of steel**. Therefore, from the very outset of raw material production, polymer provides a significant CO_2 saving over steel.

For more information visit A-SAFE.com

* http://www.borealisgroup.com ** www.liloontheweb.org.uk/handbook/carbonfootprint

Recycling Information			
Packaging	Post and Rails	Fixings	Bases
Mixed Recycled	5	Steel	Steel

*Fixings

Fixing Type	Item No.	Description	Nom. Drill Hole (W)	Min. Drill Depth	Wrench Size	Torque Setting	Qty per Pack	Per Post
Standard	B-02-01-0038	18mm Hex Head Through Bolt, Z/P	18mm / 11⁄16"	125mm / 5"	19mm / ¾"AF	80Nm / 60ft/lb	4	1
Countersunk	B-02-01-0041	18mm CSK SKT Head Through Bolt, Z/P	18mm / 11⁄16"	125mm / 5"	10mm / ⅜"AF	80Nm / 60ft/lb	4	1
**Chemical/Resin	B-02-01-0047	Chemical Anchor Stud 16 x190mm z/p	18mm / 11⁄16"	130mm / 5⅛"	24mm / 15⁄16"AF	80Nm / 60ft/lb	1	4
***Removable	B-02-01-0043	Internal-threaded anchor socket M16, Z/P	24mm / 15⁄16"	160mm / 6 5⁄16"	-	80Nm / 60ft/lb	1	4
	B-02-02-0009	M16x40mm Hex Head set screw z/p			24mm / 15⁄16"AF		1	4
	B-02-02-0015	M16 Form A Washer z/p					1	4

Resin Tube	B-02-01-0046	Chemical Resin 380ml tube

** 1no Tube of resin required per 10no fixing bolts *** 1no Tube of resin required for 8no fixings bolts

Ground Works

Before you install A-SAFE barrier we advise a site survey of the ground intended for the product. This information is crucial as the ground conditions can vastly affect the performance of the safety barrier.

We should always request to see the Operations and Maintenance Manual (OMM) for the building we are installing barrier. This document will give key information such as -

- Depth of concrete slab installed
- Areas where rebar is being used
- Areas where services are located in the building
- Operating temperatures of the facility

If an OMM is not available, we should request to produce an on-site pull-out test. The pull-out test gives us all the information we need to evaluate if an install is possible.

For more information please refer to the Ground Works document in the Product Hub on the A-SAFE SharePoint.

Concrete Pad

190mm OD Post
18mm Fixing Bolts
230 x 230mm
Base Plate

- A Concrete Pad
- B Hardcore
- C Damp Proof Membrane

Elevation

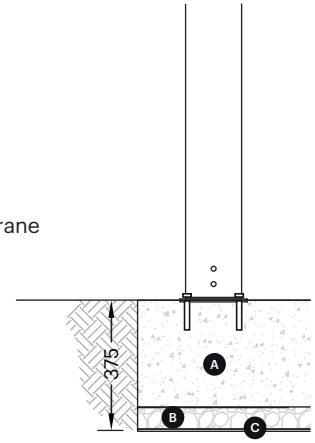

Plan View



Dimensions of the concrete pad shown are a minimum size only.

***IMPORTANT.** The fixings data detailed above are based on A-SAFE supplied fixings. If a customer uses their own fixings, they must refer to specific install instructions.

Part Codes

iFlex Height Restrictor increases in 100mm Increments.
These measurements are:
Height: 2000mm – 5200mm
Width: 1200mm – 6000mm

Section part numbers dependent on total height

1. M-01-01-0059 = Long Lock Pin – 190 x 1 No
2. M-02-01-0005 = Cold Storage Long Lock Pin Cap, Blue x 2 No
3. M-02-01-0004 = Cold Storage 190 Lock Pin, Black and Blue (Top) x 28 No
4. M-02-01-0009 = Cold Storage Pin Plug, Blue x 28 No
5. S-04-02-0001 = Cold Storage Inline Coupling 500mm x 3 No
6. S-04-07-0007 = Cold Storage Height Restrictor 1200mm, Black and Blue x 1 No
7. B-02-01-0038 = 18mm Fixings - R-SPL-II-12125/25L (4pk) x 2 No
8. S-01-02-0042 = 190 Coupling and Sleeve (TPE) x 2 No
9. M-02-01-0001= Cold Storage 190 Single Cap, Black and Blue x 2 No5
10. B-03-02-0108 - Post Pin stop insert
11. M-02-01-0003 - CS 190 Coupling Cover
12. P-01-03-0097 - CS Post Pin 360 OD x 756mm

Data Sheets

Testing Videos

CAD

Install Documents

Certificates

If you have any questions please contact
the product management team at A-SAFE HQ
Product.Management@asafe.com

A-SAFE
PIONEERING WORKPLACE SAFETY

PRODUCTHUB

Document Reference	PRH-1063-A-SAFE-15022024-2
Document Description	iFlex Cold Storage Height Restrictor
Date Created	December 2023
Author/s	Matthew Briggs
Checked by	Alex Dougherty / Nathaniel Hyde
Approved by	Ben Allen
Revision	Version 2 - February 2024