A-SAFE

# mFlex Single Traffic Barrier Ground Level

PRH-1029-A-SAFE-04092024-3

# Production

## Dimensions (mm/inches)

- **A** 150 / 6
- **B** 600-2200 (200 increments)
  23⅝ - 86⅜ (7⅞ increments)
- **C** 100 / 4
- **D** 185 / 7⅓
- **E** 100 / 4
- **F** 130 / 5⅛
- **G** 50 / 2

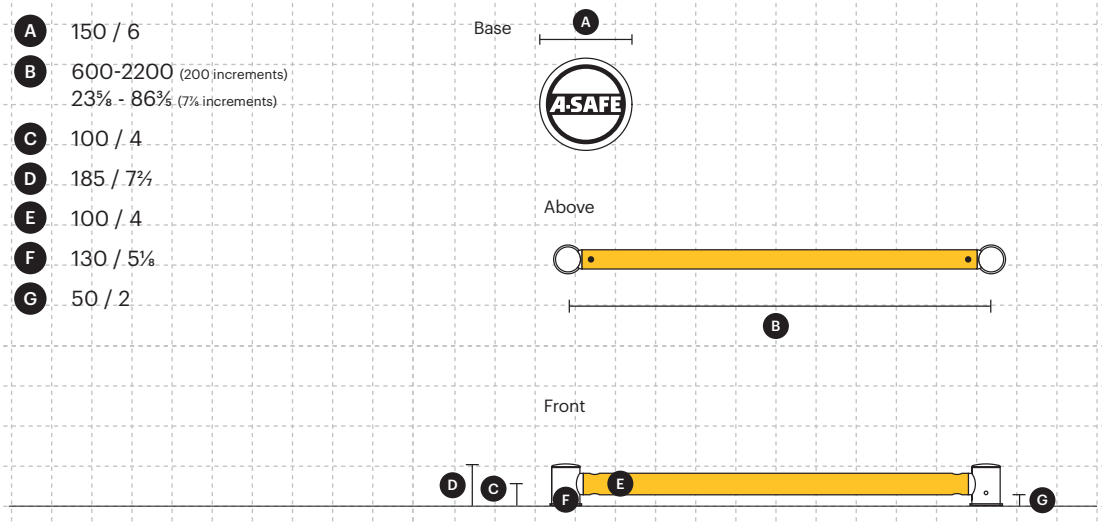


## Colour Combinations

### Standard

**Post**
Standard Black
RAL 9005*
PANTONE Black

**Rail**
Standard Yellow
RAL 1007*
PANTONE 7548*

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

## Product Material

### Post and rails

**MEMAPLEX™**

Ultimate strength polymer created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

Revolutionary 3-Layered Material
- Inner strengthening core
- Central impact absorption zone
- Outer UV stabilised colour layer

### Standard base

Zinc nickel, electrophoretic coating

### Fixings

Steel

## Weight of product

| Posts | |
|---|---|
| End Post | 3.07 Kg / 6.77 lbs |
| Mid Post | 3.54 Kg / 7.80 lbs |

| Rails | |
|---|---|
| Typical Rail Length | Rail Diameter (mm/inches) |
| | 100 / 4 |
| 600 / 23⅝ | 0.85 Kg / 1.87 lbs |
| 1200 / 47¼ | 2.04 Kg / 4.50 lbs |
| 2200 / 86⅜ | 4.01 Kg / 8.84 lbs |

## Minimum order quantities

Not applicable on this product

# Suitability

### Environment

Internal and External use

### ATEX Suitability

Not suitable in an explosive atmosphere

### Standard Base and Fixing

Zinc nickel, electrophoretic coating

**18mm Hex Head** Through Bolt, Z/P

### Vehicle Suitability

| Manual Pallet Truck | Electric Pedestrian Stacker | Frame Rail Container |
|---|---|---|

### Fit for purpose application

| Building and equipment protection | Corridor and wall protection | Column protection | Projects machinery | Airport equipment & baggage conveyor protection |
|---|---|---|---|---|

### Impact Zone

150 - 250mm
(6 - 9⅝ inches)

| Material Properties | MEMAPLEX™ |
|---|---|
| Temperature Range | -10°C to 50°C |
| Ignition Temperature | 370°C to 390°C |
| Flash Point | 350°C to 370°C |
| Toxicity | Not Hazardous |
| Chemical Resistance | Excellent - ISO/TR 10358 |
| Weathering Stability (Grey Scale) | 5/5* |
| Light Stability (Blue Wool Scale) | 7/8** |
| Static Rating (Surface Resistivity) | $10^{15}$ - $10^{16}$ Ω |
| Hygiene Seals | Yes |

* Weathering scale 1 is very poor and 5 is excellent ** Light stability scale 1 is very poor and 8 is excellent

### Fire information

Manufactured from polypropylene. Polypropylene has an ignition temperature of 370º Celsius which is significantly higher than materials such as wooden pallets or polymers such as flexible PVC. This means that for combustion of an A-SAFE barrier to occur, a facility fire would need to be both large and well advanced, by which time any personnel would have already been evacuated to safety.

Polymer has been engineered to remain stable up to a temperature of 350º Celsius. In contrast, PVC starts breaking down at between 249º Celsius and 273º Celsius, and materials such as wood will burn instantly.

Our material has been specially developed to minimise the release of smoke during combustion. Furthermore, unlike environmentally hazardous polymers like PVC, it does not release harmful dioxins, hydrogen cyanide or hydrogen chloride when burnt.

### Environmental information

Research conducted by a leading plastic solutions company* showed that producing one metric tonne of polymer generates less carbon emissions than producing a tonne of steel**. Therefore, from the very outset of raw material production, polymer provides a significant CO2 saving over steel.

For more information visit A-SAFE.com

* http://www.borealisgroup.com ** www.liloontheweb.org.uk/handbook/carbonfootprint

| Recycling Information | | | |
|---|---|---|---|
| Packaging | Post and Rails | Fixings | Bases |
| Mixed Recycled | 5 | Steel | Steel |

# *Fixings

| Item No. | Description | Nom. Drill Hole (W) | Min. Drill Depth | Wrench Size | Torque Setting | Qty per Pack | |
|---|---|---|---|---|---|---|---|
| B-02-01-0053 | 18mm hex head through bolt Z/P | 18mm / 11⁄16″ | 125mm / 5" | 19mm / ¾″ AF | 80Nm / 60ft/lb | 1 per post | 1 per pack |

## Ground Works

Before you install A-SAFE barrier we advise a site survey of the ground intended for the product. This information is crucial as the ground conditions can vastly affect the performance of the safety barrier.

We should always request to see the Operations and Maintenance Manual (OMM) for the building we are installing barrier. This document will give key information such as -

- Depth of concrete slab installed
- Areas where rebar is being used
- Areas where services are located in the building
- Operating temperatures of the facility

If an OMM is not available, we should request to produce an on-site pull-out test. The pull-out test gives us all the information we need to evaluate if an install is possible.

For more information please refer to the Ground Works document in the Product Hub on the A-SAFE SharePoint.

## Concrete Pad

130mm OD Post
18mm through bolt
150 x 150mm Base Plate

- A Concrete Pad
- B Hardcore
- C Damp Proof Membrane

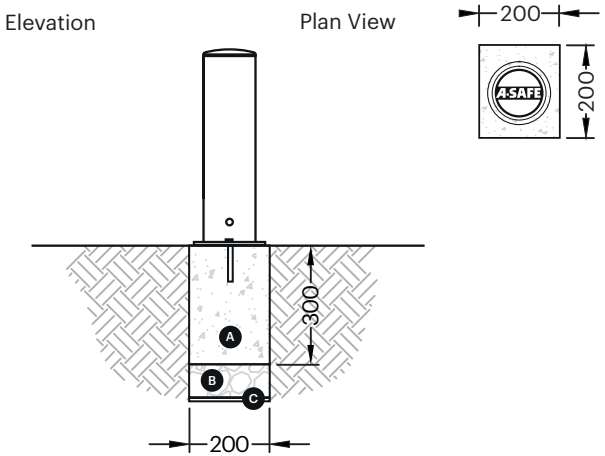


Dimensions of the concrete pad shown are a minimum size only.

***IMPORTANT.** The fixings data detailed above are based on A-SAFE supplied fixings. If a customer uses their own fixings, they must refer to specific install instructions.

# Part Codes

1. M-01-01-0001 = 130 Cap, Black and yellow
2. B-03-02-0019 = Mic LL – Steel Pin Z/P
3. S-01-08-0162 = Mic LL post 1R, Black - End
4. B-02-01-0053 = 18mm Fixing, R-SPL-II-08090/20L x 1 No – Centralised through the base plate
5. M-01-01-0005 = 130 Coupling Cover, Black and Yellow
6. M-01-01-0007 = 130 Coupling, Black
7. M-01-01-0010 = Pin Plug, Yellow x 2 No
8. M-01-01-0009 = 100 Lock Pin, Black and Yellow x 2 No
9. P-01-01-0002 to P-01-01-0016 = Rail 100mm OD, Yellow 600mm to 2000mm – 200mm Increments

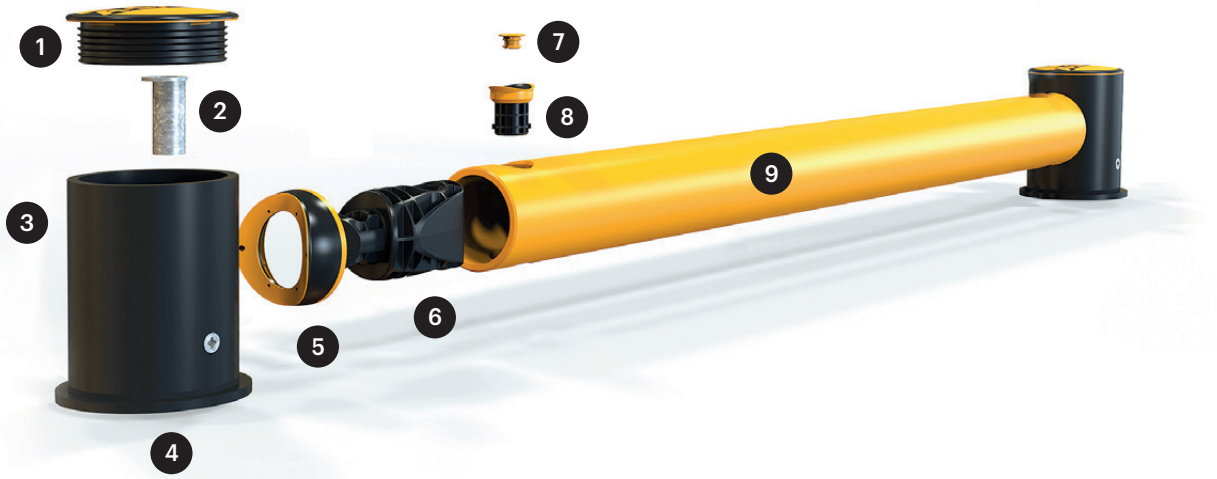

Data Sheets

Testing Videos

CAD

Install Documents

Certificates

If you have any questions please contact
the product management team at A-SAFE HQ
Product.Management@asafe.com

A-SAFE
PIONEERING WORKPLACE SAFETY

PRODUCTHUB

| | |
|---|---|
| Document Reference | PRH-1029-A-SAFE-04092024-3 |
| Document Description | mFlex Single Traffic Barrier Ground Level |
| Date Created | November 2023 |
| Author/s | Matthew Briggs |
| Checked by | Jerry Budby |
| Approved by | Ben Allen |
| Revision | Version 3 - September 2024 |