CONFIDENTIAL

GK & A
Logistics Services LTD

GK & A LOGISTICS SERVICES LTD

EMERGENCY RESPONSE PLAN

Import/Export Terminal, Warehouse, and Reefer Containers

Document No.: ERP-IE-002 | Version: 1.5

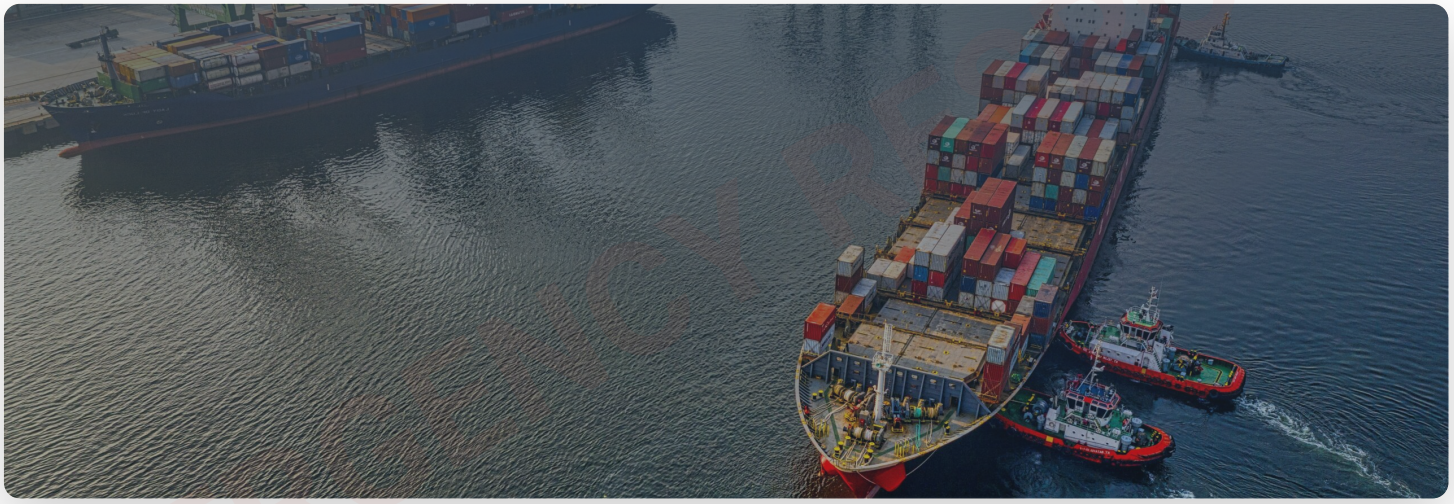

Facility: GK & A Terminal, NPA Lighter Terminal (Ikorodu)
NPA Lighter Terminal Complex, Ipakodo Road, Ipakodo
Ikorodu, Lagos State, 104101, Nigeria

EFFECTIVE DATE
November 1, 2025

REVIEW DATE
October 26, 2026

EMERGENCY CONTACT
Lagos State: Dial 112 or 727

Plan Owner: HSE Manager | Authority: Managing Director
Approval - Distribution: Internal (All Departments), NPA Liaison, Critical Contractors on NDA

© 2025 GK & A Logistics Services Ltd. All rights reserved.

GK & A LOGISTICS SERVICES LTD

EMERGENCY RESPONSE PLAN

Import/Export Terminal, Warehouse, and Reefer Containers at NPA Ikorodu

Document No.: ERP-IE-002

Version: 1.5

Effective Date: November 1, 2025

Review Date: October 26, 2026

Facility: GK & A Terminal, NPA Lighter Terminal (Ikorodu)

NPA Lighter Terminal Complex, Ipakodo Road, Ipakodo

Ikorodu, Lagos State, 104101, Nigeria

This document is controlled and must be reproduced in full.

Any extract or summary must be clearly identified as such.

© 2025 GK & A Logistics Services Ltd. All rights reserved.

Emergency Activation (Lagos State): Dial 112 or 727

Plan Owner: HSE Manager

Authority: Managing Director

- Emergency Response Plan
  - Table of Contents
  - Executive Statement
  - Introduction
  - 1. Purpose
  - 2. Scope
  - 3. Definitions
  - 4. Regulatory and Standards Alignment
  - 5. Risk Profile and Major Accident Hazards (MAH)
  - 6. Governance, Command, and Responsibilities
  - 7. Activation, Notification, and Initial Actions
  - 8. Emergency Response Procedures
  - 9. Evacuation, Shelter-in-Place, Accountability, and Re-entry
  - 10. Communications and Information Management
  - 11. Resources, Equipment, and Maintenance
  - 12. Training, Competency, and Drills
  - 13. Post-Incident Actions and Reporting
  - 14. Financial Provisioning and Insurance
  - 15. Plan Governance, Review, and Distribution
  - 16. Appendices
  - Compliance Statement
  - 90-Day Implementation Roadmap
  - Appendix A — Contact and Notification Matrix (External Authorities and Insurers)
  - Appendix B — Site Plans, Zoning, Evacuation, and Key Locations
  - Appendix C — Emergency Resources Inventory and Maintenance Schedule
  - Appendix D — Training Matrix and Competency Profiles
  - Appendix G — Chemical and Refrigerant Inventory and SDS Index

Emergency Response Plan

FOR GK AND A LOGISTICS SERVICES LTD

Document No.: ERP-IE-002 | Version: 1.5 | Effective Date: November 1, 2025 | Review Date: October 26, 2026

Table of Contents

- Emergency Response Plan
  - Table of Contents
  - Executive Statement

- Introduction
- 1. Purpose
- 2. Scope
- 3. Definitions
- 4. Regulatory and Standards Alignment
- 5. Risk Profile and Major Accident Hazards (MAH)
- 6. Governance, Command, and Responsibilities
  - 6.1 Command and Control
  - 6.2 Roles and Authorities
  - 6.3 Minimum Staffing and Duty Rosters
  - 6.4 Business Continuity Linkage
- 7. Activation, Notification, and Initial Actions
  - 7.1 Triggers
  - 7.2 First Five Minutes (Mandatory)
  - 7.3 First Ten Minutes
  - 7.4 Alerting Systems
- 8. Emergency Response Procedures
  - 8.1 Fire
  - 8.2 Hazardous Spills/HAZMAT
  - 8.3 Refrigerant Leaks (Reefer Stacks)
  - 8.4 Medical Emergencies
  - 8.5 Security Incidents
  - 8.6 Severe Weather and Flooding
  - 8.7 Person Overboard
  - 8.8 Confined Space Incident/Rescue
  - 8.9 Crane/Load Handling Incidents
  - 8.10 Cyber Incident Impacting Safety/Operations
  - 8.11 Utility Loss/Black Start
- 9. Evacuation, Shelter-in-Place, Accountability, and Re-entry
  - 9.1 Evacuation
  - 9.2 Shelter-in-Place
  - 9.3 Accountability
  - 9.4 Re-entry and Re-energization
- 10. Communications and Information Management
  - 10.1 Radio and Channels
  - 10.2 Notifications and Scripts
  - 10.3 Public Information
  - 10.4 Information Governance
  - 10.5 Records Retention

- 11. Resources, Equipment, and Maintenance
  - 11.1 Minimum Critical Inventory
  - 11.2 Maintenance and Assurance
- 12. Training, Competency, and Drills
  - 12.1 Induction (Mandatory for All Before Access)
  - 12.2 Core Training (All Staff)
  - 12.3 Role-Specific Competencies
  - 12.4 Drill Program and Cadence
  - 12.5 KPIs and Records
- 13. Post-Incident Actions and Reporting
  - 13.1 Stabilization and Handover
  - 13.2 Notifications
  - 13.3 Investigation
  - 13.4 Corrective and Preventive Actions (CAPA)
  - 13.5 Environmental Remediation
  - 13.6 Learning and Reporting
- 14. Financial Provisioning and Insurance
- 15. Plan Governance, Review, and Distribution
- 16. Appendices
- Compliance Statement
- 90-Day Implementation Roadmap
- Appendix A — Contact and Notification Matrix (External Authorities and Insurers)
  - A.1 External Authorities (Ikorodu/Lagos)
  - A.2 Insurance and Claims
- Appendix B — Site Plans, Zoning, Evacuation, and Key Locations
  - B.1 Site Identification
  - B.2 Command, Staging, and Media Points
  - B.3 Evacuation Routes and Muster Points
  - B.4 Fire Water Supplies and Critical Utilities
  - B.5 HAZMAT Storage and Environmental Controls
  - B.6 Quay and Water Safety
  - B.7 Prevailing Conditions and Shelter-in-Place
  - B.8 Traffic and Access Control
  - B.9 Map Legend
- Appendix C — Emergency Resources Inventory and Maintenance Schedule
  - C.1 Firefighting Equipment
  - C.2 Spill/HAZMAT Equipment
  - C.3 Detection and Monitoring
  - C.4 Respiratory/Rescue and Water Safety

    - C.5 Medical
    - C.6 Power Continuity
    - C.7 Maintenance and CMMS Controls
  - Appendix D — Training Matrix and Competency Profiles
    - D.1 Roles and Mandatory Competencies
    - D.2 Drill Cadence (Minimum)
    - D.3 Duty Roster Coverage (Minimum)
    - D.4 Records and KPIs
  - Appendix G — Chemical and Refrigerant Inventory and SDS Index
    - G.1 Inventory Fields
    - G.2 Example Entries (Replace with Actuals)
    - G.3 SDS Management
    - G.4 Segregation and Labeling
    - G.5 Environmental Thresholds and Notifications

Executive Statement

Safety, environmental protection, and legal compliance take precedence over production. This Plan is compulsory. Any deviation without prior written approval from the NPA Safety Director and the GK & A Managing Director is a breach subject to disciplinary action, removal from site, and contract termination for cause.

Introduction

This Plan is a jointly endorsed, auditable operational control developed under Nigerian Ports Authority (NPA) oversight. Procedures, notification chains, and role interfaces have been reviewed with NPA and are mandatory for all personnel and contractors on GK & A-controlled areas of the NPA Lighter Terminal, Ikorodu.

Enforcement: Roles and accountabilities are assigned in writing. Compliance is continuously monitored. Violations are escalated through disciplinary protocols and may trigger regulatory reporting to NPA and relevant authorities.

Joint Execution: GK & A and NPA Safety Officers shall co-lead emergency activations, joint drills, audits, debriefs, and corrective actions. NPA retains authority to intervene and direct operations where necessary to protect life, environment, and port security.

---

1. Purpose

This Plan establishes an integrated, zero-harm emergency management framework to:

- Protect people, property, cargo integrity, and the environment.
- Prevent escalation and minimize business interruption.
- Achieve and evidence compliance with: NPA directives; ISPS Code; IMDG Code; ISO 45001 and ISO 14001 principles; ILO/IMO Code of Practice for Safety and Health in Ports; Lagos State and Federal environmental obligations.

- Apply the most stringent requirement when standards overlap.

Measurable Objectives:

- Zero fatalities; zero serious injuries (life-altering).
- External notifications initiated within 5 minutes of emergency declaration.
- Full headcount reconciliation within 10 minutes of evacuation order.
- Drill participation ≥ 90% of on-duty personnel; corrective actions closed ≤ 30 days.
- No uncontrolled discharge to water; all spills contained within the site boundary.

---

2. Scope

Applies 24/7 to GK & A-controlled operations within the NPA Lighter Terminal, Ikorodu:

- Quay, jetties, cargo yards, and operational zones under NPA regulation.
- Warehouses and open storage areas.
- Reefer container stacks, plug-in racks, and associated power/refrigeration systems.

Interfaces and Inclusions:

- Covers all employees, contractors, subcontractors, visitors, clients, and third-party carriers.
- Includes tenants or third parties while in GK & A-controlled zones.
- NPA Safety Officers participate in activations, drills, debriefs, and reviews.

Exclusions:

- Non-GK & A premises beyond defined interface points; however, GK & A shall support NPA-directed mutual aid and information sharing as requested.

---

3. Definitions

- **Emergency**: Unplanned event threatening life, environment, assets, cargo, or operations.
- **Incident Commander (IC)**: On-scene authority responsible for declaring and managing the incident; approves re-entry.
- **Deputy IC**: Authorized alternate who assumes command if needed.
- **Emergency Response Team (ERT)**: Trained responders for Fire, HAZMAT/Spill, Medical, Refrigerant/Technical, Security.
- **Public Information Officer (PIO)**: Sole authorized spokesperson for external communications.
- **Muster Point**: Designated safe assembly location for headcount after evacuation.
- **Exclusion Zone**: Controlled perimeter restricting access to trained, authorized personnel only.
- **ALARP**: As Low As Reasonably Practicable; risk threshold for operations and rescue.

- **Refrigerant**: Substances used in reefers (e.g., A1: R-134a, R-404A, R-452A; A2L where applicable).
- **Shelter-in-place**: Controlled indoor protection procedure during external airborne or security threats.
- **Command Post (CP)**: Primary/secondary locations where IC and key staff coordinate response.
- **Staging Area**: Controlled location where resources and teams assemble before tasking.

---

4. Regulatory and Standards Alignment

This Plan aligns with and references:

- NPA Safety Directives, permits, and port facility requirements.
- ISPS Code and Port Facility Security Plan (PFSP) interfaces.
- IMDG Code; SDS obligations; dangerous goods segregation.
- Lagos State and Federal environmental laws; LASEPA/NESREA notifications.
- ILO/IMO Code of Practice for Safety and Health in Ports.
- LASEMA/NEMA incident coordination guidance.
- Lagos State Safety Commission (LSSC) guidance.
- LASWA/NIWA coordination for waterway/marine incidents.
- Good practice references: NFPA firefighting guidance; EN 378 for refrigerating systems and machinery rooms (where applicable).
- Nigeria Data Protection Act (NDPA) for incident/CCTV data handling.

Where requirements differ, the stricter requirement applies.

---

5. Risk Profile and Major Accident Hazards (MAH)

Top Credible Scenarios:

- Warehouse or reefer-stack fire; electrical cabinet fires; fuel fires.
- Hazardous spills: fuels, oils, chemicals, battery acid.
- Refrigerant releases (A1 asphyxiants; A2L mildly flammable).
- Serious injury/medical emergencies; heat illness.
- Security events: intrusion, theft, bomb/suspicious package, civil disturbance.
- Severe weather: lightning, high winds, flooding, storm surge.
- Person overboard at quay.
- Crane/rigging failure; dropped container; stack collapse; plant rollover.
- Confined space exposure/rescue (sumps, voids, reefer machinery spaces).
- Cyber incident impacting safety systems, reefer monitoring, access control.
- Utility loss/black start; emergency power changeover.

Seasonal Considerations:

- Rainy season flooding risk; pre-season stormwater inspections.
- Heatwaves: work/rest cycles and hydration protocols.

---

6. Governance, Command, and Responsibilities

6.1 Command and Control

- ICS structure: IC; Sections for Operations, Planning, Logistics, Finance/Admin; Safety Officer; PIO; NPA Liaison Officer. Scalable per incident.
- Command Posts: Primary CP [insert location]; Secondary CP [insert location upwind/up-current]; Media Area [insert location].
- Staging Areas: [insert primary/secondary staging points].

6.2 Roles and Authorities

- **Managing Director**: Provides resources; approves ERP revisions; chairs GK & A side of Joint Emergency Steering Committee; authorizes escalations and CAPEX for life-safety.
- **NPA Safety Director**: Co-chairs governance; endorses revisions; ensures NPA alignment.
- **Incident Commander**: Declares emergencies; sets priorities; approves re-entry; orders evacuations and search/rescue; authorizes hot work post-incident via permit.
- **Deputy IC**: Ensures continuity of command; assumes IC role if needed.
- **NPA Liaison Officer**: Coordinates NPA Port Control, Port Police, Marine units; ensures statutory notifications to agencies.
- **ERT Leaders (Fire, HAZMAT, Medical, Security, Technical)**: Task, supervise, and account for teams; ensure PPE and gas monitoring are used; report status to IC.
- **Warehouse Controller**: Executes emergency shutdown; secures hazardous storage; supports accountability.
- **Reefer Maintenance Lead**: Manages reefer power isolation/restore; engages certified refrigeration contractors; safeguards temperature-critical cargo.
- **Security Supervisor**: Establishes perimeters; manages access control and gate protocols; preserves evidence; liaises with NPA Port Police.
- **PIO**: Controls public/media/customer messaging; issues holding statements; maintains rumor control; ensures social media policy enforcement.
- **All Personnel/Contractors**: Raise alarms; stop work; evacuate; follow IC/ERT instructions; participate in drills; support headcounts. Non-compliance results in removal and disciplinary action.

6.3 Minimum Staffing and Duty Rosters

- On-shift minimum ERT presence (24/7): Fire 3; HAZMAT 2; Medical 2; Security 2; Technical 1; IC/Deputy IC accessible within 10 minutes. Documented duty roster by week.
- Competency currency: All on-shift ERT members shall be current on SCBA and gas monitoring within 12 months; first aiders with AED competency within 24 months.

6.4 Business Continuity Linkage

- Tie-in to GK & A Business Continuity Plan (BCP): reefer continuity, alternate cold storage, mutual aid for reefer power, client comms during prolonged outages.

---

7. Activation, Notification, and Initial Actions

7.1 Triggers

- Fire/explosion/smoke alarm; chemical or fuel spill; refrigerant alarm/odor; serious injury; security incident; severe weather/flooding/lightning; structural compromise; person overboard; extensive power loss affecting reefers.

7.2 First Five Minutes (Mandatory)

- Raise alarm: pull station or radio in clear text “EMERGENCY – [Location] – [Type].”
- IC or senior-most present declares emergency; stands up Command Post; assigns scribe; opens Incident Log with time-stamps.
- Dispatch ERT; confirm PPE (SCBA for unknown atmospheres).
- Notify NPA Port Control immediately; escalate to Fire/EMS/Police/LASEMA/LASWA/NIWA as needed per matrix.
- Lock down or open gates as appropriate to incident type to secure site or facilitate emergency ingress.

7.3 First Ten Minutes

- Order evacuation or shelter-in-place as conditions dictate.
- Establish exclusion zones; deny entry.
- Achieve full headcount reconciliation at muster points within 10 minutes; identify missing persons; do not start rescue unless risk is ALARP and approved by IC.
- Issue SITREP 1 to leadership and NPA.

7.4 Alerting Systems

- Site sirens/PA; UHF radios (Channels: 1 Ops, 2 ERT, 3 Command); SMS/app alerts. Backups: air horns, runners.

---

8. Emergency Response Procedures

General Priorities: Protect life; isolate hazards; prevent escalation; protect environment; preserve evidence.

8.1 Fire

- PPE: Full structural gear and SCBA for interior/close approach.
- Electrical/reefer fires: Isolate power first if safe; use CO2/DCP; avoid water on live components.
- Flammable liquid fires: Apply foam; protect drains; deploy booms to capture runoff; avoid fluorinated foams unless no alternative; prefer fluorine-free foam (F3).
- Warehouse/stack fires: Establish 360° size-up; protect exposures; set collapse zones; use TIC to confirm knockdown; ventilate cautiously to prevent flashover; compartment doors stay closed until cooled and monitored.
- Post-fire: Fire watch 60 minutes minimum; water/runoff containment and sampling; document all actions and foam use.

8.2 Hazardous Spills/HAZMAT

- Approach upwind/upstream; identify via SDS/IMDG; don chemical-resistant PPE; consider SCBA for unknown/toxic atmospheres.
- Control: Stop the source; isolate ignition sources; ground/bond for flammables; deploy drain covers, booms, absorbents, temporary bunds; protect watercourses.
- Collection: Overpack drums, labeled containers; segregate waste; store in designated HAZMAT area for licensed disposal.
- Notifications: NPA Port Control; LASEPA/NESREA where thresholds met; record volumes and materials.
- Decontamination: Establish gross decon for responders/casualties when required before EMS handover.

8.3 Refrigerant Leaks (Reefer Stacks)

Hazards: A1—oxygen displacement; cold burns. A2L—mild flammability; ignition risk; decomposition products if heated.

Immediate Controls: - Evacuate immediate area; mark no-ignition zone. - Minimum cordon: 50 m if concentration and wind unknown; adjust based on readings. - Prohibit hot work; isolate electrical power to affected unit(s).

Monitoring: - Use calibrated refrigerant leak detector (NDIR/IR for halocarbons) plus multi-gas meter. - Alarm set-points: warn at 10% LFL for A2L; evacuate/cordon at ≥20–25% LFL; manage A1 as asphyxiant—use SDS OEL (often ~1,000 ppm TWA; confirm per SDS).

Response: - Ventilate naturally or mechanically; ensure continuous ventilation in reefer alleys; interlock hot work shutdown where fixed detection exists. - Only qualified technicians to isolate/repair; recover refrigerant to approved cylinders; record loss and service details.

Re-occupy Only When: - O2 19.5–23.5%; LEL < 10%; refrigerant below OEL per SDS; two consecutive stable readings 5–10 minutes apart.

8.4 Medical Emergencies

- Scene safety; announce “Medical Emergency – General Hospital Ikorodu”; deploy AED/trauma kit.
- DRSABC; control bleeding; burns: cool with clean water (≥20 minutes); chemical exposures: flush ≥15 minutes and consult SDS.
- Heat stress: remove from heat, active cooling, hydration, monitor vitals.
- Coordinate LASAMBUS/112/767; guide ambulance through designated gate; ensure casualty/witness logs; decon equipment after use.

8.5 Security Incidents

- Lockdown/access control per PFSP; badge deactivation if required; ensure CCTV preservation and evidence handling.
- Bomb/suspicious package: follow checklist; evacuate upwind; avoid radios within 15 m of suspect device.
- Intrusion/theft: do not pursue; preserve scene; notify NPA Port Police.
- Civil disturbance/armed threat: shelter-in-place; safe room protocols; code words for silent alerts; comply with law enforcement.

- PIO manages all external comms; staff prohibited from social media posting.

8.6 Severe Weather and Flooding

Monitoring: lightning alerts; wind thresholds; tidal/surge data.

Actions: - Secure loose cargo/equipment; suspend high-risk work; cease crane operations above defined wind speeds. - Elevate vulnerable goods; protect critical records; shut non-essential power. - Activate stormwater controls; deploy sandbags/booms; isolate drains (where valved).

Reefer Continuity: Transfer to emergency power per prioritization matrix; manual temp checks/logs during outages.

Post-Event: Structural/electrical/environmental inspections; document findings and corrective actions.

8.7 Person Overboard

- Shout “Man Overboard”; maintain constant visual; point at casualty.
- Throw lifebuoy with light/line; deploy additional flotation and throw-bags.
- Halt nearby craft unless directed; notify NPA Marine/Police; launch designated rescue craft if safe; approach leeward; avoid crush points.
- Recovery: Treat for hypothermia/aspiration; call ambulance; preserve evidence; debrief.

8.8 Confined Space Incident/Rescue

- Do not enter without permit and rescue plan; perform atmospheric testing; continuous monitoring.
- Rescue only by trained team with retrieval systems and standby; use SCBA or supplied air as required; keep entry/exit logs.

8.9 Crane/Load Handling Incidents

- Establish collapse zone; isolate area; confirm structural stability.
- Do not move load until assessed; engage specialist recovery; investigate rigging failure; preserve lifting gear as evidence.

8.10 Cyber Incident Impacting Safety/Operations

- Activate incident response; isolate affected networks; move to manual controls for safety-critical systems (reefer monitoring, access control) per BCP; maintain paper logs; notify leadership and NPA if port operations affected.

8.11 Utility Loss/Black Start

- Black start checklist: verify generator readiness; initiate ATS/manual transfer; confirm priority loads (reefer racks, control room, lighting, comms); load shed per matrix; verify fuel autonomy and quality (water-in-fuel test); document times and loads.

---

9. Evacuation, Shelter-in-Place, Accountability, and Re-entry

9.1 Evacuation

Triggers: Fire; HAZMAT/refrigerant; structural threat; person overboard in proximity; security per IC; severe weather.

Routes and Muster Points: Use primary/secondary routes to four muster points located upwind/up-current and away from reefer banks and HAZMAT stores; maps in Appendix B; muster capacity limits posted.

Assisted Evacuation: Buddy system; evacuation chairs where needed; Wardens/Marshals sweep zones, stairwells, amenities.

Vehicles: Do not use unless directed for controlled egress or to clear critical paths.

9.2 Shelter-in-Place

Trigger: External toxic plume; civil disturbance/armed threat; lightning with no safe egress.

Actions: Move indoors; close doors/windows; switch off ventilation; seal gaps; stay tuned to Channel 3; await all-clear.

9.3 Accountability

- Headcount completed within 10 minutes using T-cards, access logs, visitor registers, PTW lists; report missing persons with last known location; IC approves search-and-rescue only when risk is ALARP.

9.4 Re-entry and Re-energization

IC grants re-entry with NPA concurrence after:

- Atmosphere safe: O2 19.5–23.5%; LEL < 10%; CO < 25 ppm; H2S/other toxics below OEL per SDS; refrigerant below OEL per SDS; two consecutive stable readings 5–10 minutes apart.
- No visible smoke/heat; structural integrity confirmed; utilities safe; spills neutralized/contained; drains protected.

Phased Re-entry: Essential personnel first; full re-energization via permit-to-work and hot work permits as applicable.

Post Re-entry: 60-minute fire watch and status update to all staff/clients as needed.

---

10. Communications and Information Management

10.1 Radio and Channels

- Plain language; call signs; Channels: 1 Operations; 2 ERT; 3 Command. Minimize non-essential traffic. Radio fallback: spare radios, charged batteries, cellular PTT if available.

10.2 Notifications and Scripts

- IC or delegate notifies NPA Port Control; Lagos State Fire and Rescue; LASEMA/NEMA; LASAMBUS (112/767); Nigeria Police (including Marine); LASEPA/NESREA; LASWA/NIWA; power utility; mutual aid.

- Use standard PA/holding statements (Appendix F).

10.3 Public Information

- Only PIO communicates externally; all statements approved; social media posting by staff prohibited.

10.4 Information Governance

- Incident Log and Situation Reports (SITREPs) maintained; evidence preserved (CCTV, photos, samples) with chain-of-custody.
- Data protection: Handle personal data and CCTV per NDPA; restrict access; define retention and deletion for non-incident footage.

10.5 Records Retention

- Minimum five years for incident records, training, detector calibrations, environmental manifests; longer if required by regulator/insurer.

---

11. Resources, Equipment, and Maintenance

11.1 Minimum Critical Inventory

Firefighting: - DCP/CO2/foam extinguishers by hazard class; hydrants/hose reels; fire pumps; foam trailer (F3 preferred); thermal imaging cameras.

HAZMAT: - Spill kits (oil/chemical/universal), drain covers, absorbent booms, overpack drums, neutralizers.

Detection: - Portable multi-gas meters (O2, LEL, CO, H2S), refrigerant detectors compatible with installed gases; fixed detection where installed.

Respiratory/Rescue: - SCBA sets with spare cylinders; escape hoods; lifebuoys with lights/lines every 25–50 m; throw-bags; quay ladders; rescue boat readiness.

Medical: - First-aid kits, trauma kits, AEDs, stretchers/spine boards, eyewash/shower stations.

Power: - Emergency generators with ATS prioritizing reefer circuits, control room, lighting, comms; fuel autonomy ≥ 48 hours; critical spares (ATS controller, breakers, reefer plugs/connectors).

11.2 Maintenance and Assurance

- CMMS-driven inspections; monthly visual checks; quarterly functional tests; detector bump tests per shift use and calibration per manufacturer; SCBA flow tests; AED pads/battery within expiry; hydrant/flow tests; generator monthly load tests; quarterly full-load bank tests.
- Color-tag system: in service/out of service; only authorized technicians may tag equipment; immediate notification to IC/HSE when life-safety equipment is OOS; rectify within defined SLA.
- Third-party service contracts for pumps, detectors, SCBA, AEDs, generators, reefer systems. Certificates retained.

---

12. Training, Competency, and Drills

12.1 Induction (Mandatory for All Before Access)

- Site hazards; alarms; muster points; stop-work authority; incident reporting; PPE; PTW; social media restrictions.

12.2 Core Training (All Staff)

- Fire extinguisher; spill awareness; first-aid awareness; security awareness; emergency comms; shelter-in-place.

12.3 Role-Specific Competencies

ERT: - Advanced firefighting; HAZMAT spill control; SCBA; confined space awareness; water rescue elements; incident command (ICS 100/200); ICS 300 for IC/Deputy; refrigerated cargo hazards.

Operators: - Forklift/crane; banksman/signaller; load securement; work at height; LOTO.

Technicians: - Refrigerant safety incl. A2L awareness; electrical safety; arc-flash awareness; hot work permit; LOTO.

Wardens/Marshals: - Evacuation leadership; headcount procedures; crowd management; assisted evacuation.

PIO/Comms: - Crisis comms; media handling; message maps; rumor control.

12.4 Drill Program and Cadence

- Quarterly site-wide evacuations (include a night-shift and a no-notice drill annually).
- Semi-annual HAZMAT and refrigerant-leak drills (at least one A2L scenario).
- Annual multi-agency full-scale exercise with NPA and emergency services (include water rescue).
- Quarterly table-top exercises for leadership/supervisors with injects (power loss + refrigerant + medical).

12.5 KPIs and Records

- Headcount within 10 minutes; response-to-containment times met; ≥ 90% on-duty participation; corrective actions closed ≤ 30 days; requalification before expiry. Training matrix and certificates maintained.

---

13. Post-Incident Actions and Reporting

13.1 Stabilization and Handover

- Confirm scene safety; maintain command until formal transfer to authorities; document handover times and accepting authority.

13.2 Notifications

- Immediate to NPA; environmental releases to LASEPA/NESREA within prescribed periods; insurers within policy terms; clients per contract/PIO guidance.

13.3 Investigation

- Lead Investigator appointed by HSE Manager; methods: 5 Whys, bow-tie, fault tree; preserve evidence with chain-of-custody; interviews documented; timeline reconstructed via CCTV/access logs.

13.4 Corrective and Preventive Actions (CAPA)

- Assign owners and due dates; verify effectiveness; include in management review; update ERP/SOPs within 30 days where required; raise MOC for systemic changes.

13.5 Environmental Remediation

- Sampling/monitoring; regulator engagement; licensed waste contractors with manifests retained.

13.6 Learning and Reporting

- Final incident report; regulatory submissions; insurer loss pack; client reports; lessons shared via safety alerts/toolbox talks.

---

14. Financial Provisioning and Insurance

- Emergency funding: pre-approved thresholds for rapid procurement and contractor call-outs; emergency vendor list activated by IC/Procurement.
- Insurance: property damage/BI; machinery breakdown (generators/reefer electrical); terminal operators liability/bailee's liability; employers' liability/ workers' compensation; public liability; environmental impairment/pollution liability; marine cargo as applicable.
- Claims management: immediate loss notice; mitigation; evidence preservation; adjuster coordination; cost tracking; salvage/repair decisions; claims coordinator designated.

---

15. Plan Governance, Review, and Distribution

- Ownership/approval: Plan Owner HSE Manager; approval by Managing Director; NPA Safety concurrence recorded.
- Review cycle: annual or after major incident, regulatory change, significant exercise findings, or material facility/process change.
- Document control: versioning; revision log; change summaries and approvers; controlled copies in Control Room, Security Gatehouse, ERT lockers; digital repository access-controlled.
- Assurance: internal audits and joint NPA reviews; KPI dashboard to leadership; actions tracked to closure.
- MOC: required for any change affecting layout, risks, alarms, egress, utilities, or emergency power priorities; training and communication delivered before change goes live.

---

16. Appendices

A. Contact and Notification Matrix (internal, regulators, emergency services, mutual aid, utilities, insurers; time limits and scripts)

B. Site Plans, Zoning, Evacuation Routes, Muster Points; hydrants, shut-offs, reefer plug racks; Command Post and Staging; Media Area

C. Emergency Resources Inventory and Maintenance Schedule (minimum quantities; inspection/calibration/test cadences; tagging rules)

D. Training Matrix and Role Competency Profiles (currency/recert intervals; duty roster coverage)

E. Checklists and Forms (activation; size-up; headcount; search-and-rescue authorization; re-entry; hot work and gas test; SITREP; investigation; CAPA; decon; bomb threat)

F. Standard PA Scripts, Alarm Tones, and Media Holding Statements (fire, spill, medical, severe weather, security lockdown, reefer service interruption)

G. Chemical/Refrigerant Inventory and SDS Index (OELs, LFLs, detector compatibility)

H. Regulatory/Standards Reference List and Compliance Mapping (NPA, ISPS, IMDG, LASEPA/NESREA, LSSC, LASWA/NIWA, EN 378, NFPA)

I. Insurance Certificates and Broker/Insurer Contacts (notification windows, claim pack contents)

J. Mutual-Aid Agreements/MoUs and Service SLAs (refrigeration contractors, spill response, fuel supply, heavy lift/crane recovery)

K. Glossary and Acronyms

L. Records Retention Schedule (including NDPA data governance)

Compliance Statement

Compliance with this Plan is compulsory and jointly enforced by GK & A and NPA. All personnel, contractors, and visitors are bound by these requirements. Any deviation, delay, or shortcut is a breach of GK & A and NPA mandates and will trigger immediate corrective measures and disciplinary action, up to removal from site and contract termination for cause. Continuous readiness, rapid notification, disciplined execution, and complete documentation are non-negotiable.

90-Day Implementation Roadmap

- Populate Appendices A–G with site-specific names, 24/7 numbers, maps, inventories, and forms.
- Confirm Command Post, Staging, and Media Areas on plans; post evacuation maps in English and Yoruba; show prevailing wind/tidal directions.
- Verify siren/PA coverage; prepare backup alert kits (air horns, runners).
- Inventory and close gaps on critical equipment (SCBA, detectors, spill kits, foam F3, life rings/throw-bags, AEDs, reefer plugs/spares).
- Calibrate/bump-test detectors; label due dates; stock calibration gases.
- Finalize duty rosters; minimum on-shift ERT coverage; publish escalation tree.
- Test ATS, black start, and 48-hour fuel autonomy; define load-shedding and reefer prioritization matrix.
- Execute a tabletop within 30 days (scenario: refrigerant leak + concurrent medical); conduct a night-shift evacuation drill within 60 days; schedule a full-

scale multi-agency drill within 90 days (include water rescue and reefer incident).

- Issue social media restrictions reminder; brief PIO and Client Relations on scripts.
- Launch CAPA tracker; report progress monthly to the Joint Emergency Steering Committee.

Appendix A — Contact and Notification Matrix (External Authorities and Insurers)

A.1 External Authorities (Ikorodu/Lagos)

NPA Port Control (Ikorodu) - Phone: +234 901 222 3101 - Email: ikorodu.portcontrol@nigerianports.gov.ng (verify with NPA Liaison)

NPA Port Police (Ikorodu) - Phone: +234 902 222 3102 - Email: portpolice.ikorodu@nigerianports.gov.ng (verify with NPA Liaison)

Nigeria Police Marine/Water Unit - Phone: +234 903 222 3103 - Email: info@npf.gov.ng (use phone for activation; email for follow-up)

Lagos State Fire and Rescue Service - Phone: +234 904 222 3104 - Email: info@lsfrs.lagosstate.gov.ng (verify current address; activation via 112/727 only)

LASAMBUS/Ambulance (Lagos) - Phone: +234 905 222 3105 - Email: info@health.lagosstate.gov.ng (use 112/727 for activation; email for admin follow-up)

LASEMA (Emergency Management Agency) - Phone: +234 906 222 3106 - Email: info@lasema.lagosstate.gov.ng

NEMA (Federal) - Phone: +234 907 222 3107 - Email: info@nema.gov.ng

LASEPA (Environmental Protection Agency) - Phone: +234 908 222 3108 - Email: info@lasepa.lagosstate.gov.ng

NESREA (Federal Environmental Regulator) - Phone: +234 909 222 3109 - Email: info@nesrea.gov.ng

LASWA (Waterways Authority) - Phone: +234 910 222 3110 - Email: info@laswa.lagosstate.gov.ng

NIWA (National Inland Waterways Authority) - Phone: +234 911 222 3111 - Email: info@niwa.gov.ng

Power utility control room (Ikorodu area – likely Ikeja Electric) - Phone: +234 912 222 3112 - Email: customercare@ikejaelectric.com (verify service coverage for your feeders)

Mutual Aid — Ikorodu Jetty Operators Association - Phone: +234 913 222 3113 - Email: admin@ijoa.org.ng (verify)

Marine Tug/Rescue — Ikorodu Marine Services - Phone: +234 914 222 3114 - Email: ops@ikorodumarine.com.ng (verify)

Industrial Fire Support (Regional) - Phone: +234 915 222 3115 - Email: duty@regionalfiresupport.com.ng (verify)

A.2 Insurance and Claims

Broker — NaijaRisk Brokers (Primary) - Phone: +234 701 444 5101 - Email: service@naijariskbrokers.com.ng (verify)

Broker — NaijaRisk Brokers (Backup) - Phone: +234 702 444 5102 - Email: claims@naijariskbrokers.com.ng (verify)

Property/Business Interruption — Guardian Assurance - Phone: +234 703 444 5103 - Policy: TBD-PA-2025-001 - Email: claims@guardianassurance.com.ng (verify)

Machinery Breakdown — Atlas Engineering Ins. - Phone: +234 704 444 5104 - Policy: TBD-MB-2025-002 - Email: claims@atlasengineeringins.com.ng (verify)

Terminal Operators/Bailee's Liability — Coastal Liability Ins. - Phone: +234 705 444 5105 - Policy: TBD-TL-2025-003 - Email: claims@coastalliability.com.ng (verify)

Employers' Liability/Workers' Comp — Safeguard Ins. - Phone: +234 706 444 5106 - Policy: TBD-EL-2025-004 - Email: claims@safeguardins.com.ng (verify)

Public Liability — Guardian Assurance - Phone: +234 707 444 5107 - Policy: TBD-PL-2025-005 - Email: liability@guardianassurance.com.ng (verify)

Environmental Impairment/Pollution — GreenShield Ins. - Phone: +234 708 444 5108 - Policy: TBD-EP-2025-006 - Email: envclaims@greenshieldins.com.ng (verify)

Marine Cargo (if applicable) — OceanCover - Phone: +234 709 444 5109 - Policy: TBD-MC-2025-007 - Email: claims@oceancover.com.ng (verify)

Appendix B — Site Plans, Zoning, Evacuation, and Key Locations

B.1 Site Identification

- **Facility**: GK & A Terminal, NPA Lighter Terminal (Ikorodu)
- **Address**: NPA Lighter Terminal Complex, Ipakodo Road, Ipakodo, Ikorodu, Lagos State, 104101, Nigeria
- **Main Gate GPS (primary access)**: 6.5990068, 3.4814838
- **Emergency activation**: Dial 112 or 727
- **Site emergency email**: info@gkaport.com

B.2 Command, Staging, and Media Points

Primary Command Post (CP): Terminal Control Room, Admin Block Level 1 - Reference: Admin Block near Main Gate at 6.5990068, 3.4814838 - Features: Hard-wired power/UPS; dedicated radios/spares; wall site plan; Incident Log kit; gas monitor cache.

Secondary CP: Security Gatehouse (co-located at Main Gate) - Reference: 6.5990068, 3.4814838 - Features: Redundant radios; CCTV access; duplicate muster board; basic logs.

Staging Area S1: Yard staging bay north of Warehouse 1 - Reference: Signed "S1—Staging"; cones and signage stored at Gatehouse.

Media Area: Visitor car park outside the operations fence near Main Gate - Reference: Signed “Media Area—PIO Control Only”; segregated from muster points.

B.3 Evacuation Routes and Muster Points

Primary Routes: From warehouses and reefer alleys to North Car Park and West Laydown via signed paths; avoid reefer stacks and HAZMAT stores.

Secondary Routes: Southern and eastern egress to South Green Space and East Open Ground.

Muster Points: - **A**: North Car Park (capacity 120): Paved car park north of Admin Block; headcount board and trauma kit at post “A.” - **B**: West Laydown Yard (capacity 120): Western perimeter open laydown; cones/signage installed. - **C**: South Green Space (capacity 150): Graveled/grass verge south of Warehouse 1; away from drains and fuel points. - **D**: East Open Ground (capacity 150): Hardstand east of Reefer Racks; outside any HAZMAT cordon.

Accessibility: Evacuation chairs at Admin Block stairwell and Warehouse 1 mezzanine; wardens sweep amenities/stairwells before leaving.

Signage: Bilingual English/Yoruba; reflective; “Avoid Reefer Stacks” icons.

B.4 Fire Water Supplies and Critical Utilities

Hydrants/Monitors (match on-site tags): - H1 Quay NW; H2 Quay mid-berth; H3 Quay SE; H4 Perimeter west curve; H5 W1 north wall; H6 W1 south wall; H7 Admin frontage; H8 Fuel point bund (outside); H9 Reefer aisle; H10 Yard east perimeter. - Fixed monitors: M1 Quay NW; M2 Quay SE.

Fire Pump Room(s): - PR-1: Annex south of Warehouse 1; diesel duty + electric standby; access clear; keys at Gatehouse and Control Room.

Electrical Main Isolation: - ELV-1: Main LV room by Control Room; lockable main incomers; LOTO points. - YDP-1: Yard distribution panel (west yard) feeding reefer racks and lighting; labeled feeders.

Reefer Plug Racks (ATS-priority): - R1: Western reefer alley Row 1; R2: Eastern reefer alley Row 2; spares in Technician cage near ELV-1.

B.5 HAZMAT Storage and Environmental Controls

Hazardous Stores: - HS-1 Battery electrolyte/acid cabinet—Workshop annex (bunded, ventilated) - HS-2 Paints/solvents flame-proof cabinet—W1 north alcove - HS-3 Oils/greases—Workshop lubricants rack

Fuel Points/Tanks: - FP-1 Diesel tank + dispensing—West yard; bonded/grounded; spill berm intact.

Storm Drains/Outfalls: - Drains D1–D6 marked “Drain—Cover Here”; drain covers stored Gatehouse cage DC-1. - Outfall OF-1: Perimeter culvert to waterway; deploy booms on risk.

Spill Kit Stations: - SK-1 Gatehouse; SK-2 W1 north door; SK-3 Workshop; SK-4 Reefer west alley; SK-5 Fuel point FP-1.

B.6 Quay and Water Safety

Quay Ladders: L1 Quay NW; L2 Mid-berth; L3 Quay SE.

Lifebuoys with Lights/Lines: LB-1 to LB-8 along quay; monthly inspection tags.

Throw-bags/Rescue Poles: RB-1 Gatehouse; RB-2 Quay mid-berth kiosk; RB-3 W1 south door.

Rescue Boat (if deployed): Mid-berth cleat cluster; signed launch path; weekly outboard checks.

B.7 Prevailing Conditions and Shelter-in-Place

Wind: Predominantly SW→NE; rainy-season squalls possible—IC selects upwind CP/muster.

Tide/Current: Ebb/flood directions noted on daily ops board; watch flood-prone drains D4–D6.

Indoor Shelter Rooms: - S-1 Admin Ground-Floor Meeting Room—limited windows; HVAC isolation switch - S-2 Warehouse 1 Office Core—solid walls; doors sealable; eyewash W1-EW-2 nearby

B.8 Traffic and Access Control

Gatehouses/Access: Main Gate (6.5990068, 3.4814838) primary; East Gate normally closed—open only by Security Supervisor.

Emergency Lanes/One-Way: Red-lined lanes along W1 north edge and quay spine; keep clear; removable bollards for Fire/EMS ingress.

Crowd-Control Barriers: Stored Gatehouse Store GC-1; deploy to cordon Media Area/exclusion zones.

B.9 Map Legend

Symbols: CP (star), Staging (triangle), Media (square), Muster A–D (circles), Hydrants/Monitors, Fire Pumps, Electrical Isolation, Reefer Racks, HAZMAT Stores, Fuel Points, Drains/Outfalls, Life Rings/Ladders, Shelter Rooms, Access Gates, Primary/Secondary Routes.

Appendix C — Emergency Resources Inventory and Maintenance Schedule

C.1 Firefighting Equipment

Portable Extinguishers: - DCP 9 kg: Min 40; Current: TBD; Monthly visual; Annual service; Hydrotest 5-year - CO_2 5 kg: Min 25; Current: TBD; Monthly visual; Annual service; Hydrotest 5-year - Foam 9 L: Min 20; Current: TBD; Monthly visual; Annual service

Hose Reels: Min 20; Current: TBD; Monthly visual; Annual flow test

Hydrants: Min 18; Current: TBD; Quarterly flow test; Annual full-system test

Foam Concentrate (F3 preferred): Min 1,000 L; Current: TBD; Annual sample QA

Thermal Imaging Cameras: Min 2; Current: TBD; Quarterly function check

Color Tagging: Green—in service; Red—OOS with defect tag and work order ID

C.2 Spill/HAZMAT Equipment

Spill Kits (oil): Min 12; Current: TBD; Inspect monthly; Restock after use

Spill Kits (chemical): Min 8; Current: TBD

Universal Absorbent Pads: Min 30 bales; Current: TBD

Booms: Min 300 m oil-only; 150 m chemical; Current: TBD

Drain Covers: Min 20; Current: TBD

Overpack Drums: Min 12; Current: TBD

Neutralizers: Battery acid, caustic, solvent; Current: TBD; SDS stored with kits

Anti-Sparking Tools: Min 2 sets; Current: TBD

C.3 Detection and Monitoring

Multi-Gas Meters (O_2, LEL, CO, H_2S): Min 8; Current: TBD; Bump test before use/shift; Calibrate quarterly

Refrigerant Detectors (R-134a/R-404A/R-452A; A2L if applicable): Min 4 portable; Current: TBD; Calibrate per OEM

Fixed Detection (if installed): Quarterly function test; Annual calibration

Calibration Gases and Certificates: Stock and log expiry dates

C.4 Respiratory/Rescue and Water Safety

SCBA Sets: Min 8; Current: TBD; Monthly checks; Annual flow test; Spare cylinders Min 16

Escape Hoods: Min 20; Current: TBD

Lifebuoys with Lights/Lines: Every 25–50 m; Current: TBD; Monthly inspection

Throw-bags: Min 10; Current: TBD

Quay Ladders: Every ~50 m; Current: TBD; Quarterly inspection

C.5 Medical

AEDs: Min 4; Current: TBD; Pads/batteries within expiry; Monthly test

Trauma Kits: Min 8; Current: TBD

Spine Boards/Stretchers: Min 4; Current: TBD

Eyewash/Showers: Min 8 stations; Weekly activation; Annual service

C.6 Power Continuity

Generators: Min 2 x [kVA TBD]; Priority loads: Reefer racks, Control Room, lighting, comms - Monthly start test; Quarterly load bank; Fuel autonomy ≥ 48 h; Water-in-fuel checks

ATS: Functional test quarterly; Critical spares: controller and contactors

Reefer Plug Racks: Current plug count: TBD; Spare plugs/connectors Min 20

C.7 Maintenance and CMMS Controls

- Inspections entered into CMMS within 24 h; defects assigned with SLA
- OOS life-safety equipment escalated same day to HSE Manager and IC
- Third-party service certificates filed and auditable

Appendix D — Training Matrix and Competency Profiles

D.1 Roles and Mandatory Competencies

Incident Commander/Deputy IC - ICS 100/200 (IC), ICS 300 (IC/Deputy) — Refresh 3 years - Emergency decision-making and dynamic risk assessment — Annual - Hot work authorization and gas testing — Annual

ERT Fire - Advanced firefighting (industrial/port) — Refresh 2 years - SCBA user — Annual competency and fit check - Thermal imaging, foam operations, exposure protection — Annual

ERT Spill/HAZMAT - HAZMAT awareness/operations — Refresh 2 years - Spill containment/booming; drain protection; decon — Annual - SDS/IMDG interpretation — Annual

ERT Medical - First Aid/CPR/AED — Refresh 2 years - Trauma management/bleeding control — Annual - Heat stress recognition/management — Annual

ERT Security - Access control/crowd management — Refresh 2 years - Evidence preservation and PFSP interfaces — Annual - Bomb threat and suspicious package protocols — Annual

Technical/Reefer - Electrical safety, LOTO — Annual - Refrigerant safety (A1/A2L), gas detection — Annual - Emergency power/ATS operations — Annual

Wardens/Marshals - Evacuation leadership/headcount — Annual - Assisted evacuation — Annual

Operators (forklift, crane, reach stacker) - Equipment certification — Refresh per OEM/authority (1–3 years) - Banksman/slinging as applicable — Refresh 2 years

All Staff and Contractors - Site induction and emergency orientation — Before access; refresh 2 years - Fire extinguisher practical — Annual - Spill awareness — Annual - Security awareness and social media restrictions — Annual

D.2 Drill Cadence (Minimum)

- Evacuation: Quarterly (include 1 night-shift and 1 no-notice annually)
- HAZMAT/refrigerant: Semi-annual (include A2L scenario if applicable)
- Full-scale multi-agency: Annual with NPA Fire/Police, LASEMA, marine rescue
- Table-top for leadership: Quarterly with injects

D.3 Duty Roster Coverage (Minimum)

- On-shift minimum ERT: Fire 3; HAZMAT 2; Medical 2; Security 2; Technical 1; IC/Deputy reachable ≤ 10 minutes
- First aiders per shift: ≥ 2 per zone (warehouse, yard/quay, admin)

D.4 Records and KPIs

- Training currency ≥ 95%
- Drill participation ≥ 90% of on-duty
- Corrective actions closed ≤ 30 days

Appendix G — Chemical and Refrigerant Inventory and SDS Index

G.1 Inventory Fields

- Material; UN/IMDG/PG; CAS; Storage location; Max quantity; SDS version/date; OEL TWA/STEL; LFL/UFL; Vapor density; Water reactivity; Detector compatibility; Primary hazards/PPE; First-aid notes; Spill kit required; Segregation; Notification thresholds.

G.2 Example Entries (Replace with Actuals)

Diesel Fuel - UN 1202; IMDG 3; PG III; CAS 68334-30-5 - Storage: Fuel tank FT-1 (bunded), Yard West - Max qty: TBD L - SDS date: TBD - OEL: Oil mists 5 mg/m3 TWA - LFL/UFL: ~0.6–7.5% vol; Vapor density: >1; Detector: LEL (catalytic/IR) - PPE: Anti-static PPE; nitrile gloves; goggles - Spill kit: Oil-only; booms; drain covers; foam for fire as needed - Segregation: Away from oxidizers

Lubricating Oil (hydraulic) - Not regulated as DG (check SDS); Storage: Workshop rack; Max qty: TBD L; OEL: Oil mists 5 mg/m3; Spill kit: Oil-only

Battery Electrolyte (sulfuric acid) - UN 2796; IMDG 8; PG II; CAS 7664-93-9 - Storage: Battery room; acid cabinet; bunded; Max qty: TBD L - OEL: 0.2 ppm STEL (check SDS); Detector: Acid gas; PPE: Acid-resistant gloves/apron/face shield - Neutralizer: Sodium bicarbonate; copious water; Segregation: Away from bases/metals - Notification: LASEPA if > TBD L enters environment

Paints/Solvents (flammable) - UN 1263; IMDG 3; PG II/III (varies); Storage: Paint locker (ventilated/flame-proof) - LFL: ~1–1.4%; Controls: No ignition sources; bonding/grounding

Cleaning Chemicals (alkaline/degreaser) - SDS-driven hazards; segregate from acids; eyewash nearby

Refrigerants - R-134a (A1, non-flammable); Asphyxiant at high conc.; OEL: ~1,000 ppm TWA (check SDS); Storage: in-use and spare cylinders in ventilated cage; Detector: IR - R-404A (A1); OEL: ~1,000 ppm TWA - R-452A (A1); OEL: per SDS - If A2L present (e.g., R-1234yf/ze): mildly flammable; monitor %LFL; ensure ventilation and no ignition sources

G.3 SDS Management

- Master SDS index accessible to staff; SDS at point-of-use; QR codes optional; annual review.

G.4 Segregation and Labeling

- IMDG segregation per class; corrosives away from bases/flammables; oxidizers isolated; GHS labeling; secondary containers labeled; storage rooms ventilated with eyewash/shower nearby.

G.5 Environmental Thresholds and Notifications

- Define reportable quantities with LASEPA/NESREA (confirm with regulators); immediate phone notification for any release to waterway; follow statutory written report timelines.