CONFIDENTIAL

GK & A
Logistics Services LTD

GK & A LOGISTICS SERVICES LTD

EMERGENCY RESPONSE PLAN

Import/Export Terminal, Warehouse, and Reefer Containers

Document No.: ERP-IE-002 | Version: 1.5

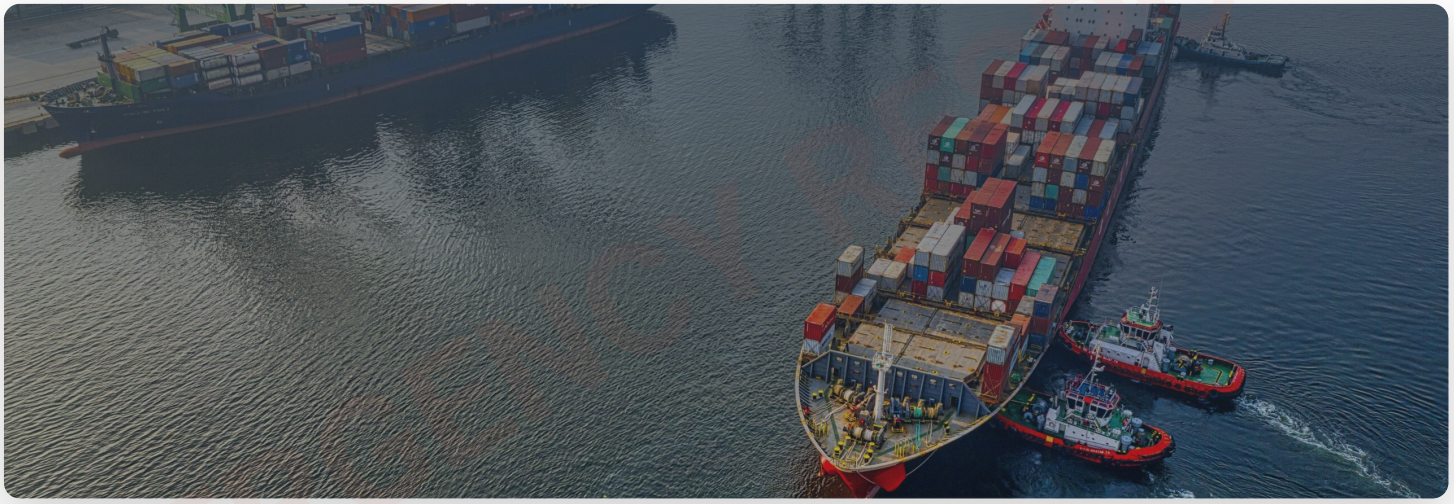

Facility: GK & A Terminal, NPA Lighter Terminal (Ikorodu)
NPA Lighter Terminal Complex, Ipakodo Road, Ipakodo
Ikorodu, Lagos State, 104101, Nigeria

EFFECTIVE DATE
November 1, 2025

REVIEW DATE
October 26, 2026

EMERGENCY CONTACT
Lagos State: Dial 112 or 727

Plan Owner: HSE Manager | Authority: Managing Director
Approval - Distribution: Internal (All Departments), NPA Liaison, Critical Contractors on NDA

© 2025 GK & A Logistics Services Ltd. All rights reserved.

Emergency Response Plan

Executive Statement

Safety, environmental protection, and legal compliance take precedence over production. This Plan is compulsory. Any deviation without prior written approval from the NPA Safety Director and the GK & A Managing Director is a breach subject to disciplinary action, removal from site, and contract termination for cause.

Introduction

This Plan is a jointly endorsed, auditable operational control developed under Nigerian Ports Authority (NPA) oversight. Procedures, notification chains, and role interfaces have been reviewed with NPA and are mandatory for all personnel and contractors on GK & A-controlled areas of the NPA Lighter Terminal, Ikorodu.

Aspect	Description
Enforcement	Roles and accountabilities are assigned in writing. Compliance is continuously monitored. Violations are escalated through disciplinary protocols and may trigger regulatory reporting to NPA and relevant authorities.
Joint Execution	GK & A and NPA Safety Officers shall co-lead emergency activations, joint drills, audits, debriefs, and corrective actions. NPA retains authority to intervene and direct operations where necessary to protect life, environment, and port security.

---

1. Purpose

This Plan establishes an integrated, zero-harm emergency management framework to:

Objective	Description
Protection	Protect people, property, cargo integrity, and the environment
Prevention	Prevent escalation and minimize business interruption
Compliance	Achieve and evidence compliance with NPA directives, ISPS Code, IMDG Code, ISO 45001 and ISO 14001 principles, ILO/IMO Code of Practice for Safety and Health in Ports, Lagos State and Federal environmental obligations
Standards	Apply the most stringent requirement when standards overlap

Measurable Objectives

Metric	Target
Fatalities	Zero
Serious Injuries	Zero (life-altering)
Notification Time	Initiated within 5 minutes of emergency declaration
Headcount Reconciliation	Full headcount within 10 minutes of evacuation order
Drill Participation	≥ 90% of on-duty personnel
Corrective Action Closure	≤ 30 days
Spill Containment	No uncontrolled discharge to water; all spills contained within site boundary

---

2. Scope

Applies 24/7 to GK & A-controlled operations within the NPA Lighter Terminal, Ikorodu:

Area	Description
Primary Operations	Quay, jetties, cargo yards, and operational zones under NPA regulation
Storage	Warehouses and open storage areas
Refrigeration	Reefer container stacks, plug-in racks, and associated power/refrigeration systems

Interfaces and Inclusions

Group	Coverage
Personnel	All employees, contractors, subcontractors, visitors, clients, and third-party carriers
Third Parties	Tenants or third parties while in GK & A-controlled zones
Regulatory Oversight	NPA Safety Officers participate in activations, drills, debriefs, and reviews

Exclusions

Category	Details
Non-GK & A Premises	Excludes non-GK & A premises beyond defined interface points
Mutual Aid	GK & A shall support NPA-directed mutual aid and information sharing as requested

---

3. Definitions

Term	Definition
Emergency	Unplanned event threatening life, environment, assets, cargo, or operations
Incident Commander (IC)	On-scene authority responsible for declaring and managing the incident; approves re-entry
Deputy IC	Authorized alternate who assumes command if needed
Emergency Response Team (ERT)	Trained responders for Fire, HAZMAT/Spill, Medical, Refrigerant/Technical, Security
Public Information Officer (PIO)	Sole authorized spokesperson for external communications
Muster Point	Designated safe assembly location for headcount after evacuation
Exclusion Zone	Controlled perimeter restricting access to trained, authorized personnel only
ALARP	As Low As Reasonably Practicable; risk threshold for operations and rescue
Refrigerant	Substances used in reefers (e.g., A1: R-134a, R-404A, R-452A; A2L where applicable)
Shelter-in-place	Controlled indoor protection procedure during external airborne or security threats
Command Post (CP)	Primary/secondary locations where IC and key staff coordinate response
Staging Area	Controlled location where resources and teams assemble before tasking

---

4. Regulatory and Standards Alignment

This Plan aligns with and references:

Regulation/Standard	Description
NPA Safety Directives	Safety directives, permits, and port facility requirements
ISPS Code	Port Facility Security Plan (PFSP) interfaces
IMDG Code	SDS obligations; dangerous goods segregation
Environmental Laws	Lagos State and Federal environmental laws; LASEPA/NESREA notifications
ILO/IMO Code	Code of Practice for Safety and Health in Ports
LASEMA/NEMA	Incident coordination guidance
LSSC	Lagos State Safety Commission guidance
LASWA/NIWA	Coordination for waterway/marine incidents
Good Practice	NFPA firefighting guidance; EN 378 for refrigerating systems and machinery rooms (where applicable)
Data Protection	Nigeria Data Protection Act (NDPA) for incident/CCTV data handling

Where requirements differ, the stricter requirement applies.

---

5. Risk Profile and Major Accident Hazards (MAH)

Top Credible Scenarios

Scenario	Description
Fire	Warehouse or reefer-stack fire; electrical cabinet fires; fuel fires
Hazardous Spills	Fuels, oils, chemicals, battery acid
Refrigerant Releases	A1 asphyxiants; A2L mildly flammable
Medical Emergencies	Serious injury/medical emergencies; heat illness
Security Events	Intrusion, theft, bomb/suspicious package, civil disturbance
Severe Weather	Lightning, high winds, flooding, storm surge
Water Incidents	Person overboard at quay
Equipment Failures	Crane/rigging failure; dropped container; stack collapse; plant rollover
Confined Space	Exposure/rescue (sumps, voids, reefer machinery spaces)
Cyber Incidents	Impacting safety systems, reefer monitoring, access control
Utility Loss	Black start; emergency power changeover

Seasonal Considerations

Season	Risk	Mitigation
Rainy Season	Flooding risk	Pre-season stormwater inspections
Hot Season	Heatwaves	Work/rest cycles and hydration protocols

---

6. Governance, Command, and Responsibilities

6.1 Command and Control

Element	Description
ICS Structure	IC; Sections for Operations, Planning, Logistics, Finance/Admin; Safety Officer; PIO; NPA Liaison Officer. Scalable per incident
Command Posts	Primary CP [insert location]; Secondary CP [insert location upwind/up-current]; Media Area [insert location]
Staging Areas	[insert primary/secondary staging points]

6.2 Roles and Authorities

Role	Responsibilities
Managing Director	Provides resources; approves ERP revisions; chairs GK & A side of Joint Emergency Steering Committee; authorizes escalations and CAPEX for life-safety
NPA Safety Director	Co-chairs governance; endorses revisions; ensures NPA alignment
Incident Commander	Declares emergencies; sets priorities; approves re-entry; orders evacuations and search/rescue; authorizes hot work post-incident via permit
Deputy IC	Ensures continuity of command; assumes IC role if needed
NPA Liaison Officer	Coordinates NPA Port Control, Port Police, Marine units; ensures statutory notifications to agencies
ERT Leaders	Task, supervise, and account for teams; ensure PPE and gas monitoring are used; report status to IC
Warehouse Controller	Executes emergency shutdown; secures hazardous storage; supports accountability
Reefer Maintenance Lead	Manages reefer power isolation/restore; engages certified refrigeration contractors; safeguards temperature-critical cargo
Security Supervisor	Establishes perimeters; manages access control and gate protocols; preserves evidence; liaises with NPA Port Police
PIO	Controls public/media/customer messaging; issues holding statements; maintains rumor control; ensures social media policy enforcement
All Personnel/Contractors	Raise alarms; stop work; evacuate; follow IC/ERT instructions; participate in drills; support headcounts. Non-compliance results in removal and disciplinary action

6.3 Minimum Staffing and Duty Rosters

Requirement	Details
On-shift ERT	Fire 3; HAZMAT 2; Medical 2; Security 2; Technical 1; IC/Deputy IC accessible within 10 minutes
Competency Currency	All on-shift ERT members shall be current on SCBA and gas monitoring within 12 months; first aiders with AED competency within 24 months

6.4 Business Continuity Linkage

Aspect	Description
BCP Tie-in	Reefer continuity, alternate cold storage, mutual aid for reefer power, client comms during prolonged outages

---

7. Activation, Notification, and Initial Actions

7.1 Triggers

Trigger	Description
Fire/Explosion	Fire/explosion/smoke alarm
Chemical Spill	Chemical or fuel spill
Refrigerant Leak	Refrigerant alarm/odor
Medical Emergency	Serious injury
Security Incident	Security incident
Severe Weather	Severe weather/flooding/lightning
Structural Threat	Structural compromise
Water Incident	Person overboard
Power Loss	Extensive power loss affecting reefers

7.2 First Five Minutes (Mandatory)

Action	Description
Raise Alarm	Pull station or radio in clear text "EMERGENCY – [Location] – [Type]"
Declare Emergency	IC or senior-most present declares emergency; stands up Command Post; assigns scribe; opens Incident Log with time-stamps
Dispatch ERT	Confirm PPE (SCBA for unknown atmospheres)
Notify Authorities	Notify NPA Port Control immediately; escalate to Fire/EMS/Police/LASEMA/LASWA/NIWA as needed per matrix
Secure Site	Lock down or open gates as appropriate to incident type to secure site or facilitate emergency ingress

7.3 First Ten Minutes

Action	Description
Evacuation/Shelter	Order evacuation or shelter-in-place as conditions dictate
Exclusion Zones	Establish exclusion zones; deny entry
Headcount	Achieve full headcount reconciliation at muster points within 10 minutes; identify missing persons; do not start rescue unless risk is ALARP and approved by IC
SITREP	Issue SITREP 1 to leadership and NPA

7.4 Alerting Systems

System	Description
Primary	Site sirens/PA; UHF radios (Channels: 1 Ops, 2 ERT, 3 Command); SMS/app alerts
Backup	Air horns, runners

---

8. Emergency Response Procedures

General Priorities

Priority	Description
1. Protect Life	Immediate protection of personnel
2. Isolate Hazards	Contain and control the incident
3. Prevent Escalation	Stop the incident from worsening
4. Protect Environment	Prevent environmental damage
5. Preserve Evidence	Maintain evidence for investigation

8.1 Fire

Aspect	Procedure
PPE	Full structural gear and SCBA for interior/close approach
Electrical Fires	Isolate power first if safe; use CO2/DCP; avoid water on live components
Flammable Liquid Fires	Apply foam; protect drains; deploy booms to capture runoff; avoid fluorinated foams unless no alternative; prefer fluorine-free foam (F3)
Warehouse/Stack Fires	Establish 360° size-up; protect exposures; set collapse zones; use TIC to confirm knockdown; ventilate cautiously to prevent flashover; compartment doors stay closed until cooled and monitored
Post-fire	Fire watch 60 minutes minimum; water/runoff containment and sampling; document all actions and foam use

8.2 Hazardous Spills/HAZMAT

Step	Action
Approach	Approach upwind/upstream; identify via SDS/IMDG; don chemical-resistant PPE; consider SCBA for unknown/toxic atmospheres
Control	Stop the source; isolate ignition sources; ground/bond for flammables; deploy drain covers, booms, absorbents, temporary bunds; protect watercourses
Collection	Overpack drums, labeled containers; segregate waste; store in designated HAZMAT area for licensed disposal
Notifications	NPA Port Control; LASEPA/NESREA where thresholds met; record volumes and materials
Decontamination	Establish gross decon for responders/casualties when required before EMS handover

8.3 Refrigerant Leaks (Reefer Stacks)

Hazards

Hazard	Description
A1	Oxygen displacement
A2L	Mild flammability; ignition risk; decomposition products if heated

Immediate Controls

Control	Action
Evacuation	Evacuate immediate area; mark no-ignition zone
Cordon	Minimum cordon: 50 m if concentration and wind unknown; adjust based on readings
Hot Work	Prohibit hot work; isolate electrical power to affected unit(s)

Monitoring

Equipment	Procedure
Leak Detector	Use calibrated refrigerant leak detector (NDIR/IR for halocarbons) plus multi-gas meter
Alarm Set-points	Warn at 10% LFL for A2L; evacuate/cordon at ≥20–25% LFL; manage A1 as asphyxiant—use SDS OEL (often ~1,000 ppm TWA; confirm per SDS)

Response

Action	Description
Ventilation	Ventilate naturally or mechanically; ensure continuous ventilation in reefer alleys; interlock hot work shutdown where fixed detection exists
Repair	Only qualified technicians to isolate/repair; recover refrigerant to approved cylinders; record loss and service details

Re-occupy Only When

Parameter	Acceptable Range
O2	19.5–23.5%
LEL	< 10%
Refrigerant	Below OEL per SDS
Stability	Two consecutive stable readings 5–10 minutes apart

8.4 Medical Emergencies

Step	Action
Scene Safety	Ensure scene safety; announce "Medical Emergency – General Hospital Ikorodu"; deploy AED/trauma kit
First Aid	DRSABC; control bleeding; burns: cool with clean water (≥20 minutes); chemical exposures: flush ≥15 minutes and consult SDS
Heat Stress	Remove from heat, active cooling, hydration, monitor vitals
EMS Coordination	Coordinate LASAMBUS/112/767; guide ambulance through designated gate; ensure casualty/witness logs; decon equipment after use

8.5 Security Incidents

Incident Type	Response
Lockdown	Lockdown/access control per PFSP; badge deactivation if required; ensure CCTV preservation and evidence handling
Bomb/Suspicious Package	Follow checklist; evacuate upwind; avoid radios within 15 m of suspect device
Intrusion/Theft	Do not pursue; preserve scene; notify NPA Port Police
Civil Disturbance	Shelter-in-place; safe room protocols; code words for silent alerts; comply with law enforcement
Communications	PIO manages all external comms; staff prohibited from social media posting

8.6 Severe Weather and Flooding

Monitoring

Parameter	Action
Alerts	Lightning alerts; wind thresholds; tidal/surge data

Actions

Action	Description
Secure Assets	Secure loose cargo/equipment; suspend high-risk work; cease crane operations above defined wind speeds
Protect Goods	Elevate vulnerable goods; protect critical records; shut non-essential power
Stormwater	Activate stormwater controls; deploy sandbags/booms; isolate drains (where valved)
Reefer Continuity	Transfer to emergency power per prioritization matrix; manual temp checks/logs during outages
Post-Event	Structural/electrical/environmental inspections; document findings and corrective actions

8.7 Person Overboard

Step	Action
Alert	Shout "Man Overboard"; maintain constant visual; point at casualty
Equipment	Throw lifebuoy with light/line; deploy additional flotation and throw-bags
Vessels	Halt nearby craft unless directed; notify NPA Marine/Police; launch designated rescue craft if safe; approach leeward; avoid crush points
Recovery	Treat for hypothermia/aspiration; call ambulance; preserve evidence; debrief

8.8 Confined Space Incident/Rescue

Requirement	Procedure
Entry Protocol	Do not enter without permit and rescue plan; perform atmospheric testing; continuous monitoring
Rescue	Rescue only by trained team with retrieval systems and standby; use SCBA or supplied air as required; keep entry/exit logs

8.9 Crane/Load Handling Incidents

Action	Description
Isolate	Establish collapse zone; isolate area; confirm structural stability
Recovery	Do not move load until assessed; engage specialist recovery; investigate rigging failure; preserve lifting gear as evidence

8.10 Cyber Incident Impacting Safety/Operations

Response	Action
Incident Response	Activate incident response; isolate affected networks; move to manual controls for safety-critical systems (reefer monitoring, access control) per BCP; maintain paper logs; notify leadership and NPA if port operations affected

8.11 Utility Loss/Black Start

Step	Action
Checklist	Black start checklist: verify generator readiness; initiate ATS/manual transfer; confirm priority loads (reefer racks, control room, lighting, comms); load shed per matrix; verify fuel autonomy and quality (water-in-fuel test); document times and loads

---

9. Evacuation, Shelter-in-Place, Accountability, and Re-entry

9.1 Evacuation

Triggers

Trigger	Description
Fire	Fire incident
HAZMAT	Hazardous material/refrigerant release
Structural	Structural threat
Water	Person overboard in proximity
Security	As per IC directive
Weather	Severe weather conditions

Routes and Muster Points

Element	Description
Routes	Use primary/secondary routes to four muster points located upwind/up-current and away from reefer banks and HAZMAT stores; maps in Appendix B; muster capacity limits posted
Assisted Evacuation	Buddy system; evacuation chairs where needed; Wardens/Marshals sweep zones, stairwells, amenities
Vehicles	Do not use unless directed for controlled egress or to clear critical paths

9.2 Shelter-in-Place

Trigger

Trigger	Description
External Threat	External toxic plume; civil disturbance/armed threat; lightning with no safe egress

Actions

Action	Description
Move Indoors	Move indoors; close doors/windows; switch off ventilation; seal gaps; stay tuned to Channel 3; await all-clear

9.3 Accountability

Procedure	Description
Headcount	Headcount completed within 10 minutes using T-cards, access logs, visitor registers, PTW lists; report missing persons with last known location; IC approves search-and-rescue only when risk is ALARP

9.4 Re-entry and Re-energization

IC grants re-entry with NPA concurrence after

Requirement	Standard
Atmosphere	O2 19.5–23.5%; LEL < 10%; CO < 25 ppm; H2S/other toxics below OEL per SDS; refrigerant below OEL per SDS; two consecutive stable readings 5–10 minutes apart
Physical	No visible smoke/heat; structural integrity confirmed; utilities safe; spills neutralized/contained; drains protected

Phased Re-entry

Phase	Description
Essential	Essential personnel first
Full	Full re-energization via permit-to-work and hot work permits as applicable

Post Re-entry

Action	Description
Fire Watch	60-minute fire watch and status update to all staff/clients as needed

---

10. Communications and Information Management

10.1 Radio and Channels

Channel	Use
1	Operations
2	ERT
3	Command
Protocol	Plain language; call signs; minimize non-essential traffic. Radio fallback: spare radios, charged batteries, cellular PTT if available

10.2 Notifications and Scripts

Action	Description
Authorities	IC or delegate notifies NPA Port Control; Lagos State Fire and Rescue; LASEMA/NEMA; LASAMBUS (112/767); Nigeria Police (including Marine); LASEPA/NESREA; LASWA/NIWA; power utility; mutual aid
Scripts	Use standard PA/holding statements (Appendix F)

10.3 Public Information

Protocol	Description
PIO Only	Only PIO communicates externally; all statements approved; social media posting by staff prohibited

10.4 Information Governance

Element	Description
Records	Incident Log and Situation Reports (SITREPs) maintained; evidence preserved (CCTV, photos, samples) with chain-of-custody
Data Protection	Handle personal data and CCTV per NDPA; restrict access; define retention and deletion for non-incident footage

10.5 Records Retention

Requirement	Duration
Incident Records	Minimum five years for incident records, training, detector calibrations, environmental manifests
Extensions	Longer if required by regulator/insurer

---

11. Resources, Equipment, and Maintenance

11.1 Minimum Critical Inventory

Firefighting

Equipment	Minimum
DCP/CO2/foam extinguishers	By hazard class
Hydrants/hose reels	As required
Fire pumps	As required
Foam trailer	F3 preferred
Thermal imaging cameras	As required

HAZMAT

Equipment	Minimum
Spill kits	Oil/chemical/universal
Drain covers	As required
Absorbent booms	As required
Overpack drums	As required
Neutralizers	As required

Detection

Equipment	Minimum
Multi-gas meters	O2, LEL, CO, H2S
Refrigerant detectors	Compatible with installed gases
Fixed detection	Where installed

Respiratory/Rescue

Equipment	Minimum
SCBA sets	With spare cylinders
Escape hoods	As required
Lifebuoys	With lights/lines every 25–50 m
Throw-bags	As required
Quay ladders	As required
Rescue boat	Readiness

Medical

Equipment	Minimum
First-aid kits	As required
Trauma kits	As required
AEDs	As required
Stretchers/spine boards	As required
Eyewash/shower stations	As required

Power

Equipment	Minimum
Emergency generators	With ATS prioritizing reefer circuits, control room, lighting, comms
Fuel autonomy	≥ 48 hours
Critical spares	ATS controller, breakers, reefer plugs/connectors

11.2 Maintenance and Assurance

Activity	Frequency
CMMS inspections	As scheduled
Visual checks	Monthly
Functional tests	Quarterly
Detector bump tests	Per shift use
Calibration	Per manufacturer
SCBA flow tests	As required
AED maintenance	Pads/battery within expiry
Hydrant tests	Flow tests
Generator tests	Monthly load tests; quarterly full-load bank tests
Color-tag system	In service/out of service
Third-party service	Contracts for pumps, detectors, SCBA, AEDs, generators, reefer systems

---

12. Training, Competency, and Drills

12.1 Induction (Mandatory for All Before Access)

Topic	Description
Site Hazards	Overview of site hazards
Alarms	Emergency alarm procedures
Muster Points	Location and use of muster points
Stop-work	Authority to stop unsafe work
Incident Reporting	How to report incidents
PPE	Personal protective equipment requirements
PTW	Permit-to-work system
Social Media	Restrictions on social media use

12.2 Core Training (All Staff)

Training	Description
Fire Extinguisher	Use of portable fire extinguishers
Spill Awareness	Recognition and basic response to spills
First-Aid Awareness	Basic first aid awareness
Security Awareness	Security awareness training
Emergency Comms	Emergency communication procedures
Shelter-in-Place	Shelter-in-place procedures

12.3 Role-Specific Competencies

ERT

Competency	Description
Advanced Firefighting	Industrial/port firefighting techniques
HAZMAT Spill Control	Spill containment and control
SCBA	Self-contained breathing apparatus use
Confined Space	Confined space awareness
Water Rescue	Water rescue elements
Incident Command	ICS 100/200; ICS 300 for IC/Deputy
Refrigerant Hazards	Refrigerated cargo hazards

Operators

Competency	Description
Equipment	Forklift/crane operation
Banksman	Banksman/signaller training
Load Securement	Cargo load securement
Work at Height	Work at height safety
LOTO	Lockout/tagout procedures

Technicians

Competency	Description
Refrigerant Safety	Refrigerant safety including A2L awareness
Electrical Safety	Electrical safety procedures
Arc-flash	Arc-flash awareness
Hot Work	Hot work permit system
LOTO	Lockout/tagout procedures

Wardens/Marshals

Competency	Description
Evacuation Leadership	Leading evacuations
Headcount	Headcount procedures
Crowd Management	Crowd management techniques
Assisted Evacuation	Assisting persons with mobility issues

PIO/Comms

Competency	Description
Crisis Comms	Crisis communication techniques
Media Handling	Media handling procedures
Message Maps	Creating and using message maps
Rumor Control	Controlling rumors during emergencies

12.4 Drill Program and Cadence

Drill Type	Frequency
Site-wide Evacuation	Quarterly (include 1 night-shift and 1 no-notice annually)
HAZMAT/Refrigerant	Semi-annual (at least one A2L scenario)
Multi-agency Full-scale	Annual with NPA and emergency services (include water rescue)
Table-top	Quarterly for leadership/supervisors with injects

12.5 KPIs and Records

KPI	Target
Headcount Time	Within 10 minutes
Response Times	As defined
Participation	≥ 90% on-duty participation
Corrective Actions	Closed ≤ 30 days
Requalification	Before expiry
Records	Training matrix and certificates maintained

---

13. Post-Incident Actions and Reporting

13.1 Stabilization and Handover

Action	Description
Scene Safety	Confirm scene safety
Command Retention	Maintain command until formal transfer to authorities
Documentation	Document handover times and accepting authority

13.2 Notifications

Recipient	Timeline
NPA	Immediate
Environmental	LASEPA/NESREA within prescribed periods
Insurers	Within policy terms
Clients	Per contract/PIO guidance

13.3 Investigation

Element	Description
Lead Investigator	Appointed by HSE Manager
Methods	5 Whys, bow-tie, fault tree
Evidence	Preserve evidence with chain-of-custody
Interviews	Documented interviews
Timeline	Reconstructed via CCTV/access logs

13.4 Corrective and Preventive Actions (CAPA)

Action	Description
Assignment	Assign owners and due dates
Verification	Verify effectiveness
Management Review	Include in management review
ERP Updates	Update ERP/SOPs within 30 days where required
MOC	Raise MOC for systemic changes

13.5 Environmental Remediation

Activity	Description
Sampling	Sampling/monitoring
Regulator	Regulator engagement
Contractors	Licensed waste contractors with manifests retained

13.6 Learning and Reporting

Output	Description
Final Report	Final incident report
Regulatory	Regulatory submissions
Insurer	Insurer loss pack
Client	Client reports
Lessons	Lessons shared via safety alerts/toolbox talks

---

14. Financial Provisioning and Insurance

Element	Description
Emergency Funding	Pre-approved thresholds for rapid procurement and contractor call-outs; emergency vendor list activated by IC/Procurement
Property Damage	Property damage/BI insurance
Machinery Breakdown	Machinery breakdown (generators/reefer electrical)
Terminal Liability	Terminal operators liability/bailee's liability
Employers' Liability	Employers' liability/workers' compensation
Public Liability	Public liability
Environmental	Environmental impairment/pollution liability
Marine Cargo	Marine cargo as applicable
Claims Management	Immediate loss notice; mitigation; evidence preservation; adjuster coordination; cost tracking; salvage/repair decisions; claims coordinator designated

---

15. Plan Governance, Review, and Distribution

Element	Description
Ownership	Plan Owner HSE Manager; approval by Managing Director; NPA Safety concurrence recorded
Review Cycle	Annual or after major incident, regulatory change, significant exercise findings, or material facility/process change
Document Control	Versioning; revision log; change summaries and approvers; controlled copies in Control Room, Security Gatehouse, ERT lockers; digital repository access-controlled
Assurance	Internal audits and joint NPA reviews; KPI dashboard to leadership; actions tracked to closure
MOC	Required for any change affecting layout, risks, alarms, egress, utilities, or emergency power priorities; training and communication delivered before change goes live

---

16. Appendices

Appendix	Content
A	Contact and Notification Matrix (internal, regulators, emergency services, mutual aid, utilities, insurers; time limits and scripts)
B	Site Plans, Zoning, Evacuation Routes, Muster Points; hydrants, shut-offs, reefer plug racks; Command Post and Staging; Media Area
C	Emergency Resources Inventory and Maintenance Schedule (minimum quantities; inspection/calibration/test cadences; tagging rules)
D	Training Matrix and Role Competency Profiles (currency/recert intervals; duty roster coverage)
E	Checklists and Forms (activation; size-up; headcount; search-and-rescue authorization; re-entry; hot work and gas test; SITREP; investigation; CAPA; decon; bomb threat)
F	Standard PA Scripts, Alarm Tones, and Media Holding Statements (fire, spill, medical, severe weather, security lockdown, reefer service interruption)
G	Chemical/Refrigerant Inventory and SDS Index (OELs, LFLs, detector compatibility)
H	Regulatory/Standards Reference List and Compliance Mapping (NPA, ISPS, IMDG, LASEPA/NESREA, LSSC, LASWA/NIWA, EN 378, NFPA)
I	Insurance Certificates and Broker/Insurer Contacts (notification windows, claim pack contents)
J	Mutual-Aid Agreements/MoUs and Service SLAs (refrigeration contractors, spill response, fuel supply, heavy lift/crane recovery)
K	Glossary and Acronyms
L	Records Retention Schedule (including NDPA data governance)

Compliance Statement

Compliance with this Plan is compulsory and jointly enforced by GK & A and NPA. All personnel, contractors, and visitors are bound by these requirements. Any deviation, delay, or shortcut is a breach of GK & A and NPA mandates and will trigger immediate corrective measures and

disciplinary action, up to removal from site and contract termination for cause. Continuous readiness, rapid notification, disciplined execution, and complete documentation are non-negotiable.

90-Day Implementation Roadmap

Task	Timeline
Populate Appendices	A–G with site-specific names, 24/7 numbers, maps, inventories, and forms
Confirm Locations	Command Post, Staging, and Media Areas on plans; post evacuation maps in English and Yoruba; show prevailing wind/tidal directions
Alert Systems	Verify siren/PA coverage; prepare backup alert kits (air horns, runners)
Equipment Inventory	Inventory and close gaps on critical equipment (SCBA, detectors, spill kits, foam F3, life rings/throw-bags, AEDs, reefer plugs/spares)
Calibration	Calibrate/bump-test detectors; label due dates; stock calibration gases
Duty Rosters	Finalize duty rosters; minimum on-shift ERT coverage; publish escalation tree
Power Systems	Test ATS, black start, and 48-hour fuel autonomy; define load-shedding and reefer prioritization matrix
Tabletop Exercise	Execute a tabletop within 30 days (scenario: refrigerant leak + concurrent medical)
Evacuation Drill	Conduct a night-shift evacuation drill within 60 days
Full-scale Drill	Schedule a full-scale multi-agency drill within 90 days (include water rescue and reefer incident)
Communications	Issue social media restrictions reminder; brief PIO and Client Relations on scripts
CAPA Tracker	Launch CAPA tracker; report progress monthly to the Joint Emergency Steering Committee

Appendix A — Contact and Notification Matrix (External Authorities and Insurers)

A.1 External Authorities (Ikorodu/Lagos)

Authority	Contact	Details
NPA Port Control (Ikorodu)	Phone: +234 901 222 3101	Email: ikorodu.portcontrol@nigerianports.gov.ng (verify with NPA Liaison)
NPA Port Police (Ikorodu)	Phone: +234 902 222 3102	Email: portpolice.ikorodu@nigerianports.gov.ng (verify with NPA Liaison)
Nigeria Police Marine/Water Unit	Phone: +234 903 222 3103	Email: info@npf.gov.ng (use phone for activation; email for follow-up)
Lagos State Fire and Rescue Service	Phone: +234 904 222 3104	Email: info@lsfrs.lagosstate.gov.ng (verify current address; activation via 112/727 only)
LASAMBUS/Ambulance (Lagos)	Phone: +234 905 222 3105	Email: info@health.lagosstate.gov.ng (use 112/727 for activation; email for admin follow-up)
LASEMA (Emergency Management Agency)	Phone: +234 906 222 3106	Email: info@lasema.lagosstate.gov.ng
NEMA (Federal)	Phone: +234 907 222 3107	Email: info@nema.gov.ng
LASEPA (Environmental Protection Agency)	Phone: +234 908 222 3108	Email: info@lasepa.lagosstate.gov.ng
NESREA (Federal Environmental Regulator)	Phone: +234 909 222 3109	Email: info@nesrea.gov.ng

Authority	Contact	Details
LASWA (Waterways Authority)	Phone: +234 910 222 3110	Email: info@laswa.lagosstate.gov.ng
NIWA (National Inland Waterways Authority)	Phone: +234 911 222 3111	Email: info@niwa.gov.ng
Power utility control room (Ikorodu area – likely Ikeja Electric)	Phone: +234 912 222 3112	Email: customercare@ikejaelectric.com (verify service coverage for your feeders)
Mutual Aid — Ikorodu Jetty Operators Association	Phone: +234 913 222 3113	Email: admin@ijoa.org.ng (verify)
Marine Tug/Rescue — Ikorodu Marine Services	Phone: +234 914 222 3114	Email: ops@ikorodumarine.com.ng (verify)
Industrial Fire Support (Regional)	Phone: +234 915 222 3115	Email: duty@regionalfiresupport.com.ng (verify)

A.2 Insurance and Claims

Insurer	Contact	Details
Broker — NaijaRisk Brokers (Primary)	Phone: +234 701 444 5101	Email: service@naijariskbrokers.com.ng (verify)
Broker — NaijaRisk Brokers (Backup)	Phone: +234 702 444 5102	Email: claims@naijariskbrokers.com.ng (verify)
Property/Business Interruption — Guardian Assurance	Phone: +234 703 444 5103	Policy: TBD-PA-2025-001; Email: claims@guardianassurance.com.ng (verify)
Machinery Breakdown — Atlas Engineering Ins.	Phone: +234 704 444 5104	Policy: TBD-MB-2025-002; Email: claims@atlasengineeringins.com.ng (verify)
Terminal Operators/Bailee's Liability — Coastal Liability Ins.	Phone: +234 705 444 5105	Policy: TBD-TL-2025-003; Email: claims@coastalliability.com.ng (verify)
Employers' Liability/Workers' Comp — Safeguard Ins.	Phone: +234 706 444 5106	Policy: TBD-EL-2025-004; Email: claims@safeguardins.com.ng (verify)
Public Liability — Guardian Assurance	Phone: +234 707 444 5107	Policy: TBD-PL-2025-005; Email: liability@guardianassurance.com.ng (verify)
Environmental Impairment/Pollution — GreenShield Ins.	Phone: +234 708 444 5108	Policy: TBD-EP-2025-006; Email: envclaims@greenshieldins.com.ng (verify)
Marine Cargo (if applicable) — OceanCover	Phone: +234 709 444 5109	Policy: TBD-MC-2025-007; Email: claims@oceancover.com.ng (verify)

Appendix B — Site Plans, Zoning, Evacuation, and Key Locations

B.1 Site Identification

Element	Details
Facility	GK & A Terminal, NPA Lighter Terminal (Ikorodu)
Address	NPA Lighter Terminal Complex, Ipakodo Road, Ipakodo, Ikorodu, Lagos State, 104101, Nigeria
Main Gate GPS	6.5990068, 3.4814838
Emergency Activation	Dial 112 or 727
Site Emergency Email	info@gkaport.com

B.2 Command, Staging, and Media Points

Location	Details
Primary Command Post (CP)	Terminal Control Room, Admin Block Level 1; Reference: Admin Block near Main Gate at 6.5990068, 3.4814838; Features: Hard-wired power/UPS; dedicated radios/spares; wall site plan; Incident Log kit; gas monitor cache
Secondary CP	Security Gatehouse (co-located at Main Gate); Reference: 6.5990068, 3.4814838; Features: Redundant radios; CCTV access; duplicate muster board; basic logs
Staging Area S1	Yard staging bay north of Warehouse 1; Reference: Signed "S1—Staging"; cones and signage stored at Gatehouse
Media Area	Visitor car park outside the operations fence near Main Gate; Reference: Signed "Media Area—PIO Control Only"; segregated from muster points

B.3 Evacuation Routes and Muster Points

Element	Description
Primary Routes	From warehouses and reefer alleys to North Car Park and West Laydown via signed paths; avoid reefer stacks and HAZMAT stores
Secondary Routes	Southern and eastern egress to South Green Space and East Open Ground
Muster Points	A: North Car Park (capacity 120); B: West Laydown Yard (capacity 120); C: South Green Space (capacity 150); D: East Open Ground (capacity 150)
Accessibility	Evacuation chairs at Admin Block stairwell and Warehouse 1 mezzanine; wardens sweep amenities/stairwells before leaving
Signage	Bilingual English/Yoruba; reflective; "Avoid Reefer Stacks" icons

B.4 Fire Water Supplies and Critical Utilities

Equipment	Location/Details
Hydrants/Monitors	H1 Quay NW; H2 Quay mid-berth; H3 Quay SE; H4 Perimeter west curve; H5 W1 north wall; H6 W1 south wall; H7 Admin frontage; H8 Fuel point bund (outside); H9 Reefer aisle; H10 Yard east perimeter; Fixed monitors: M1 Quay NW; M2 Quay SE
Fire Pump Room(s)	PR-1: Annex south of Warehouse 1; diesel duty + electric standby; access clear; keys at Gatehouse and Control Room
Electrical Main Isolation	ELV-1: Main LV room by Control Room; lockable main incomers; LOTO points; YDP-1: Yard distribution panel (west yard) feeding reefer racks and lighting; labeled feeders
Reefer Plug Racks	R1: Western reefer alley Row 1; R2: Eastern reefer alley Row 2; spares in Technician cage near ELV-1

B.5 HAZMAT Storage and Environmental Controls

Location	Details
Hazardous Stores	HS-1 Battery electrolyte/acid cabinet—Workshop annex (bunded, ventilated); HS-2 Paints/solvents flame-proof cabinet—W1 north alcove; HS-3 Oils/greases—Workshop lubricants rack
Fuel Points/Tanks	FP-1 Diesel tank + dispensing—West yard; bonded/grounded; spill berm intact
Storm Drains/Outfalls	Drains D1–D6 marked "Drain—Cover Here"; drain covers stored Gatehouse cage DC-1; Outfall OF-1: Perimeter culvert to waterway; deploy booms on risk
Spill Kit Stations	SK-1 Gatehouse; SK-2 W1 north door; SK-3 Workshop; SK-4 Reefer west alley; SK-5 Fuel point FP-1

B.6 Quay and Water Safety

Equipment	Location
Quay Ladders	L1 Quay NW; L2 Mid-berth; L3 Quay SE
Lifebuoys with Lights/Lines	LB-1 to LB-8 along quay; monthly inspection tags
Throw-bags/Rescue Poles	RB-1 Gatehouse; RB-2 Quay mid-berth kiosk; RB-3 W1 south door
Rescue Boat	Mid-berth cleat cluster; signed launch path; weekly outboard checks

B.7 Prevailing Conditions and Shelter-in-Place

Condition	Details
Wind	Predominantly SW→NE; rainy-season squalls possible—IC selects upwind CP/muster
Tide/Current	Ebb/flood directions noted on daily ops board; watch flood-prone drains D4–D6
Indoor Shelter Rooms	S-1 Admin Ground-Floor Meeting Room—limited windows; HVAC isolation switch; S-2 Warehouse 1 Office Core—solid walls; doors sealable; eyewash W1-EW-2 nearby

B.8 Traffic and Access Control

Element	Details
Gatehouses/Access	Main Gate (6.5990068, 3.4814838) primary; East Gate normally closed—open only by Security Supervisor
Emergency Lanes/One-Way	Red-lined lanes along W1 north edge and quay spine; keep clear; removable bollards for Fire/EMS ingress
Crowd-Control Barriers	Stored Gatehouse Store GC-1; deploy to cordon Media Area/exclusion zones

B.9 Map Legend

Symbol	Meaning
CP	Command Post (star)
Staging	Staging Area (triangle)
Media	Media Area (square)
Muster A–D	Muster Points (circles)
Hydrants/Monitors	Fire water supplies
Fire Pumps	Fire pump locations
Electrical Isolation	Electrical isolation points
Reefer Racks	Reefer plug rack locations
HAZMAT Stores	Hazardous material storage
Fuel Points	Fuel storage and dispensing
Drains/Outfalls	Storm drains and outfalls
Life Rings/Ladders	Water safety equipment
Shelter Rooms	Indoor shelter locations
Access Gates	Entry/exit points
Primary/Secondary Routes	Evacuation routes

Appendix C — Emergency Resources Inventory and Maintenance Schedule

C.1 Firefighting Equipment

Equipment	Minimum	Current	Maintenance
Portable Extinguishers			
DCP 9 kg	40	TBD	Monthly visual; Annual service; Hydrotest 5-year
CO2 5 kg	25	TBD	Monthly visual; Annual service; Hydrotest 5-year
Foam 9 L	20	TBD	Monthly visual; Annual service
Hose Reels	20	TBD	Monthly visual; Annual flow test
Hydrants	18	TBD	Quarterly flow test; Annual full-system test
Foam Concentrate	1,000 L	TBD	Annual sample QA
Thermal Imaging Cameras	2	TBD	Quarterly function check
Color Tagging	Green—in service; Red—OOS with defect tag and work order ID		

C.2 Spill/HAZMAT Equipment

Equipment	Minimum	Current	Maintenance
Spill Kits			
Oil	12	TBD	Inspect monthly; Restock after use
Chemical	8	TBD	
Universal Absorbent Pads	30 bales	TBD	
Booms	450 m	TBD	300 m oil-only; 150 m chemical
Drain Covers	20	TBD	
Overpack Drums	12	TBD	
Neutralizers	As needed	TBD	Battery acid, caustic, solvent; SDS stored with kits
Anti-Sparking Tools	2 sets	TBD	

C.3 Detection and Monitoring

Equipment	Minimum	Current	Maintenance
Multi-Gas Meters	8	TBD	Bump test before use/shift; Calibrate quarterly
Refrigerant Detectors	4 portable	TBD	Calibrate per OEM
Fixed Detection	As installed	TBD	Quarterly function test; Annual calibration
Calibration Gases	As needed	TBD	Stock and log expiry dates

C.4 Respiratory/Rescue and Water Safety

Equipment	Minimum	Current	Maintenance
SCBA Sets	8	TBD	Monthly checks; Annual flow test; Spare cylinders 16
Escape Hoods	20	TBD	
Lifebuoys with Lights/Lines	Every 25–50 m	TBD	Monthly inspection
Throw-bags	10	TBD	
Quay Ladders	Every ~50 m	TBD	Quarterly inspection

C.5 Medical

Equipment	Minimum	Current	Maintenance
AEDs	4	TBD	Pads/batteries within expiry; Monthly test
Trauma Kits	8	TBD	
Spine Boards/Stretchers	4	TBD	
Eyewash/Showers	8 stations	TBD	Weekly activation; Annual service

C.6 Power Continuity

Equipment	Minimum	Current	Maintenance
Generators	2 x [kVA TBD]	TBD	Monthly start test; Quarterly load bank; Fuel autonomy ≥ 48 h; Water-in-fuel checks
ATS	As required	TBD	Functional test quarterly; Critical spares: controller and contactors
Reefer Plug Racks	As installed	TBD	Current plug count: TBD; Spare plugs/connectors 20

C.7 Maintenance and CMMS Controls

Activity	Description
Inspections	Entered into CMMS within 24 h; defects assigned with SLA
OOS Equipment	Escalated same day to HSE Manager and IC
Third-party Service	Certificates filed and auditable

Appendix D — Training Matrix and Competency Profiles

D.1 Roles and Mandatory Competencies

Role	Competencies	Refresh
Incident Commander/Deputy IC	ICS 100/200 (IC), ICS 300 (IC/Deputy); Emergency decision-making and dynamic risk assessment; Hot work authorization and gas testing	ICS: 3 years; Others: Annual
ERT Fire	Advanced firefighting (industrial/port); SCBA user; Thermal imaging, foam operations, exposure protection	Firefighting: 2 years; Others: Annual
ERT Spill/HAZMAT	HAZMAT awareness/operations; Spill containment/booming; drain protection; decon; SDS/IMDG interpretation	2 years; Annual
ERT Medical	First Aid/CPR/AED; Trauma management/bleeding control; Heat stress recognition/management	2 years; Annual
ERT Security	Access control/crowd management; Evidence preservation and PFSP interfaces; Bomb threat and suspicious package protocols	2 years; Annual
Technical/Reefer	Electrical safety, LOTO; Refrigerant safety (A1/A2L), gas detection; Emergency power/ATS operations	Annual
Wardens/Marshals	Evacuation leadership/headcount; Assisted evacuation	Annual
Operators	Equipment certification; Banksman/slinging as applicable	1–3 years; 2 years
All Staff and Contractors	Site induction and emergency orientation; Fire extinguisher practical; Spill awareness; Security awareness and social media restrictions	Before access/2 years; Annual

D.2 Drill Cadence (Minimum)

Drill Type	Frequency
Evacuation	Quarterly (include 1 night-shift and 1 no-notice annually)
HAZMAT/refrigerant	Semi-annual (include A2L scenario if applicable)
Full-scale multi-agency	Annual with NPA Fire/Police, LASEMA, marine rescue
Table-top for leadership	Quarterly with injects

D.3 Duty Roster Coverage (Minimum)

Requirement	Minimum
On-shift ERT	Fire 3; HAZMAT 2; Medical 2; Security 2; Technical 1; IC/Deputy reachable ≤ 10 minutes
First aiders per shift	≥ 2 per zone (warehouse, yard/quay, admin)

D.4 Records and KPIs

KPI	Target
Training currency	≥ 95%
Drill participation	≥ 90% of on-duty
Corrective actions closed	≤ 30 days

Appendix G — Chemical and Refrigerant Inventory and SDS Index

G.1 Inventory Fields

Field	Description
Material	Chemical or refrigerant name
UN/IMDG/PG	UN number, IMDG class, Packing Group
CAS	Chemical Abstracts Service number
Storage location	Where material is stored
Max quantity	Maximum quantity allowed
SDS version/date	Safety Data Sheet version and date
OEL TWA/STEL	Occupational Exposure Limit - Time Weighted Average/Short Term Exposure Limit
LFL/UFL	Lower/Upper Flammability Limit
Vapor density	Vapor density relative to air
Water reactivity	Reactivity with water
Detector compatibility	Compatible detection equipment
Primary hazards/PPE	Primary hazards and required PPE
First-aid notes	First-aid procedures
Spill kit required	Required spill kit type
Segregation	Required segregation from other materials
Notification thresholds	Thresholds for regulatory notification

G.2 Example Entries (Replace with Actuals)

Material	Details
Diesel Fuel	UN 1202; IMDG 3; PG III; CAS 68334-30-5; Storage: Fuel tank FT-1 (bunded), Yard West; Max qty: TBD L; SDS date: TBD; OEL: Oil mists 5 mg/m3 TWA; LFL/UFL: ~0.6–7.5% vol; Vapor density: >1; Detector: LEL (catalytic/IR); PPE: Anti-static PPE; nitrile gloves; goggles; Spill kit: Oil-only; booms; drain covers; foam for fire as needed; Segregation: Away from oxidizers
Lubricating Oil	Not regulated as DG (check SDS); Storage: Workshop rack; Max qty: TBD L; OEL: Oil mists 5 mg/m3; Spill kit: Oil-only
Battery Electrolyte	UN 2796; IMDG 8; PG II; CAS 7664-93-9; Storage: Battery room; acid cabinet; bunded; Max qty: TBD L; OEL: 0.2 ppm STEL (check SDS); Detector: Acid gas; PPE: Acid-resistant gloves/apron/face shield; Neutralizer: Sodium bicarbonate; copious water; Segregation: Away from bases/metals; Notification: LASEPA if > TBD L enters environment
Paints/Solvents	UN 1263; IMDG 3; PG II/III (varies); Storage: Paint locker (ventilated/flame-proof); LFL: ~1–1.4%; Controls: No ignition sources; bonding/grounding
Cleaning Chemicals	SDS-driven hazards; segregate from acids; eyewash nearby
Refrigerants	R-134a (A1, non-flammable); Asphyxiant at high conc.; OEL: ~1,000 ppm TWA (check SDS); Storage: in-use and spare cylinders in ventilated cage; Detector: IR; R-404A (A1); OEL: ~1,000 ppm TWA; R-452A (A1); OEL: per SDS; If A2L present (e.g., R-1234yf/ze): mildly flammable; monitor %LFL; ensure ventilation and no ignition sources

G.3 SDS Management

Activity	Description
Master Index	Accessible to staff; SDS at point-of-use; QR codes optional; annual review

G.4 Segregation and Labeling

Requirement	Description
IMDG Segregation	Per class; corrosives away from bases/flammables; oxidizers isolated
GHS Labeling	GHS labeling; secondary containers labeled
Storage Rooms	Ventilated with eyewash/shower nearby

G.5 Environmental Thresholds and Notifications

Requirement	Description
Reportable Quantities	Define with LASEPA/NESREA (confirm with regulators)
Immediate Notification	Phone notification for any release to waterway
Written Reports	Follow statutory written report timelines