




SENSORAY MODEL 2509 Rev E

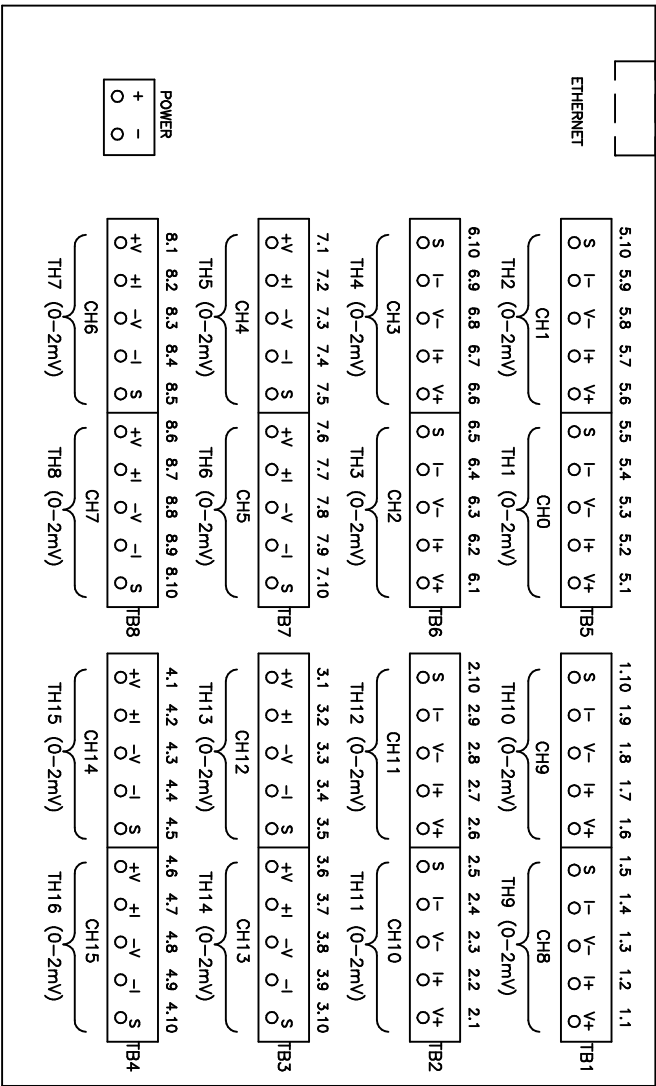


THERMOCOUPLES  
RECOMMENDED CONNECTION




RTDS, RESISTORS AND THERMISTERS  
RECOMMENDED CONNECTION

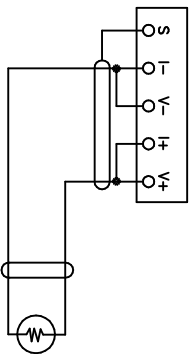

4-20mA CURRENT LOOP CONNECTION

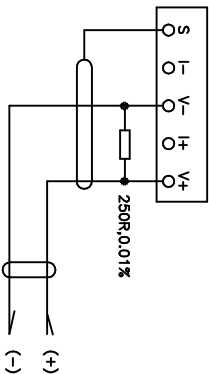

DC VOLTAGE CONNECTION



NOTE : DC VOLTAGE SOURCES SHOULD NEVER BE CONNECTED TO THE L+ OR L- TERMINALS



AEROTECH A.T.E. LTD  
HEATHFIELD, ESSEX

SmAD1 LAYOUT

1	RELEASE	JG	021208
A	PROVISIONAL	JNG	170608
ISSUE	CHANGE	APPRO	DATE

THIS DRAWING IS SUBJECT TO COPYRIGHT. IT MUST NOT BE COPIED, REPRODUCED, OR OTHERWISE MADE USE OF WITHOUT THE WRITTEN PERMISSION OF AEROTECH A.T.E. LIMITED.

DRAWN BY	JG	APPR'D	CHK'D	DWG. No.	26026/057/02	SHEET 1 OF 1
ISSUE	A					A2