




SENSORAY MODEL 2509 Rev E

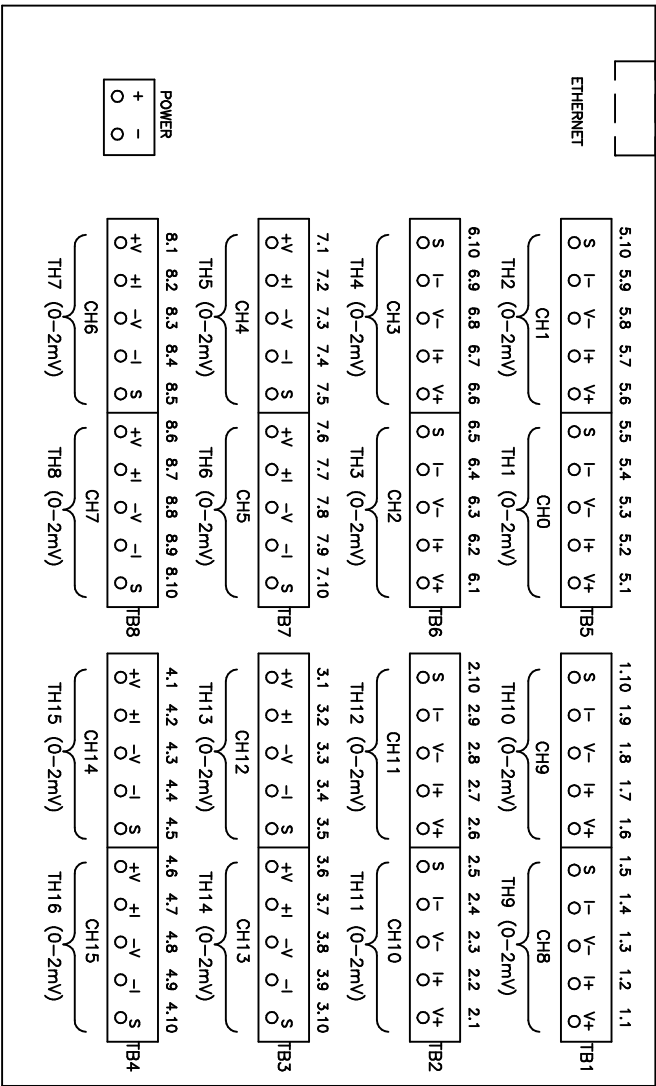


THERMOCOUPLES  
RECOMMENDED CONNECTION




RTDS, RESISTORS AND THERMISTERS  
RECOMMENDED CONNECTION  
TWO-WIRE CONNECTION

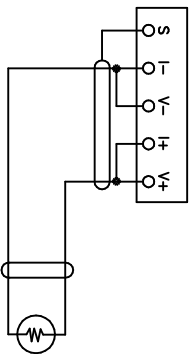

4-20mA CURRENT LOOP CONNECTION

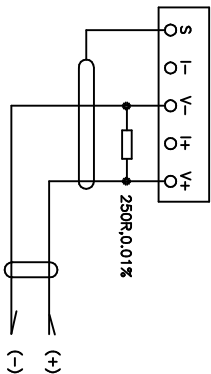

DC VOLTAGE CONNECTION



NOTE : DC VOLTAGE SOURCES SHOULD NEVER BE  
CONNECTED TO THE L+ OR L- TERMINALS

1	RELEASE	JG	021208
A	PROVISIONAL	JNG	170608
ISSUE	CHANGE	APPRO	DATE

THIS DRAWING IS SUBJECT TO COPYRIGHT. IT MUST NOT BE COPIED, REPRODUCED, OR OTHERWISE MADE USE OF WITHOUT THE WRITTEN PERMISSION OF AEROTECH A.L.E. LIMITED.

DRAWN BY	JG	APPR'D	DJC	CHK'D	DJR	DWG. No.	26026/056/04	SHEET 1 OF 1
						ISSUE	1	A2