


FMUSER FUQ-100 Network Encoder Processor 12-Channel Input HDMI-SDI to IP HEVC-H.265 H.264 Encoding Modular Encoder for Broadcast Streaming

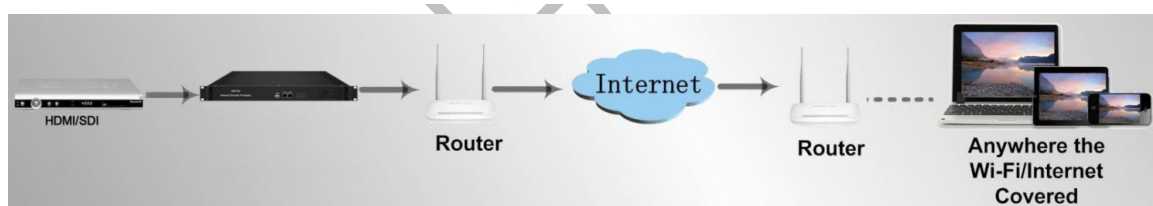

Product overview

The FMUSER FUQ-100 Network Encoder Processor converts HDMI or SDI inputs into IP streams for distribution. It encodes signals using HEVC/H.265 or H.264 standards. The compact 1U chassis features three slots for flexible modules. Ideal for broadcasting and streaming applications over LAN or internet. This 1-U chassis comes with 3 slots which allow loading different encoder modules with different interfaces and video formats.


Key feature

Modular 1U chassis with three slots supporting up to 12 HD inputs. Supports HDMI and SDI inputs with HEVC/H.265 or H.264 encoding. IP output via UDP, RTP, RTSP, RTMP, HTTP, HLS with 180Mbps throughput. Web-based management and USB upgrade for control.

Encoder Module Specifications

4 HDMI/SDI Encoding Module (DX224H/HV)



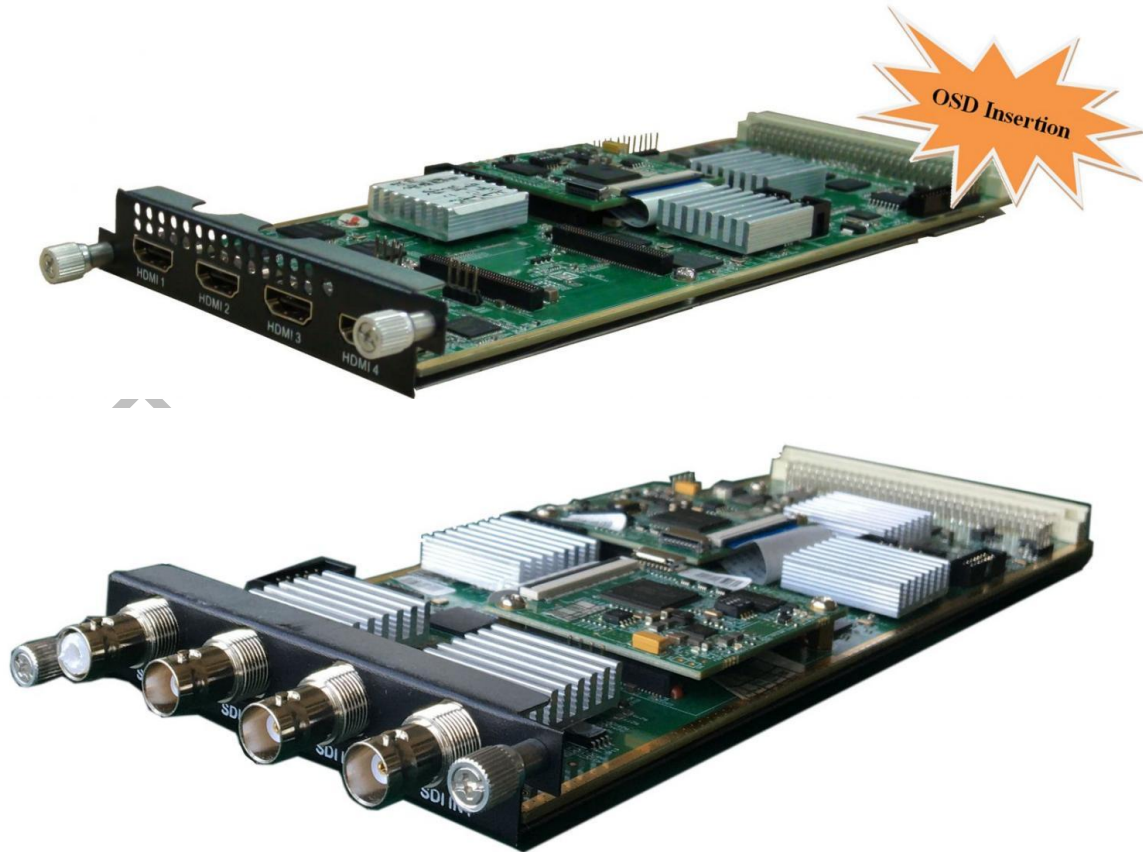

Module Specifications:

Input: 4×HDMI (1.4) input, HDCP 1.4, or 4×SDI input

Video Encoding:

Video format: HEVC/H.265 & MPEG 4 AVC/H.264

Resolution:

DX224HV	Input	Output	Output
DX224HV	Input	HEVC/H.265	MPEG-4 AVC/H.264
DX224HV	4*1080P-50	4*1080P-50	4*1080P-25 2*1080P-50
DX224HV	4*1080P-60/59.94	4*1080P-60, 4*1080P-59.94	4*1080P-30 4*1080P-29.97 2*1080P-60 2*1080P-59.94
DX224HV	4*1080I-50	4*1080P-50, 4*1080P-25	4*1080I-50 4*1080P-25 2*1080P-50
DX224HV	4*1080I-60/59.94	4*1080P-60, 4*1080P-30	4*1080I-60 4*1080P-30 2*1080P-60

DX224HV	4*720P-50	4*720P-50	4*720P-50
DX224HV	4*720P-60/59.94	4*720P-60, 4*720P-59.94	4*720P-60 4*720P-59.94
DX224H	Input	Output	Output
DX224H	Input	HEVC/H.265	MPEG-4 AVC/H.264
DX224H	4*1080P-50	4*1080P-50	4*1080P-50
DX224H	4*1080P-60/59.94	4*1080P-60, 4*1080P-59.94	4*1080P-60 4*1080P-59.94
DX224H	4*1080I-50	4*1080P-50, 4*1080P-25	4*1080P-25 4*1080P-50 4*1080I-50
DX224H	4*1080I-60/59.94	4*1080P-60, 4*1080P-30	4*1080P-30 4*1080P-60 4*1080I-60
DX224H	4*720P-50	4*720P-50	4*720P-50
DX224H	4*720P-60/59.94	4*720P-60, 4*720P-59.94	4*720P-60 4*720P-59.94

Chroma: 4:2:0

Bit rate (each channel): 0.5Mbps~20Mbps (H.265), 4 Mbps~20Mbps (H.264)

Rate Control: CBR/VBR

GOP structure: IBBP, IPPP

Audio Encoding:

Audio format: MPEG-1 Layer 2, LC-AAC, HE-AAC, HE-AAC V2, AC3 Passthrough

Sampling rate: 48KHz

Bit-rate (each channel):

48Kbps~384Kbps (MPEG-1 Layer 2 & LC-AAC)

24 Kbps~128 Kbps (HE-AAC)

18 Kbps~56 Kbps (HE-AAC V2)

Audio Gain: 0~255

Support Logo, QR Code insertion--Optional as per order

System Diagram Illustration:



UDP (SPTS), RTP, RTSP, RTMP, HTTP, HLS (Unicast/Multicast)
Transfer through internet/LAN

Equipment Specifications:

Dimension(W×L×H): 440mm×324mm×44mm
Approx weight: 6kg
Environment: 0~45℃(work); -20~80℃(Storage)
Power requirements: AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email: sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/+8613922702227)