

FMUSER FUQ-2500E Agile Modulator 1×CVBS Video 1×L-R Audio Input 1×RF Output PAL-NTSC-SECAM Standards Configurable RF 47-870MHz Hotel Community Entertainment Product overview




The FMUSER FUQ-2500E Agile Modulator offers RF modulation with 1 audio (L/R) and 1 video (CVBS) input, plus configurable RF output. It processes signals using video input AGC for stability. This unit features a 19-inch 1U rack-mount design and keyboard/LCD operation with online upgrade. Ideal for hotels, communities, and entertainment venues.

Key feature

- Supports 1 audio (L/R) and 1 video (CVBS) input for versatile connectivity.
- Configurable RF output (47-870MHz) with test port and $\pm 5\text{kHz}$ accuracy.
- Features video input AGC and compatibility with PAL B/G, PAL D/K, NTSC, SECAM standards.
- Enables keyboard and LCD operation with online upgrade capability.
- Integrates 19-inch 1U rack-mount design for easy installation.

Principle Chart

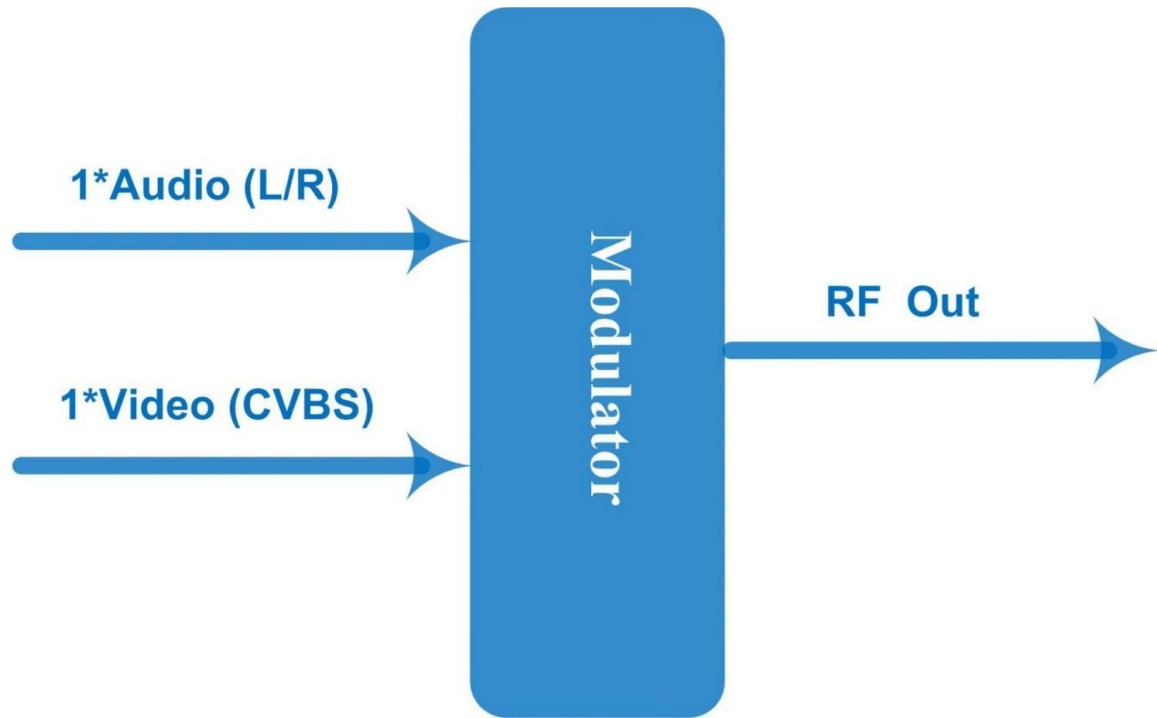

Specifications

Input	1* audio (L/R) input and 1*video (CVBS)	1* audio (L/R) input and 1*video (CVBS)	1* audio (L/R) input and 1*video (CVBS)
Video	A/V ration	A/V ration	-10~-20dB
Video	Input level	Input level	1VPP
Video	Video clamping capacity	Video clamping capacity	≥26dB
Video	Color / light delay difference	Color / light delay difference	≤45nS
Video	Differential gain	Differential gain	≤2% (Modulation 87.5%)
Video	Differential phase	Differential phase	≤2° (Modulation 87.5%)
Video	SNR	SNR	≥50dB
Video	Image carrier drift	Image carrier drift	≤5kHz
Video	2T-K impulse ratio	2T-K impulse ratio	≤4%
Video	Flatness in band	Flatness in band	≤1dB
Audio	Pre-emphasis of audio	Pre-emphasis of audio	50μs
Audio	Input level	Input level	0.7V
Audio	SNR	SNR	≥60dB

Audio	Flatness in band	Flatness in band	≤1dB
Audio	Distortion degree	Distortion degree	≤0.5%
Audio	Audio modulation frequency offset	Audio modulation frequency offset	± 50kHz
Audio	V/A interval	V/A interval	According to TV System standard
RF Output	Interface	Interface	1 F typed output port, 75Ω
RF Output	Frequency range	Frequency range	47~870MHz, 1kHz step
RF Output	TV system standard	TV system standard	PAL B/G, PAL D/K, NTSC, SECAM
RF Output	Output return loss	Output return loss	≥14dB
RF Output	Output level	Output level	≥113dBμV
RF Output	Output level adjustable range	Output level adjustable range	0~16dB
RF Output	Error of video/audio carrier interval	Error of video/audio carrier interval	≤5 kHz
RF Output	Carrier to noise ratio (C/N)	Carrier to noise ratio (C/N)	≥62dB
RF Output	Output suppression	Output suppression	≥60dB (≥130dBuV testing)
RF Output	Flatness in band	Flatness in band	≤1dB
RF Output	Frequency accuracy	Frequency accuracy	≤5kHz
RF Output	Adjacent Frequency suppression	Adjacent Frequency suppression	≥45dB
System function	Keyboard and LCD operation	Keyboard and LCD operation	Keyboard and LCD operation
System function	Multiple languages	Multiple languages	Multiple languages
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	482*256*44mm	482*256*44mm
Miscellaneous	Environment	-10~45■(work); -20~80■ (storage■	-10~45■(work); -20~80■ (storage■
Miscellaneous	Power requirements	AC 90-264V, 50Hz	AC 90-264V, 50Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227