

**FMUSER FUQ-3214B Professional Encoder 4 CVBS Inputs
MPEG-2 PAL-NTSC SD Video Encoding IP Output UDP-RTP
MPTS-SPTS for CATV Satellite Terrestrial TV Headends**



Product Overview


The FMUSER FUQ-3214B is a multi-channel SD encoder and multiplexer with 4 CVBS inputs and IP output via UDP/RTP. It encodes video in MPEG-2 format and audio in MPEG-1 Layer 2 or DD AC3 (2.0), then multiplexes signals into MPTS or SPTS streams. Controlled via a web-based interface for real-time monitoring. Ideal for CATV, satellite, and terrestrial digital TV systems.

Key feature

- Supports 4 CVBS inputs with MPEG-2 video encoding for PAL/NTSC SD formats.

- Provides dual audio encoding: MPEG-1 Layer 2 and DD AC3 (2.0) at 48kHz sampling.
- Delivers multiplexed IP output via UDP/RTP for MPTS and SPTS streams.
- Includes broadcast enhancements like Null PKT Filter, CC, and logo insertion.
- Features web-based control for real-time monitoring and updates.

Principle Chart

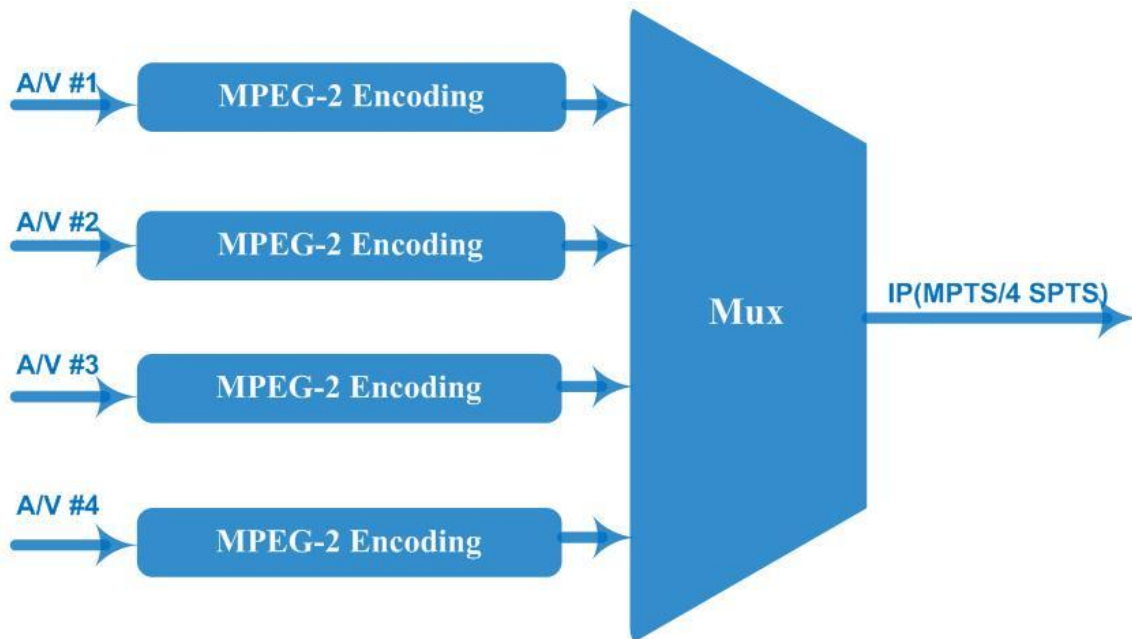

Technical Specification

Input	4 CVBS inputs , RCA interface	4 CVBS inputs , RCA interface	4 CVBS inputs , RCA interface	4 CVBS inputs , RCA interface
Video	Resolution	Input	Input	Output
Video	Resolution	720*576	720*576	720×576_50i, 704×576_50i, 640×576_50i, 352×288_50i, 320×288_50i, 17 6×288_50i,176×1 44_50i
Video	Resolution	720*480	720*480	720×480_60i, 544×480_60i, 352×480_60i, 352×240_60i, 320×240_60i, 176×240_60i, 176×120_60i,

Video	Encoding	MPEG-2	MPEG-2	MPEG-2
Video	Bit-rate	0.5Mbps~8Mbps per channel	0.5Mbps~8Mbps per channel	0.5Mbps~8Mbps per channel
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	GOP_0_B, 1B, 2B,3B	GOP_0_B, 1B, 2B,3B	GOP_0_B, 1B, 2B,3B
Video	Aspect Ratio	4:3; 16:9	4:3; 16:9	4:3; 16:9
Audio	Encoding	MPEG-1 Layer 2, DD AC3 (2.0)	MPEG-1 Layer 2, DD AC3 (2.0)	MPEG-1 Layer 2, DD AC3 (2.0)
Audio	Sampling rate	48KHz	48KHz	48KHz
Audio	Resolution	24-bit	24-bit	24-bit
Audio	Audio Gain	-12~+40 adjustable	-12~+40 adjustable	-12~+40 adjustable
Audio	Bit-rate	64Kbps, 128Kbps, 192kbps, 256kbps, 320kbps, 384kbps each channel	64Kbps, 128Kbps, 192kbps, 256kbps, 320kbps, 384kbps each channel	64Kbps, 128Kbps, 192kbps, 256kbps, 320kbps, 384kbps each channel
Stream output	IP (1*MPTS and 4*SPTS) output over UDP and RTP, 1000 Base-T Ethernet interface (multicast)	IP (1*MPTS and 4*SPTS) output over UDP and RTP, 1000 Base-T Ethernet interface (multicast)	IP (1*MPTS and 4*SPTS) output over UDP and RTP, 1000 Base-T Ethernet interface (multicast)	IP (1*MPTS and 4*SPTS) output over UDP and RTP, 1000 Base-T Ethernet interface (multicast)
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	Dimension(W×L×H)	482mm×328mm×44mm	482mm×328mm×44mm
Miscellaneous	Approx weight	Approx weight	5kg	5kg
Miscellaneous	Environment	Environment	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■

Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz
---------------	--------------------	--------------------	--	--

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227