

**FMUSER FUQ-3214C Multi-Channel SD Encoder 4-8-12 CVBS-SDI
Input to IP Output MPEG-2 H.264 Encoding Web-Based Control
CATV Headend Broadcast**




OSD (Logo/PPT/Caption/QR Code) Insertion





OSD Insertion Standard

- ◆ **Customization:** Showing time & Displaying effect
- ◆ **Easy operation:** fresh man learn it in few minutes

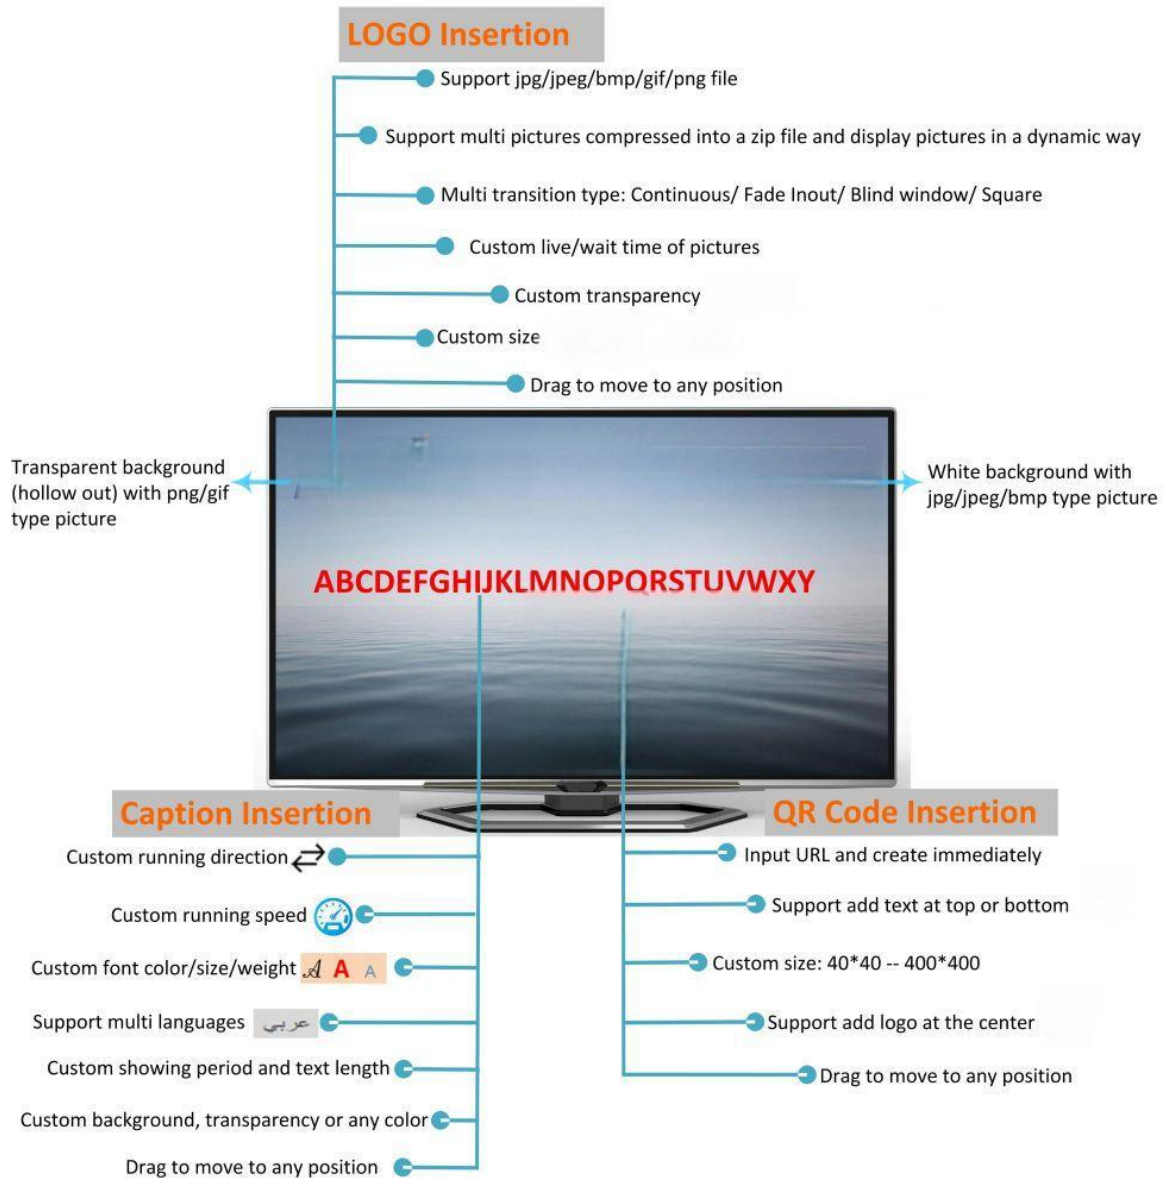

Product Overview


The FMUSER FUQ-3214C is a multi-channel SD encoder supporting 4/8/12 CVBS or SDI inputs with MPEG-2 and H.264 encoding. It processes signals by encoding and multiplexing to TS for IP output. This modular device fits in a 1U chassis with up to three independent modules, controlled via a web-based interface. Ideal for CATV digital headends and broadcast distribution systems.

Key feature

The FMUSER FUQ-3214C is a multi-channel SD encoder supporting 4/8/12 CVBS or SDI inputs with MPEG-2 and H.264 encoding. It processes signals by encoding and multiplexing to TS for IP output. This modular

device fits in a 1U chassis with up to three independent modules, controlled via a web-based interface. Ideal for CATV digital headends and broadcast distribution systems.

Principle Chart (per daughter module)

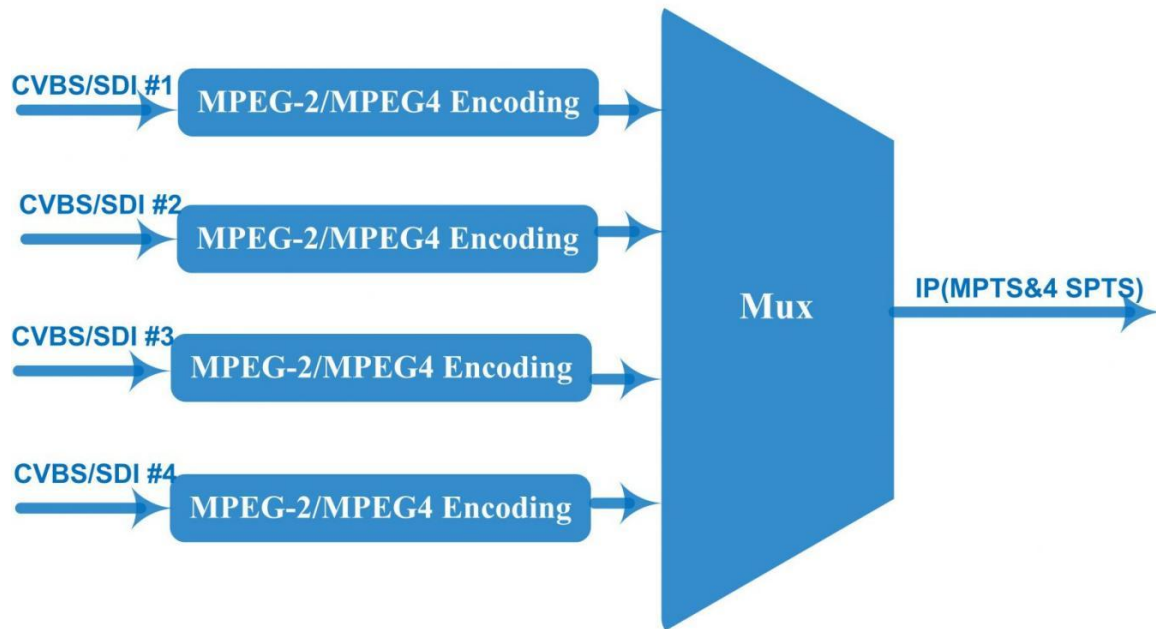

Technical Specification

Input	4/8/12 CVBS input , DB15-To-RCA interface ---Option■ 4/8/12 SDI input, BNC interface ---Option■	4/8/12 CVBS input , DB15-To-RCA interface ---Option■ 4/8/12 SDI input, BNC interface ---Option■	4/8/12 CVBS input , DB15-To-RCA interface ---Option■ 4/8/12 SDI input, BNC interface ---Option■	4/8/12 CVBS input , DB15-To-RCA interface ---Option■ 4/8/12 SDI input, BNC interface ---Option■
Video	Resolution	Input	Input	Output
Video	Resolution	720*576 @50i	720*576 @50i	720*576/352*288 /320*240/320*180/176*144 /160*120/160*90@50Hz
Video	Resolution	720*480 @60i	720*480 @60i	720*480/352*288 /320*240/320*180/176*144 /160*120/160*90@60Hz

Video	Encoding format	MPEG-2, MPEG4 AVC/H.264	MPEG-2, MPEG4 AVC/H.264	MPEG-2, MPEG4 AVC/H.264
Video	Bit-rate	0.5~5Mbps	0.5~5Mbps	0.5~5Mbps
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	IPPP, IBPBP, IBBPB, IBBBP	IPPP, IBPBP, IBBPB, IBBBP	IPPP, IBPBP, IBBPB, IBBBP
Video	Aspect Ratio	4:3, 16:9	4:3, 16:9	4:3, 16:9
Audio	Encoding format	MPEG1 Layer 2, LC-AAC, HE-AAC	MPEG1 Layer 2, LC-AAC, HE-AAC	MPEG1 Layer 2, LC-AAC, HE-AAC
Audio	Sampling rate	48KHz	48KHz	48KHz
Audio	Bits per sample	32-bit	32-bit	32-bit
Audio	Audio Gain	-20~+12 adjustable	-20~+12 adjustable	-20~+12 adjustable
Audio	Bit-rate	48Kbps~384Kbps (each channel)	48Kbps~384Kbps (each channel)	48Kbps~384Kbps (each channel)
Stream output	IP (1*MPTS and 4*SPTS) output over UDP and RTP/RTSP (unicast/multicast) per module, 100M/1000M self-adaption	IP (1*MPTS and 4*SPTS) output over UDP and RTP/RTSP (unicast/multicast) per module, 100M/1000M self-adaption	IP (1*MPTS and 4*SPTS) output over UDP and RTP/RTSP (unicast/multicast) per module, 100M/1000M self-adaption	IP (1*MPTS and 4*SPTS) output over UDP and RTP/RTSP (unicast/multicast) per module, 100M/1000M self-adaption
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L× H)	Dimension(W×L× H)	482mm×328mm ×44mm	482mm×328mm ×44mm
Miscellaneous	Environment	Environment	0~45℃(work)■-20~80℃■Storage ■	0~45℃(work)■-20~80℃■Storage ■

Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz
---------------	--------------------	--------------------	--	--

Technical Comparison

	FU-4339A	DX3214B-4/8/12
Chipset	Magnum	Magnum
Input interface	8× CVBS, BNC	4/8/12× CVBS Optional, RCA interface 4/8/12×SD-SDI , BNC interface (Modular design with each module supporting 4 channels, one chassis supporting up to 3 modules)
Input interface	8×SD-SDI input with embedded audio	4/8/12× CVBS Optional, RCA interface 4/8/12×SD-SDI , BNC interface (Modular design with each module supporting 4 channels, one chassis supporting up to 3 modules)
Bitrate	0.25~15Mbps for H.264 encoding 0.5~15Mbps for MPEG-2 encoding	0.5~5Mbps for both H.264 and MPEG-2 encoding
ASI In&Mux	1 ASI IN	N/A
ASI Output	2*ASI mirrored Output	N/A
IP Output	8 SPTS or 1 MPTS output over UDP (unicast / multicast) 10/100Base-T Ethernet interface * 1 one data port for all channels	4 SPTS and 1 MPTS output over UDP and RTP/RTSP for each module (unicast/multicast) 1000 Base-T Ethernet interface*1/2/3 one data port for one module (4 channels)
OSD insertion	N/A	Support logo/caption/QR Code insertion
Operation	Web-based NMS SNMP (Optional) Front panel with LCD+Key board	Web-based NMS
Control Mode	One NMS port for all channels	One NMS port for each module (4 channels)

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227