
**FMUSER FUQ-3504 IP Multiplexer 4 ASI Bidirectional Inputs-Outputs 768 UDP-RTP
IP Inputs 4 MPTS UDP-RTP Outputs PID Re-mapping PSI-SI Auto-Generation for
CATV Headend Product Overview**




The FUQ-3504 IP Multiplexer provides high-density MPTS multiplexing with 4 bidirectional ASI inputs and 768 IP streams via UDP/RTP, outputting to 4 MPTS streams. It processes signals through PID remapping, PCR adjustment, and PSI/SI auto-generation. Controlled via web-based NMS over a dedicated 10/100M port, this 1RU rack-mountable unit is designed for digital broadcast headends and CATV systems.

Key feature

- Supports 4 bidirectional ASI ports and 768 IP inputs via UDP/RTP.
- Performs PID remapping, PCR adjustment, and PSI/SI auto-generation.
- Includes large buffer memory to prevent overflow and bypass output capability.
- Features web-based NMS for centralized monitoring and control.

Principle Chart

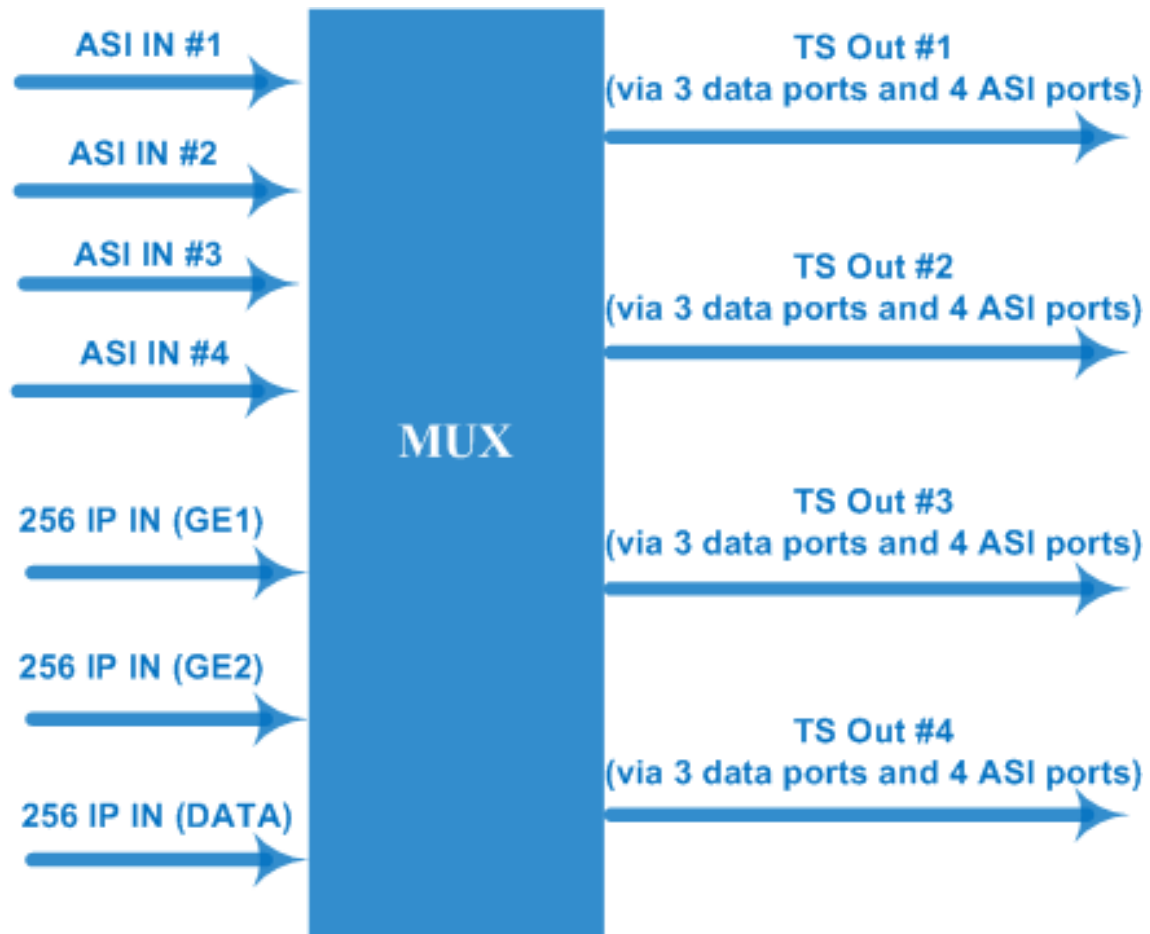

ASI direction can be defined as input or output manually

Specifications

Input / Output	4 bi-direction ASI ports: max 4 ASI input/output, BNC 75Ω 3 bi-direction Data ports (RJ45) 768 IP inputs over UDP/RTP (256 IP inputs thru GE1, GE2 and DATA port respectively) 4 MPTS outputs over UDP/RTP thru GE1, GE2 and DATA port 100/1000Mbps self-adaption for all data ports	4 bi-direction ASI ports: max 4 ASI input/output, BNC 75Ω 3 bi-direction Data ports (RJ45) 768 IP inputs over UDP/RTP (256 IP inputs thru GE1, GE2 and DATA port respectively) 4 MPTS outputs over UDP/RTP thru GE1, GE2 and DATA port 100/1000Mbps self-adaption for all data ports
Input / Output	Packet format	204/188 self-adaption for input, 204/188 is settable for output
Input / Output	Output TS Mode	bytes/packets
Re-multiplex	Max PID numbers	748 PID numbers for GE1
Re-multiplex	Max PID numbers	748 PID numbers for GE 2

Re-multiplex	Max PID numbers	748 PID numbers for DATA port and 4 ASI ports together
Re-multiplex	Functions	PID re-mapping
Re-multiplex	Functions	PCR accurate adjusting
Re-multiplex	Functions	Automatic generating PSI/SI table
Re-multiplex	PID transparent	PID transparent and mapping achievable
System	Web management:10/100M NMS port	Web management:10/100M NMS port
System	Language: English and Chinese	Language: English and Chinese
System	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	482mm×300mm×44mm (W×L×H)
General	Weight	3.5kg
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power supply	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz
General	Consumption	≤40W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)