
FMUSER FUQ-3504 IP Multiplexer 4 ASI I-O 768 UDP-RTP Inputs 4 MPTS UDP-RTP Outputs Web-Based NMS Management CATV Broadcasting [Product Overview](#)



The FUQ-3504 IP Multiplexer integrates 4 ASI and 768 IP inputs, multiplexing them into 4 MPTS outputs. It processes signals with PSI/SI auto-generation, PID remapping, and PCR adjustment. Managed via web-based NMS through a 10/100M Ethernet port. Ideal for CATV broadcasting and digital TV head-end systems.

Key feature

Supports 4 bi-directional ASI ports with manual direction control.


Features 768 UDP/RTP inputs via GE1, GE2, and DATA ports.

Delivers 4 MPTS outputs through GE1, GE2, and DATA ports.

Enables PCR adjustment, PID filtering/remapping, and PSI/SI editing.

Provides web-based NMS management via 10/100M Ethernet port.

Principle Chart

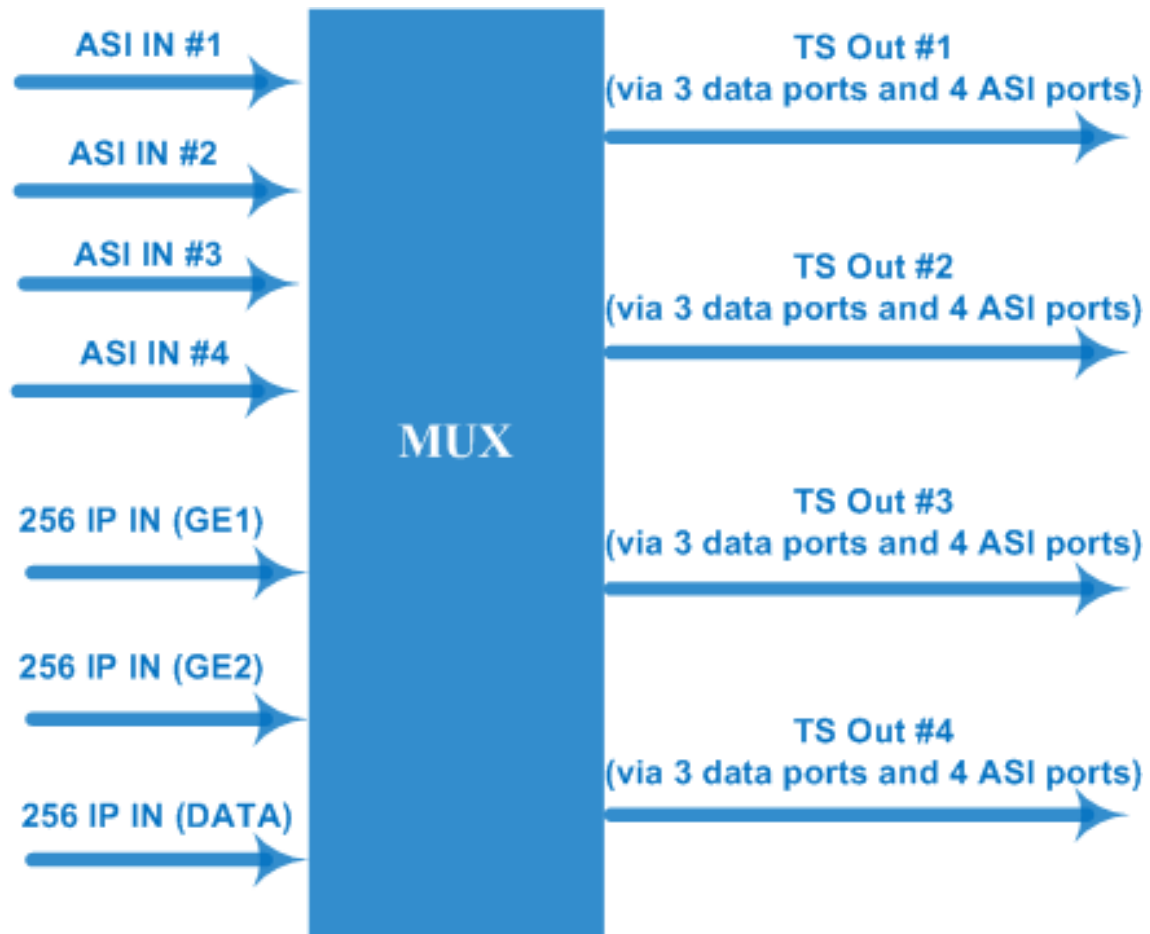

ASI direction can be defined as input or output manually

Specifications

Input / Output	4 bi-direction ASI ports: max 4 ASI input/output, BNC 75Ω 3 bi-direction Data ports (RJ45) 768 IP inputs over UDP/RTP (256 IP inputs thru GE1, GE2 and DATA port respectively) 4 MPTS outputs over UDP/RTP thru GE1, GE2 and DATA port 100/1000Mbps self-adaption for all data ports	4 bi-direction ASI ports: max 4 ASI input/output, BNC 75Ω 3 bi-direction Data ports (RJ45) 768 IP inputs over UDP/RTP (256 IP inputs thru GE1, GE2 and DATA port respectively) 4 MPTS outputs over UDP/RTP thru GE1, GE2 and DATA port 100/1000Mbps self-adaption for all data ports
Input / Output	Packet format	204/188 self-adaption for input, 204/188 is settable for output
Input / Output	Output TS Mode	bytes/packets
Re-multiplex	Max PID numbers	748 PID numbers for GE1
Re-multiplex	Max PID numbers	748 PID numbers for GE 2

Re-multiplex	Max PID numbers	748 PID numbers for DATA port and 4 ASI ports together
Re-multiplex	Functions	PID re-mapping
Re-multiplex	Functions	PCR accurate adjusting
Re-multiplex	Functions	Automatic generating PSI/SI table
Re-multiplex	PID transparent	PID transparent and mapping achievable
System	Web management:10/100M NMS port	Web management:10/100M NMS port
System	Language: English and Chinese	Language: English and Chinese
System	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	482mm×300mm×44mm (W×L×H)
General	Weight	3.5kg
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power supply	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz
General	Consumption	≤40W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)