

FMUSER FUQ-3512B DVB-T Modulator 2 ASI 2 IP Input RF Output EN300744 QPSK-16QAM-64QAM DPD SFN-MFN Network Web Management TV Broadcasting Product overview



The FMUSER FUQ-3512A DVB-T Modulator provides DVB-T (EN300744) compliant modulation with RF output. It processes signals for digital transmission and features web-based management for control. Ideal for MFN and SFN digital TV networks.

Key feature

Supports DVB-T (EN300744) compliance for reliable broadcasting.

Features SFN and MFN network operation flexibility.

Delivers MER ≥ 42 dB with superior phase noise performance.

Provides RF output at 50-1000MHz with 1Hz tuning precision.


Includes adaptive non-linear digital pre-distortion (DPD) for efficiency optimization.

Specifications

Input	2channels ASI input& 2 IP input, can only select 1 input as source, but all 4 inputs ports are hot backup IP with UDP/RTP protocol, with Multicast/Unicast IP with PCR adjust feature also	2channels ASI input& 2 IP input, can only select 1 input as source, but all 4 inputs ports are hot backup IP with UDP/RTP protocol, with Multicast/Unicast IP with PCR adjust feature also
Input	GPS 10Mhz reference clock input, BNC port	GPS 10Mhz reference clock input, BNC port
Input	GPS 1PPS input, BNC port	GPS 1PPS input, BNC port
Input	1 RF input for DPD -25dbm~+5dbm	1 RF input for DPD -25dbm~+5dbm
Modulation	Standard	EN300 744

Modulation	FFT	2K, 8K
Modulation	Bandwidth	5M, 6M, 7M, 8M
Modulation	Constellation	QPSK, 16QAM, 64QAM
Modulation	Guard interval	1/4, 1/8, 1/16, 1/32
Modulation	FEC	1/2, 2/3, 3/4, 5/6, 7/8
RF output	Interface	N type, 50Ω impedance
RF output		
RF output	RF range	50~1000MHz ■ 1Hz step
RF output	RF output level	-15dbm~+5dbm, 0.1db step
RF output	RF level offset	-3dbm~+3dbm, 0.1db step
RF output	MER	≥ 42db
ASI output	2 ASI ports output for the passthrough of the input ASI Signal, both ASI out are the same	2 ASI ports output for the passthrough of the input ASI Signal, both ASI out are the same
Non-linear DPD	over 10db ACPR improvement (normally)	over 10db ACPR improvement (normally)
System	LCD display & keyboard operation, web management	LCD display & keyboard operation, web management
System	Software upgrading through NMS port	Software upgrading through NMS port
General	Demission (W*L*H)	440mm×414mm×44.5mm
General	Weight	4.9kg
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power Supply	AC 110V±10%, 50/60Hz or AC 220V±10%, 50/60Hz
General	Power Consumption	To be tested

Principle Chart

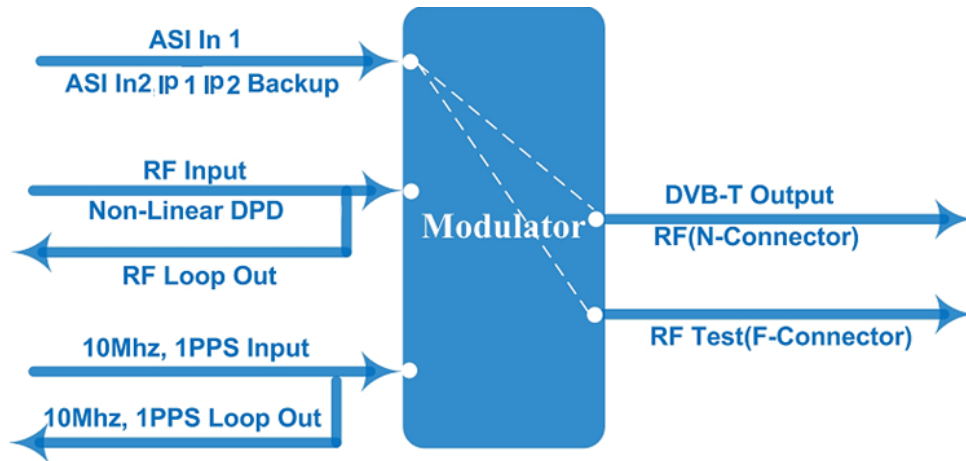

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)