
FMUSER FUQ-3514 Multiplexer Scrambler 4 ASI I-O 128 IP Inputs 4 MPTS Outputs
ASI-IP Interfaces ETR289 ETSI 101-197 ETSI 103-197 Scrambling CATV IPTV
Headend Product Overview



The FUQ-3514 Multiplexer Scrambler provides multiplexing and scrambling functions with 4 ASI inputs, 128 IP inputs, and 4 MPTS outputs. It processes signals through PSI/SI auto-generation, PID re-mapping, service filtering, and PCR adjusting. Managed via web-based NMS, this device is ideal for CATV broadcasting systems, ensuring efficient integration and reliable performance.

Key feature


Supports up to 4 ASI inputs/outputs and 128 IP inputs with 4 MPTS outputs.

Enables scrambling compliant with ETR289, ETSI 101 197, and ETSI 103 197, supporting up to 4 simulcrypt CAs.

Allows PID management including filtering, re-mapping up to 512 PIDs per channel, and PSI/SI rebuilding.

Features PCR adjusting, buffer memory for overflow protection, alarming function, and web-based NMS management.

Inner Principle Chart

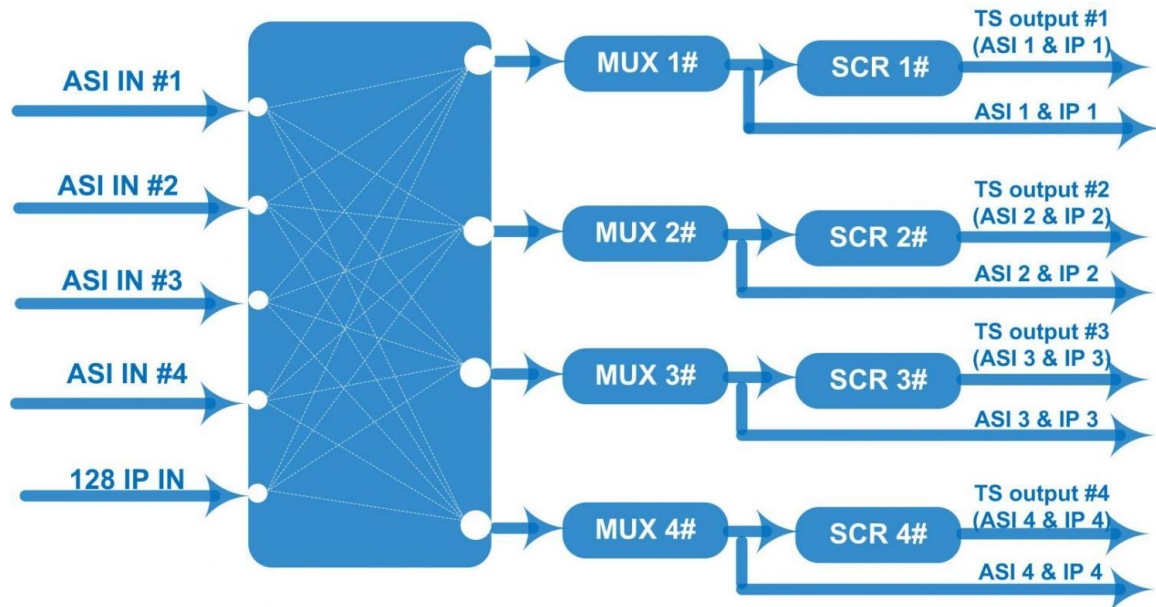

ASI direction can be defined as input or output

Specifications

Input / Output	4 bi-direction ASI ports: max 4 ASI input/output, BNC 75Ω 3 bi-direction Data ports (RJ45): 128 IP input over UDP/RTP 4 IP (MPTS) output over UDP/RTP/RTSP 100/1000Mbps self-adaption	4 bi-direction ASI ports: max 4 ASI input/output, BNC 75Ω 3 bi-direction Data ports (RJ45): 128 IP input over UDP/RTP 4 IP (MPTS) output over UDP/RTP/RTSP 100/1000Mbps self-adaption	4 bi-direction ASI ports: max 4 ASI input/output, BNC 75Ω 3 bi-direction Data ports (RJ45): 128 IP input over UDP/RTP 4 IP (MPTS) output over UDP/RTP/RTSP 100/1000Mbps self-adaption
Input / Output	Input Packet format: 204/188 self-adaption	Input Packet format: 204/188 self-adaption	Input Packet format: 204/188 self-adaption
Input / Output	ASI: Max output bit-rate: 200Mbps (Each channel)	ASI: Max output bit-rate: 200Mbps (Each channel)	ASI: Max output bit-rate: 200Mbps (Each channel)
Mux	Max PIDs	Max PIDs	512 per channel
Mux	Functions	Functions	PID re-mapping
Mux	Functions	Functions	PCR accurate adjusting
Mux	Functions	Functions	Automatic generating PSI/SI table

Mux	PID transparent	PID transparent	Any PID transparent and mapping achievable
Scrambling Parameters	Max simulcrypt CA	Max simulcrypt CA	4
Scrambling Parameters	Scramble Standard	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197
Scrambling Parameters	Scramble Channel	Scramble Channel	1
Scrambling Parameters	Connection	Connection	Local/remote connection
System	Web-based management	Web-based management	Web-based management
System	Language: English and Chinese	Language: English and Chinese	Language: English and Chinese
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	482mm×300mm×44mm (W×L×H)	482mm×300mm×44mm (W×L×H)
General	Weight	3.5kg	3.5kg
General	Temperature	0~45■(operation), -20~80■(storage)	0~45■(operation), -20~80■(storage)
General	Power supply	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz
General	Consumption	≤40W	≤40W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](tel:+8613922702227)