

FMUSER FUQ-3516R ISDB-T Modulator Dual ASI-Dual IP Inputs ARIB STD-B31 6MHz Bandwidth Network Control SFN-MFN Broadcasting STB Testing Product overview



The FMUSER FUQ-3516R ISDB-T Modulator delivers terrestrial digital television broadcasting, featuring dual ASI and dual IP inputs. It modulates signals compliant with ARIB STD-B31 standards, supporting single frequency network (SFN) and multi-frequency network (MFN). With network-based control via WEB interface, LCD, and keyboard, it enables easy management. Ideal for broadcasting network setup and set-top box testing in South American markets like Brazil and Argentina.

Key feature

Enables network control via WEB, LCD, and keyboard for easy upgrades.


Specifications

Input	2 ASI ports input, one for hot backup, BNC interface	2 ASI ports input, one for hot backup, BNC interface	2 ASI ports input, one for hot backup, BNC interface
Input	Dual IP input ports over UDP/RTP, Unicast/Multicast, GE ports	Dual IP input ports over UDP/RTP, Unicast/Multicast, GE ports	Dual IP input ports over UDP/RTP, Unicast/Multicast, GE ports
Input	1 channel 10MHz reference clock input	1 channel 10MHz reference clock input	1 channel 10MHz reference clock input
Input	1 RF input for DPD -15.2dbm~+5dbm	1 RF input for DPD -15.2dbm~+5dbm	1 RF input for DPD -15.2dbm~+5dbm
Modulation	Standard	Standard	ARIB STD-B31
Modulation	Mode	Mode	mode 1(2k), mode 2(4k), mode 3(8k)

Modulation	Constellation	Constellation	DQPSK, QPSK, 16QAM, 64QAM
Modulation	External coding	External coding	RS (204■188)
Modulation	Internal coding	Internal coding	Convolution (1/2, 2/3, 3/4, 5/6, 7/8)
Modulation	Guard interval	Guard interval	1/4, 1/8, 1/16, 1/32
Modulation	Hierarchy mode	Hierarchy mode	A■A+B■A+B+C
Modulation	Time domain interlacing	Time domain interlacing	mode 1: 0, 4, 8, 16 mode 2: 0, 2, 4, 8 mode 3: 0, 1, 2, 4
Modulation	Bandwidth	Bandwidth	6MHz
RF Out	Connector	Connector	N Type, 50ΩImpedance
RF Out	RF range	RF range	50~999Mhz■1Hz step
RF Out	Output level ATT	Output level ATT	-20dbm~+5dbm■0.1db step
RF Out	MER	MER	≥ 42db
Non-linear DPD	over 10db ACPR improvement (normally)	over 10db ACPR improvement (normally)	over 10db ACPR improvement (normally)
linear DPD	over 10db non-flatness adjustment(normally)	over 10db non-flatness adjustment(normally)	over 10db non-flatness adjustment(normally)
System	LCD display & keyboard operation, WEB, Chinese & English operation display	LCD display & keyboard operation, WEB, Chinese & English operation display	LCD display & keyboard operation, WEB, Chinese & English operation display
System	Supporting software upgrading through WEB	Supporting software upgrading through WEB	Supporting software upgrading through WEB
General	Demission (W*L*H)	440mm×414mm×44.5 mm	440mm×414mm×44.5 mm
General	Weight	4.9kg	4.9kg
General	Temperature	0~45■(operation),-20~80■(storage)	0~45■(operation),-20~80■(storage)
General	Power supply	AC 100V~240V,50/60Hz	AC 100V~240V,50/60Hz

General	Consumption	25W	25W
---------	-------------	-----	-----

Principle chart

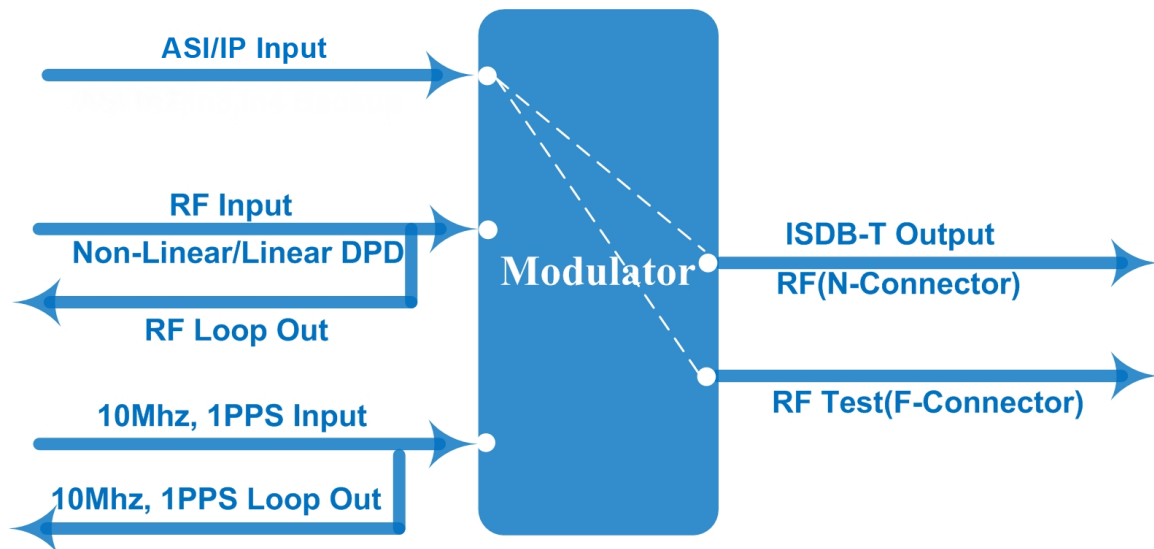

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)