


FMUSER FUQ-3517X Modulator Dual 2 ASI 2 IP Inputs DVB-T-T RF Output Non-linear DPD Web Control Broadcast and Labs Modulator



Product overview

The FMUSER FUQ-3517X modulator delivers DVB-T/(T) modulation with dual ASI and IP inputs and RF output. It processes signals using non-linear DPD to enhance spectrum efficiency. Featuring web-based control and a high-stability oscillator, it supports broadcast applications for fixed/mobile devices and DVB-T/(T) STBs.

Principle chart

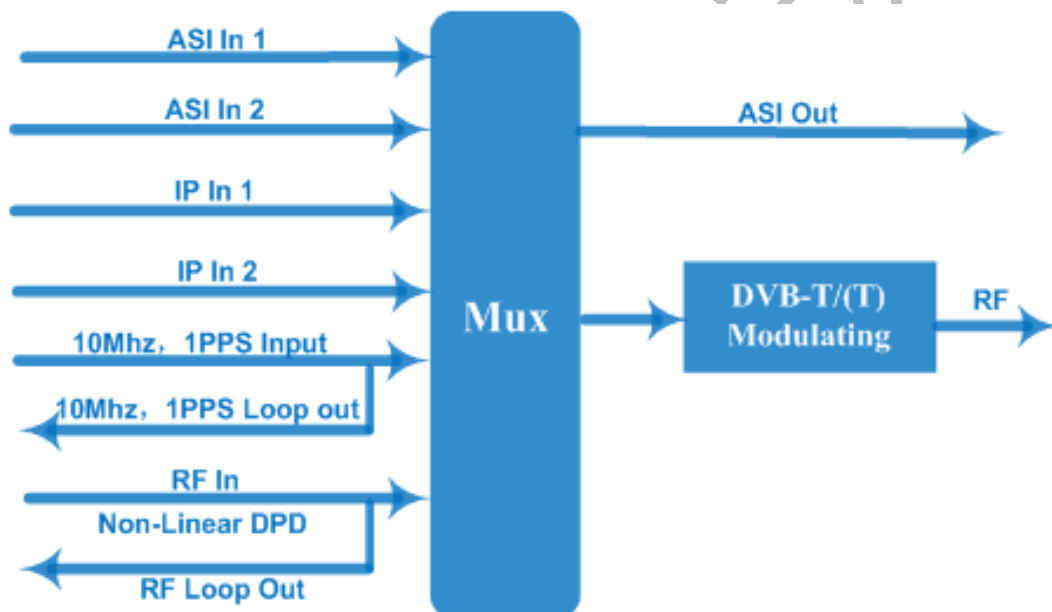

Key feature

Supports dual ASI and IP inputs over UDP protocol.

Integrates non-linear DPD enhancing MER (>43dB) and shoulder attenuation (>56dB).

Provides web network management for remote upgrades, PID remapping, and MFN net mode control.

Includes constant temperature crystal oscillator with 0.1ppm stability.

Supports DVB-T/(T) RF output in 150–999MHz range with configurable guard intervals and constellations.


Specifications

Input	TS input over 2 ASI and 2 IP port (UDP)	TS input over 2 ASI and 2 IP port (UDP)	TS input over 2 ASI and 2 IP port (UDP)	TS input over 2 ASI and 2 IP port (UDP)
Input	10MHz reference clock input and loop out, BNC interface	10MHz reference clock input and loop out, BNC interface	10MHz reference clock input and loop out, BNC interface	10MHz reference clock input and loop out, BNC interface
Input	1PPS input and loop out, BNC interface	1PPS input and loop out, BNC interface	1PPS input and loop out, BNC interface	1PPS input and loop out, BNC interface
Multiplexing(option)	Maximum PID Remapping	128 input per channel	128 input per channel	128 input per channel
Multiplexing(option)	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing(option)	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing(option)	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	DVB-(T)	Standard	Standard	EN302 755
Modulation	DVB-(T)	Mode	Mode	Mode A: single-PLP;
Modulation	DVB-(T)	PLP Constellation	PLP Constellation	QPSK, 16QAM, 64QAM, 256QAM (Normal or Rotated)
Modulation	DVB-(T)	L1 Post Constellations	L1 Post Constellations	BPSK, QPSK, 16QAM, 64QAM


Modulation	DVB-(T)	FEC Length	FEC Length	Short(16K), Normal (64K)
Modulation	DVB-(T)	FEC Rate	FEC Rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6
Modulation	DVB-(T)	Pilot Pattern	Pilot Pattern	PP1 - PP8
Modulation	DVB-(T)	Guard Interval	Guard Interval	1/128, 1/32, 1/16, 19/256, 1/8, 19/128, 1/4
Modulation	DVB-(T)	FFT Mode	FFT Mode	1k, 2k, 4k 8k, 16k, 32k (normal or extended)
Modulation	DVB-(T)	Bandwidth	Bandwidth	5MHz, 6MHz, 7MHz, 8MHz
Modulation	DVB-(T)	Net Mode	Net Mode	MFN
Modulation	DVB-T	Standard	Standard	EN300 744
Modulation	DVB-T	FFT	FFT	2K, 8K
Modulation	DVB-T	Bandwidth	Bandwidth	5MHz, 6MHz, 7MHz, 8MHz
Modulation	DVB-T	Constellation	Constellation	QPSK, 16QAM, 64QAM
Modulation	DVB-T	Guard interval	Guard interval	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	Net Mode	Net Mode	MFN
RF Out	Connector	N Type, 50ΩImpedance	N Type, 50ΩImpedance	N Type, 50ΩImpedance
RF Out	RF range	150~999Mhz, 1hz stepping	150~999Mhz, 1hz stepping	150~999Mhz, 1hz stepping
RF Out	Output level ATT	-15~+5 dBm, 0.1db stepping	-15~+5 dBm, 0.1db stepping	-15~+5 dBm, 0.1db stepping
RF Out	MER	> 43db	> 43db	> 43db
RF Out	Shoulder Level	>56dB	>56dB	>56dB
System	LCD display, keyboard and web Network management	LCD display, keyboard and web Network management	LCD display, keyboard and web Network management	LCD display, keyboard and web Network management

System	Supporting software upgrading through network	Supporting software upgrading through network	Supporting software upgrading through network	Supporting software upgrading through network
General	Demission (W*L*H)	Demission (W*L*H)	482mm×410mm×44mm	482mm×410mm×44mm
General	Temperature	Temperature	0~45■(operation), -20~80■(storage)	0~45■(operation), -20~80■(storage)
General	Power supply	Power supply	AC 220V±10%, 50/60Hz	AC 220V±10%, 50/60Hz

Shoulder Level with DPD enabled:

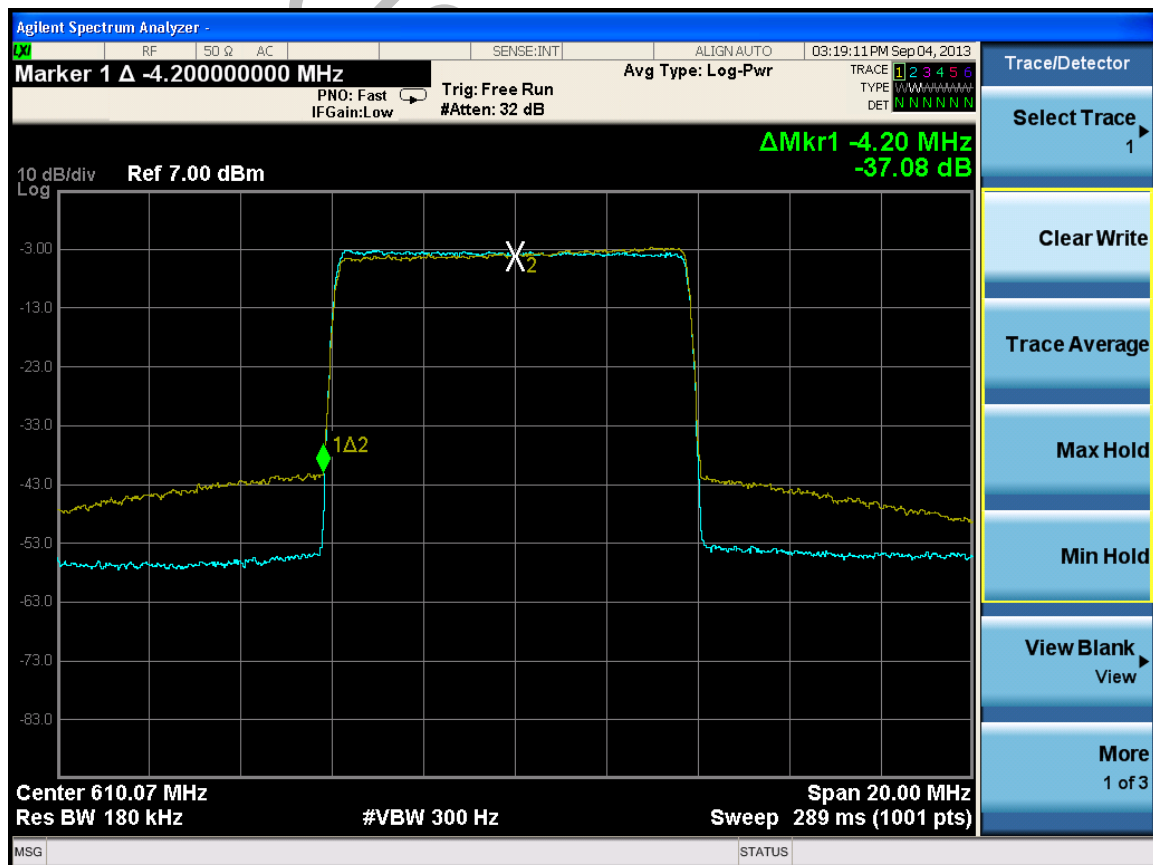

MER:

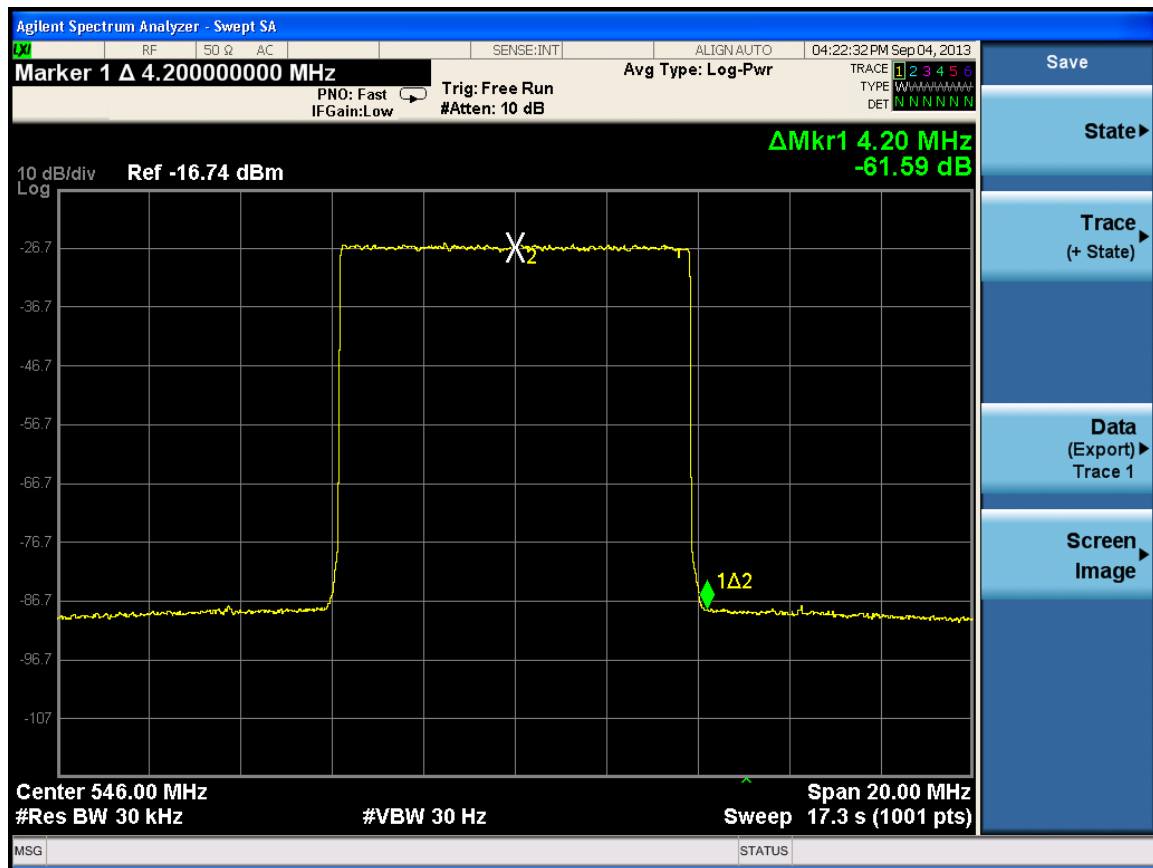

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact: Tomleequan Email: sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)