


FMUSER FUQ-3532AB Encoder Modulator 32 CVBS-256 IP Inputs 8 MPTS IP-8 RF Outputs MPEG-4 AVC-H.264 DVB-C-T Encoding Modulation for DTV Broadcasting



OSD (Logo/PPT/Caption/QR Code) Insertion

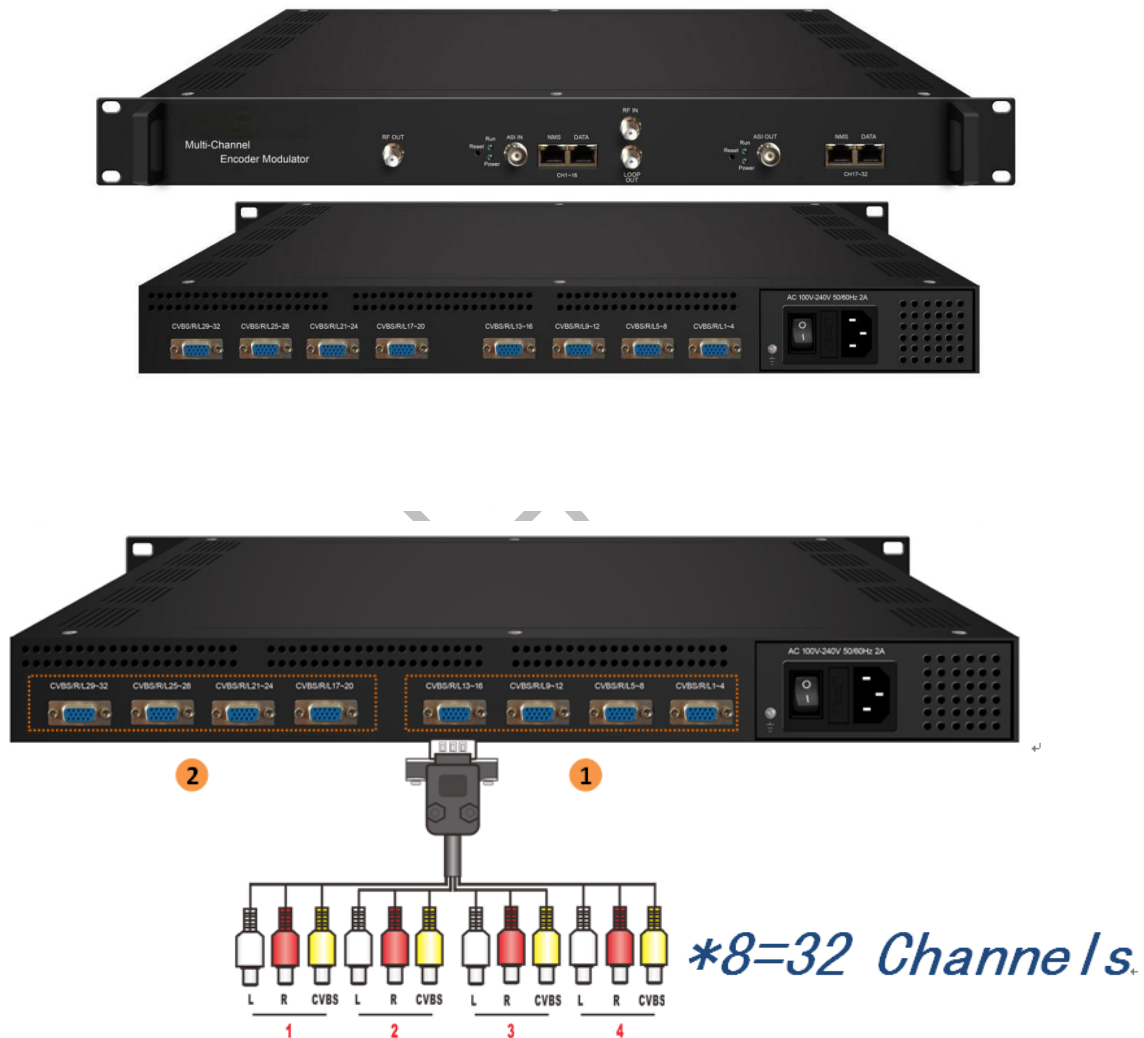

Product Overview

The FMUSER FUQ-3532AB integrates encoding, multiplexing, and modulating functions, supporting 32 CVBS inputs, 1 DVB-C tuner, 1 ASI, and 256 IP inputs, with 8 MPTS outputs via IP and 8 RF outputs. It processes signals by encoding with MPEG4 AVC/H.264, multiplexing, and modulating for transmission. Housed in a standard 1U case, it offers web-based management for real-time monitoring and updates. Ideal for DTV broadcasting systems, enabling cost-effective multi-channel distribution in cable and IPTV networks. DX3532SA also supports 1 DVB-C tuner input, 1 ASI and 256 IP input and 8 non-adjacent carriers output through RF output interface and data port output. The device is also characterized with high integrated level, high performance and low cost. This is very adaptable to newly generation DTV broadcasting system.

Key feature

Integrated Encoding and Modulating: Combines encoding and modulating in a compact 1U case for efficient processing.


Versatile Input Support: Accepts 32 CVBS, 1 DVB-C tuner, 1 ASI, and 256 IP inputs over UDP/RTP.


Advanced Output Capabilities: Generates 8 MPTS outputs via IP and 8 RF outputs for flexible broadcasting.

Stream Management Tools: Enables PID remapping, PCR adjustment, PSI/SI editing, and logo insertion.

Web-Based Control: Features real-time monitoring and easy updates via web interface.

Principle Chart

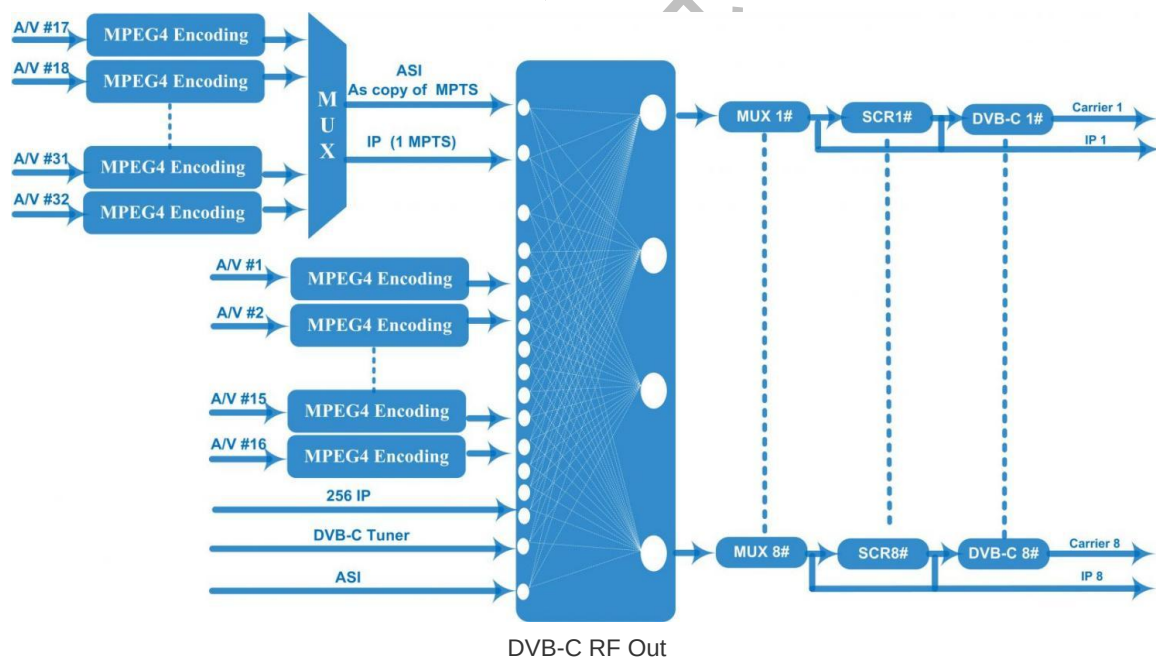

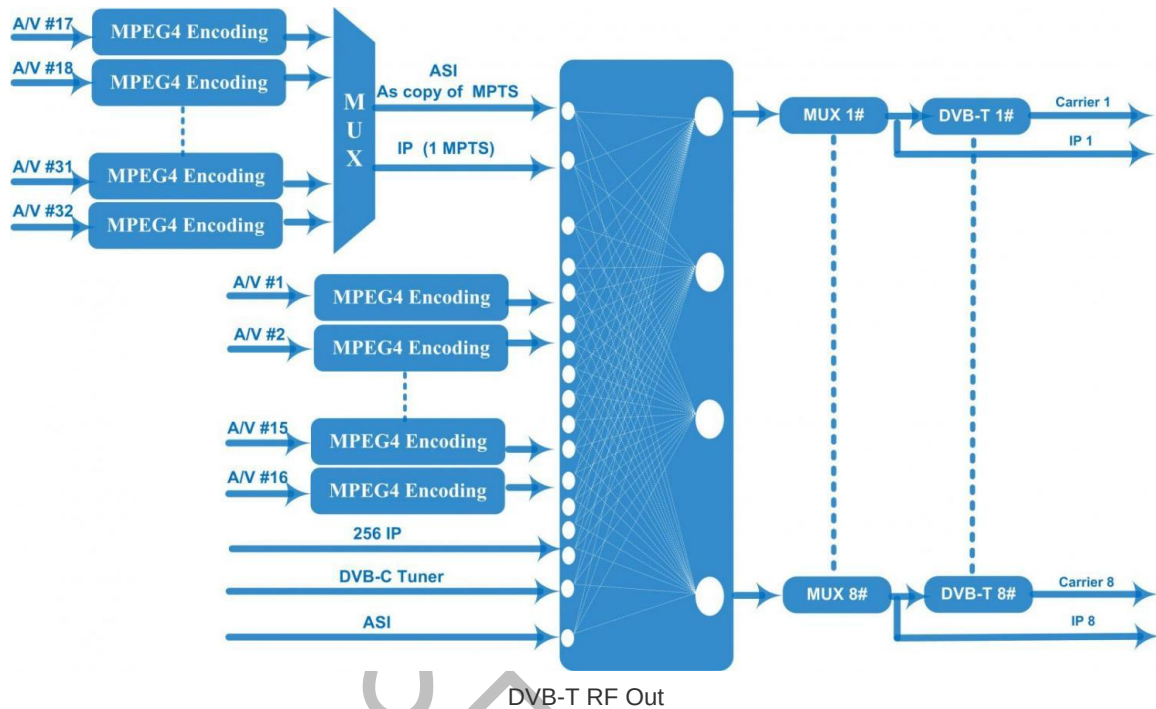

Technical specification

Input	32 CVBS inputs , DB15 -To-RCA interface	32 CVBS inputs , DB15 -To-RCA interface	32 CVBS inputs , DB15 -To-RCA interface	32 CVBS inputs , DB15 -To-RCA interface	32 CVBS inputs , DB15 -To-RCA interface
Input	1ASI input port	1ASI input port	1ASI input port	1ASI input port	1ASI input port
Input	256 IP (100/1 000M)input over UDP and RTP protocol	256 IP (100/1 000M)input over UDP and RTP protocol	256 IP (100/1 000M)input over UDP and RTP protocol	256 IP (100/1 000M)input over UDP and RTP protocol	256 IP (100/1 000M)input over UDP and RTP protocol
Input	1 DVB-C Tuner input	1 DVB-C Tuner input	1 DVB-C Tuner input	1 DVB-C Tuner input	1 DVB-C Tuner input
Video	Resolution	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)
Video	Encoding	MPEG4 AVC/ H.264■HP/M P/BP■	MPEG4 AVC/ H.264■HP/M P/BP■	MPEG4 AVC/ H.264■HP/M P/BP■	MPEG4 AVC/ H.264■HP/M P/BP■
Video	Bit-rate	1Mbps~5Mbps each channel	1Mbps~5Mbps each channel	1Mbps~5Mbps each channel	1Mbps~5Mbps each channel

Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	IPP(P frame is adjustable)	IPP(P frame is adjustable)	IPP(P frame is adjustable)	IPP(P frame is adjustable)
Audio	Encoding	MPEG-1 Layer 2	MPEG-1 Layer 2	MPEG-1 Layer 2	MPEG-1 Layer 2
Audio	Sampling rate	48KHz	48KHz	48KHz	48KHz
Audio	Resolution	24-bit	24-bit	24-bit	24-bit
Audio	Audio Gain	0-255 adjustable	0-255 adjustable	0-255 adjustable	0-255 adjustable
Audio	Bit-rate	64/128/192/224/256/320/384Kbps each channel	64/128/192/224/256/320/384Kbps each channel	64/128/192/224/256/320/384Kbps each channel	64/128/192/224/256/320/384Kbps each channel
Modulation	DVB-C	QAM Channel: 8 non-adjacent carriers output (maximum bandwidth 192MHz) Standard: EN300 429/ITU-T J.83A/B MER: ≥ 40 dB RF frequency: 50~960MHz, 1KHz step RF output level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msp s~7.0Msp s, 1ksps step	QAM Channel: 8 non-adjacent carriers output (maximum bandwidth 192MHz) Standard: EN300 429/ITU-T J.83A/B MER: ≥ 40 dB RF frequency: 50~960MHz, 1KHz step RF output level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msp s~7.0Msp s, 1ksps step	QAM Channel: 8 non-adjacent carriers output (maximum bandwidth 192MHz) Standard: EN300 429/ITU-T J.83A/B MER: ≥ 40 dB RF frequency: 50~960MHz, 1KHz step RF output level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msp s~7.0Msp s, 1ksps step	QAM Channel: 8 non-adjacent carriers output (maximum bandwidth 192MHz) Standard: EN300 429/ITU-T J.83A/B MER: ≥ 40 dB RF frequency: 50~960MHz, 1KHz step RF output level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msp s~7.0Msp s, 1ksps step
Modulation	DVB-C			J.83A	J.83B
Modulation	DVB-C	Constellation	Constellation	16/32/64/128/256QAM	64/256 QAM
Modulation	DVB-C	Bandwidth	Bandwidth	8M	6M
Modulation	DVB-T	Standard	Standard	EN300744	EN300744

Modulation	DVB-T	FFT mode	FFT mode	2K, 4K, 8K	2K, 4K, 8K
Modulation	DVB-T	Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M
Modulation	DVB-T	Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	DVB-T	Guard Interval	Guard Interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	MER	MER	≥40 dB	≥40 dB
Modulation	DVB-T	RF frequency	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step
Modulation	DVB-T	RF out	RF out	8*COFDM DVB-T non-adjacent carriers output (maximum bandwidth 192MHz)	8*COFDM DVB-T non-adjacent carriers output (maximum bandwidth 192MHz)
Modulation	DVB-T	RF output level	RF output level	-20~+3 dBm (87~110 dBμV), 0.1dB step	-20~+3 dBm (87~110 dBμV), 0.1dB step
Scrambling Parameters	Max simulcrypt CA	4	4	4	4
Scrambling Parameters	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling Parameters	Connection	Local/remote connection	Local/remote connection	Local/remote connection	Local/remote connection

Stream output	IP (8*MPTS) output over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast)	IP (8*MPTS) output over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast)	IP (8*MPTS) output over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast)	IP (8*MPTS) output over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast)	IP (8*MPTS) output over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast)
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	Dimension(W×L×H)	482mm×328mm×44mm	482mm×328mm×44mm	482mm×328mm×44mm
Miscellaneous	Environment	Environment	0~45■(work) ■-20~80■■■S storage■	0~45■(work) ■-20~80■■■S storage■	0~45■(work) ■-20~80■■■S storage■
Miscellaneous	Power requirements	Power requirements	AC 110V±10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V±10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V±10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)