

FMUSER FUQ-3902B DVB-S2X Receiver 2 Tuner Inputs 32 IP Inputs UDP-RTP IP Output CAM-CI BISS Descrambling Remote Web NMS for Broadcast Engineers

Product Overview




The FMUSER FUQ-3902B is a DVB-S2X receiver that integrates demodulation, descrambling, and remuxing, featuring 2 RF tuner inputs and 32 IP inputs supporting UDP/RTP, with IP output. It converts satellite signals into IP streams through efficient processing. This compact unit enables remote control via web-based NMS management. Ideal for broadcast facilities, satellite reception, and IP streaming applications.

Key feature

- Supports dual DVB-S/S2/S2X tuner inputs for versatile reception.
- Features 32 IP inputs with UDP/RTP support for remuxing.
- Integrates decryption via CAM/CI slots and BISS.
- Enables remote monitoring and control through web-based NMS.
- Allows high PID mapping with up to 256 mappings per input channel.

Principle Chart

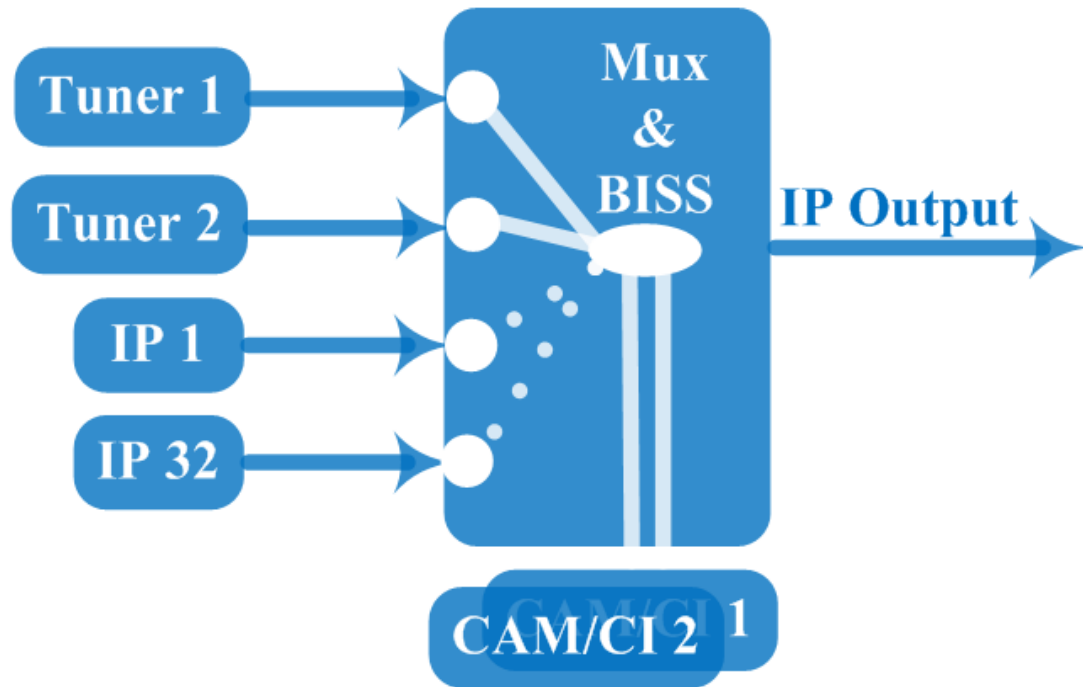

Technical specification

Input	2*RF (DVBS/S2/S2X), F type 32*IP input for re-mux (UDP/RTP) through data(100 0M/100M) ports	2*RF (DVBS/S2/S2X), F type 32*IP input for re-mux (UDP/RTP) through data(100 0M/100M) ports	2*RF (DVBS/S2/S2X), F type 32*IP input for re-mux (UDP/RTP) through data(100 0M/100M) ports	2*RF (DVBS/S2/S2X), F type 32*IP input for re-mux (UDP/RTP) through data(100 0M/100M) ports
Tuner	DVB-S	Input Frequency	Input Frequency	950-2150MHz
Tuner	DVB-S	Symbol Rate	Symbol Rate	QPSK 0.5Msps~45Msps
Tuner	DVB-S	Signal Strength	Signal Strength	-65~ -25dBm
Tuner	DVB-S	FEC Demodulation	FEC Demodulation	1/2, 2/3, 3/4, 5/6, 7/8
Tuner	DVB-S2	Input Frequency	Input Frequency	950-2150MHz
Tuner	DVB-S2	Symbol Rate	Symbol Rate	QPSK/8PSK/16A PSK 0.5Msps~45 Msps 32APSK0. 5Msps~40 Msps

Tuner	DVB-S2	FEC Demodulation	FEC Demodulation	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9
Tuner	DVB-S2X	Input Frequency	Input Frequency	950-2150MHz
Tuner	DVB-S2X	Symbol Rate	Symbol Rate	QPSK/8PSK/16APSK: 0.5~45 Msps; 8APSK/32APSK: 0.5~40 Msps
Tuner	DVB-S2X	FEC Demodulation	FEC Demodulation	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9
Multiplexing	Maximum PID Remapping	256 PIDs per input channel	256 PIDs per input channel	256 PIDs per input channel

Multiplexing	Function	PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically	PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically	PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically
Descrambling	CAM/CI Quantity	2	2	2
Descrambling	BISS Mode	Mode 1, Mode E; up to 120Mbps	Mode 1, Mode E; up to 120Mbps	Mode 1, Mode E; up to 120Mbps
Output	1*MPTS over UDP and RTP, 1000M/100M Base-T Ethernet interfaces (unicast / multicast)	1*MPTS over UDP and RTP, 1000M/100M Base-T Ethernet interfaces (unicast / multicast)	1*MPTS over UDP and RTP, 1000M/100M Base-T Ethernet interfaces (unicast / multicast)	1*MPTS over UDP and RTP, 1000M/100M Base-T Ethernet interfaces (unicast / multicast)
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	English language	English language	English language	English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	Dimension(W×L×H)	482mm×328mm×44mm	482mm×328mm×44mm
Miscellaneous	Environment	Environment	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■
Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact: Tomleequan Email sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)