
**FMUSER FUQ-41013K TransModulator 2-In 2-Out DVB-S-S2-S2X
to DVB-T Dual Tuners CAM Slots EN300744 Advanced Signal
Processing Broadcast Systems**



Product overview

The FMUSER FUQ-41013K TransModulator converts satellite signals to terrestrial formats with dual DVB-S/S2/S2X tuners and 2 CAM slots. It processes signals through 2 groups multiplexing and 2 groups DVB-T modulating, including PCR adjusting and PID remapping. Managed via web-based NMS for remote control, it suits broadcasters in TV transmission and terrestrial network deployments.

Key feature


Features dual DVB-S/S2/S2X tuners with 2 CAM slots for secure reception.

Supports 2 groups multiplexing and 2 groups DVB-T modulating for flexible output.

Includes accurate PCR adjusting, PID remapping, PSI/SI editing, and A/V PID filtering.

Enables web-based NMS for remote monitoring and upgrades.

Principle Chart

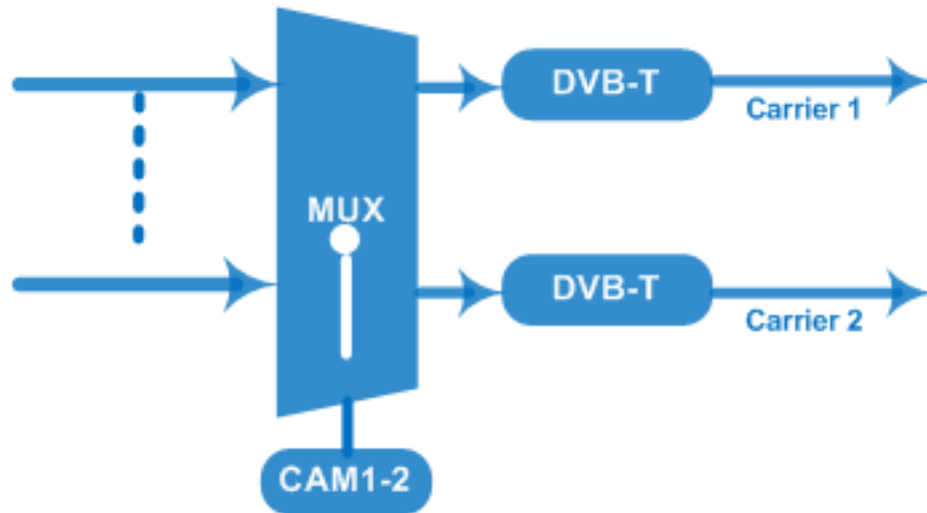

Tech Specifications

Input	2 DVB-S/S2/S2X Tuners	2 DVB-S/S2/S2X Tuners	2 DVB-S/S2/S2X Tuners	2 DVB-S/S2/S2X Tuners
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S	Input Frequency	950~2150MHz
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S	Symbol rate	0.5~45Msps
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S	Signal Strength	- 65- -25dBm
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S	Constellation	QPSK
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S	Max input bitrate	≤129 Mbps
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2	Input Frequency	950~2150MHz
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2	Symbol rate	QPSK/8PSK /16APSK: 0.5~45 Msps 32APSK: 0.5~40Msps;

Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2	Max input bitrate	≤129 Mbps
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2X	Input Frequency	950~2150MHz
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2X	Symbol rate	QPSK/8PSK /16APSK: 0.5~45 Msps 8APSK: 0.5~40Msps 32APSK: 0.5~40Msps
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2X	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9

Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2X	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Tuner Section	DVB-S/S2/S2X Tuner	DVB-S2X	Max input bitrate	≤129 Mbps
Descrambling	CAM/CI	CAM/CI	2 sets	2 sets
Multiplexing	Maximum PID Remapping	Maximum PID Remapping	256 per input channel	256 per input channel
Multiplexing	Function	Function	A/V PID filtering	A/V PID filtering
Multiplexing	Function	Function	PID Remapping	PID Remapping
Multiplexing	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	DVB-T	DVB-T	Standard	EN300744
Modulation	DVB-T	DVB-T	FFT mode	2K
Modulation	DVB-T	DVB-T	Bandwidth	6M, 7M, 8M
Modulation	DVB-T	DVB-T	Constellation	QPSK, 16QAM, 64QAM
Modulation	DVB-T	DVB-T	Guard Interval	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	DVB-T	Code Rate	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	DVB-T	MER	≥42 dB
Modulation	DVB-T	DVB-T	RF frequency	50~960MHz, 1KHz step
Modulation	DVB-T	DVB-T	RF out	2*DVB-T non-adjacent carriers combined output
Modulation	DVB-T	DVB-T	RF output level	-28~ -3 dBm (79~104 dBμV), 0.1db step
System	Web-based NMS support	Web-based NMS support	Web-based NMS support	Web-based NMS support
System	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading

General	Temperature	Temperature	0~45■(Operation) ; -20~80■(Storage)	0~45■(Operation) ; -20~80■(Storage)
General	Power	Power	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)