

FMUSER FUQ-4315B 4-Channel Encoder 4× CVBS-S-Video-YPbPr Input ASI-IP Output MPEG-2 MPEG-1 Layer II Encoding Multiplexing for Cable Headends Satellite Broadcasting

Product Overview




The FUQ-4315E is a 4-channel encoder with CVBS/S-Video/YPbPr inputs, supporting MPEG-2 video and MPEG-1 Layer II audio encoding. It processes signals through ASI input multiplexing to generate MPTS streams, with outputs via IP and ASI. This unit features LCD+keyboard control and Web NMS/SNMP management. Ideal for digital headends in cable and satellite broadcasting systems.

Key feature

- Integrates 4× CVBS/S-Video/YPbPr inputs and 1× ASI input for flexible signal integration.
- Supports MPEG-2 video encoding at 1-19.5Mbps and MPEG-1 Layer II audio encoding.
- Provides ASI and IP outputs with UDP/RTP multicast/unicast capability.
- Ensures stream stability through CBR and PCR adjustment.
- Enables PSI/SI editing and PID remapping/passthrough, managed via LCD+keyboard or Web NMS/SNMP.

Principle Chart

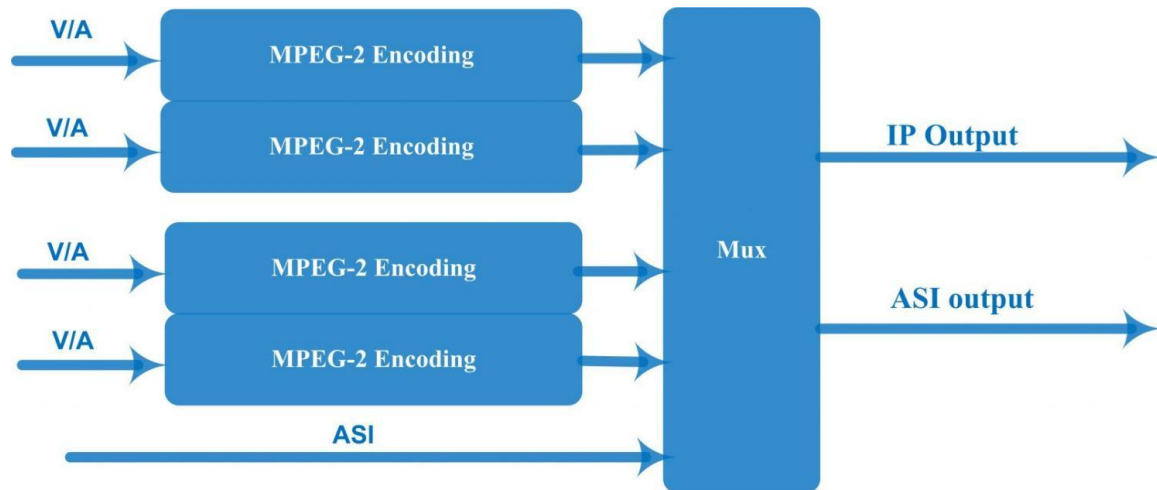

Specifications

Input	4xS-Video/YPbPr/CVBS (RCA)	4xS-Video/YPbPr/CVBS (RCA)	4xS-Video/YPbPr/CVBS (RCA)
Input	1×ASI input	1×ASI input	1×ASI input
Encoding	Video	Format	MPEG-2 MP@ML (4:2:0)
Encoding	Video	Interface	S-Video/YPbPr/CVBS *4(RCA)
Encoding	Video	Bitrate	1-19.5Mbps
Encoding	Video	Resolution	720*480_60i, 720*576_50i
Encoding	Video	Rate mode	VBR/CBR
Encoding	Video	Chroma	4:2:0
Encoding	Video	Aspect	16:9,4:3, 1:1, 2.21:1
Encoding	Audio	Format	MPEG1 Layer II
Encoding	Audio	Interface	4*Stereo or 8*mono (RCA)
Encoding	Audio	Sample rate	48KHz
Encoding	Audio	Bitrate	64kbps,96kbps,128kbps,192kbps,256kbps,320kbps
Stream output	1*ASI	1*ASI	1*ASI

Stream output	1 IP over UDP/RTP, 10/100Base-T Ethernet interface (unicast / multicast)	1 IP over UDP/RTP, 10/100Base-T Ethernet interface (unicast / multicast)	1 IP over UDP/RTP, 10/100Base-T Ethernet interface (unicast / multicast)
System	Local interface	LCD + control buttons	LCD + control buttons
System	Remote management	Web NMS Management	Web NMS Management
System	Language	English	English
General	Dimension (W*D*H)	482mm×300mm×44.5 mm	482mm×300mm×44.5 mm
General	Weight	3.5kg	3.5kg
General	Temperature	0~45■(Operation) ; -20~80■(Storage)	0~45■(Operation) ; -20~80■(Storage)
General	Power	AC 100V~240V	AC 100V~240V
General	Consumption	25W	25W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)