

FMUSER FUQ-4322AB HD Encoder 2 Inputs HDMI-HD-SDI 3 Outputs ASI-IP HEVC-H.265 H.264 Encoding OSD Insertion Broadcasting Live Streaming



OSD (Logo/PPT/Caption/QR Code) Insertion



Product overview


The FMUSER FUQ-4322AB is a professional HD encoder supporting HEVC/H.265 and H.264 video encoding. It accepts inputs from HDMI and HD-SDI sources and outputs via ASI or IP with OSD insertion. Control is managed through web management. Ideal for broadcasting applications like live streaming and television transmission. Multiple audio and video encoding formats are available to meet customers' various requirements. It supports 2 stereo (4 mono) to mix with the video to form a stream output. The encoded program will finally output in TS through ASI/IP port.

Key feature

- Supports HEVC/H.265 and H.264 HD video encoding with B-frame support.
- Features OSD insertion for QR codes, logos, and captions.
- Offers flexible audio encoding supporting 2 stereos or 4 mono channels with MPEG-1 Layer II, HE-AAC, and LC-AAC.

- Provides multiple output options including ASI and IP over UDP/RTP/RTSP.

Inner Principle Chart

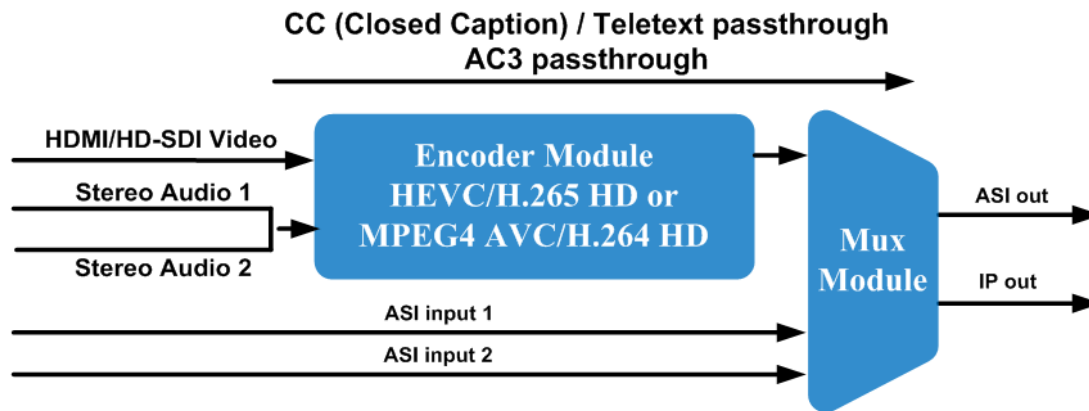

- Supports HEVC/H.265 and H.264 HD video encoding with B-frame support.
- Features OSD insertion for QR codes, logos, and captions.
- Offers flexible audio encoding supporting 2 stereos or 4 mono channels with MPEG-1 Layer II, HE-AAC, and LC-AAC.
- Provides multiple output options including ASI and IP over UDP/RTP/RTSP.

Specifications

Video	Interface	1×HDMI, 1×HD-SDI	1×HDMI, 1×HD-SDI	1×HDMI, 1×HD-SDI	1×HDMI, 1×HD-SDI
Video	Resolution	Input	Input	Output	Output
Video	Resolution	Input	Input	MPEG-4 AVC/H.264 HD	HEVC/H.265 HD
Video	Resolution	1920×1080p @60/59.94	1920×1080p @60/59.94	1920×1080p @60/59.94	1920×1080p @60/59.94
Video	Resolution	1920×1080p @50	1920×1080p @50	1920×1080p @50	1920×1080p @50
Video	Resolution	1920×1080i@ 60/59.94	1920×1080i@ 60/59.94	1920×1080i@ 60 1920×108 0p@60/30	1920×1080p @60
Video	Resolution	1920×1080i @50	1920×1080i @50	1920×1080i@ 50 1920×108 0p@50/25	1920×1080p @50
Video	Resolution	1280×720p@ 60/59.94	1280×720p@ 60/59.94	1280×720p@ 60/59.94	1280×720p@ 60/59.94
Video	Resolution	1280×720p@ 50	1280×720p@ 50	1280×720p@ 50	1280×720p@ 50

Video	Encoding	HEVC/H.265 HD; MPEG-4 AVC/H.264 HD	HEVC/H.265 HD; MPEG-4 AVC/H.264 HD	HEVC/H.265 HD; MPEG-4 AVC/H.264 HD	HEVC/H.265 HD; MPEG-4 AVC/H.264 HD
Video	Bitrate Range	HEVC/H.265: 0.5 – 20.00 Mbps MPEG-4 AVC/H.264: 4 – 20.00 Mbps	HEVC/H.265: 0.5 – 20.00 Mbps MPEG-4 AVC/H.264: 4 – 20.00 Mbps	HEVC/H.265: 0.5 – 20.00 Mbps MPEG-4 AVC/H.264: 4 – 20.00 Mbps	HEVC/H.265: 0.5 – 20.00 Mbps MPEG-4 AVC/H.264: 4 – 20.00 Mbps
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	IPPP, IBBP	IPPP, IBBP	IPPP, IBBP	IPPP, IBBP
Video	Chroma	4:2:0	4:2:0	4:2:0	4:2:0
Audio	Interface	2×XLR, 2×AES, 2×RCA, 1×SDI (support maximum 2 stereos synchronous processing), 1×HDMI,	2×XLR, 2×AES, 2×RCA, 1×SDI (support maximum 2 stereos synchronous processing), 1×HDMI,	2×XLR, 2×AES, 2×RCA, 1×SDI (support maximum 2 stereos synchronous processing), 1×HDMI,	2×XLR, 2×AES, 2×RCA, 1×SDI (support maximum 2 stereos synchronous processing), 1×HDMI,
Audio	Encoding	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 passthrough	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 passthrough	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 passthrough	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 passthrough
Audio	Sampling rate	48KHz	48KHz	48KHz	48KHz
Audio	Bit-rate	48Kbps~384Kbps	48Kbps~384Kbps	48Kbps~384Kbps	48Kbps~384Kbps
Stream Input	Stream Input	2 ASI Input for remux	2 ASI Input for remux	2 ASI Input for remux	2 ASI Input for remux
Stream output	Stream output	2×ASI output ports, BNC interface	2×ASI output ports, BNC interface	2×ASI output ports, BNC interface	2×ASI output ports, BNC interface

Stream output	Stream output	1 IP (MPTS) over UDP / RTP /RTSP, 1000 Base-T Ethernet interface*2 with independent IP addresses (multicast/unicast)	1 IP (MPTS) over UDP / RTP /RTSP, 1000 Base-T Ethernet interface*2 with independent IP addresses (multicast/unicast)	1 IP (MPTS) over UDP / RTP /RTSP, 1000 Base-T Ethernet interface*2 with independent IP addresses (multicast/unicast)	1 IP (MPTS) over UDP / RTP /RTSP, 1000 Base-T Ethernet interface*2 with independent IP addresses (multicast/unicast)
System function	System function	LCD/keyboard and web management	LCD/keyboard and web management	LCD/keyboard and web management	LCD/keyboard and web management
System function	System function	Language: English	Language: English	Language: English	Language: English
System function	System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	General	Dimensions	482mm×405mm×44.5mm (W × D × H)	482mm×405mm×44.5mm (W × D × H)	482mm×405mm×44.5mm (W × D × H)
General	General	Temperature	0~45℃(Operation), -20~80℃(Storage)	0~45℃(Operation), -20~80℃(Storage)	0~45℃(Operation), -20~80℃(Storage)
General	General	Power	AC110V±10%, 50/60Hz; AC 220V±10%, 50/60Hz	AC110V±10%, 50/60Hz; AC 220V±10%, 50/60Hz	AC110V±10%, 50/60Hz; AC 220V±10%, 50/60Hz
General	General	Consumption	15W	15W	15W

- Supports HEVC/H.265 and H.264 HD video encoding with B-frame support.
- Features OSD insertion for QR codes, logos, and captions.
- Offers flexible audio encoding supporting 2 stereos or 4 mono channels with MPEG-1 Layer II, HE-AAC, and LC-AAC.
- Provides multiple output options including ASI and IP over UDP/RTP/RTSP.

Technical Comparison

- Supports HEVC/H.265 and H.264 HD video encoding with B-frame support. - Features OSD insertion for QR codes, logos, and captions. - Offers flexible audio encoding supporting 2 stereos or 4 mono channels with MPEG-1 Layer II, HE-AAC, and LC-AAC. - Provides multiple output options including ASI and IP over UDP/RTP/RTSP. - Supports HEVC/H.265 and H.264 HD video encoding with B-frame support. - Features OSD insertion for QR codes, logos, and captions. - Offers flexible audio encoding supporting 2 stereos or 4 mono channels with MPEG-1 Layer II, HE-AAC, and LC-AAC. - Provides multiple output options including ASI and IP over UDP/RTP/RTSP.	FU-4322B	FU-4322A	FU-4322HV
Chipset	Magnum	Magnum	Fujitsu
Video Encoding	MPEG-2 HD/SD; MPEG-4 AVC/H.264 HD/SD	MPEG-2 HD/SD; MPEG-4 AVC/H.264 HD/SD	HEVC/H.265 HD MPEG-4 AVC/H.264 HD
Bit Rate	0.20 – 60.00 Mbps	0.25Mbps~60.5Mbps	HEVC/H.265: 0.5 – 20.00 Mbps MPEG-4 AVC/H.264: 4 – 20.00 Mbps
HDMI Resolution	HD	HD/SD	HD

Audio Encode	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 (2.0), DD AC3 passthrough (for SDI in)	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC; DD AC3 passthrough	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 passthrough (for SDI and HDMI)
Audio Channel	Up to 4 stereos	Up to 2 stereos	Up to 2 stereos
Rate Control	CBR	CBR/VBR	CBR/VBR
Aspect Ratio	16:9, 4:3, 14:9	16:9, 4:3, 1:1, 2.35:1	- Supports HEVC/H.265 and H.264 HD video encoding with B-frame support. - Features OSD insertion for QR codes, logos, and captions. - Offers flexible audio encoding supporting 2 stereos or 4 mono channels with MPEG-1 Layer II, HE-AAC, and LC-AAC. - Provides multiple output options including ASI and IP over UDP/RTP/RTSP.
Chroma	4:2:0, 4:2:2	4:2:0, 4:2:2	4:2:0
One-seg	N/A	Yes	N/A
Video Buffer	Yes	N/A	N/A
ASI In & Mux	N/A	1 ASI input for remux	2 ASI input for remux
IP out	1SPTS over UDP/RTP	MPTS/8*SPTS over UDP/RTP,	1 MPTS over UDP / RTP /RTSP
Low Delay	150ms, 200ms, 350ms, 650ms	1400ms - 5000ms, 1ms stepping	N/A
Closed Caption	EIA 608 and EIA 708	EIA 608 and EIA 708	EIA 608
OSD Function	Yes	N/A	Yes
Management	Web-server	Web-server, SNMP	Web-server

- Supports HEVC/H.265 and H.264 HD video encoding with B-frame support.

- Features OSD insertion for QR codes, logos, and captions.

-
- Offers flexible audio encoding supporting 2 stereos or 4 mono channels with MPEG-1 Layer II, HE-AAC, and LC-AAC.
 - Provides multiple output options including ASI and IP over UDP/RTP/RTSP.

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact: Tomleequan Email sales@fmuser.com whatsapp: +8613922702227