

FMUSER FUQ-4322B Professional 4K Encoder Dual HDMI 2.0 Inputs 4 ASI Outputs IP MPTS UDP-RTP H.265 HEVC H.264 Broadcast Streaming

Product Overview



The FMUSER FUQ-4322B is a 4K encoder featuring dual HDMI 2.0 inputs with hot redundancy, supporting H.265/HEVC and H.264/AVC video encoding. It outputs 1 TS via 4 ASI ports and 1 MPTS over IP with real-time bit-rate monitoring. Controlled via web-based NMS, it is ideal for broadcast and streaming applications.

Key feature

Supports dual HDMI 2.0 inputs with hot redundancy and loop-out for 1080P/4K conversion.

Encodes video in H.265/HEVC and H.264/AVC formats with CBR control (1–23Mbps).

Outputs via 4 ASI ports and 1 MPTS over IP (UDP/RTP, unicast/multicast).

Features broadcast enhancements including logo insertion, captioning, and QR code insertion.

(1080P and 4K convert to each other)


Specifications

Input	1×HDMI input (2.0) with 2 HDMI port, HDCP 2.2/1.4	1×HDMI input (2.0) with 2 HDMI port, HDCP 2.2/1.4	1×HDMI input (2.0) with 2 HDMI port, HDCP 2.2/1.4	1×HDMI input (2.0) with 2 HDMI port, HDCP 2.2/1.4
Input	2 ASI input, BNC interface	2 ASI input, BNC interface	2 ASI input, BNC interface	2 ASI input, BNC interface
Input	32 IP input over UDP and RTP protocol	32 IP input over UDP and RTP protocol	32 IP input over UDP and RTP protocol	32 IP input over UDP and RTP protocol
Video Input	Resolution	Resolution	Resolution	Chroma

Video Input	3840×2160_60P, 3840×2160_59.94P, 3840×2160_50P, 3840×2160_30P, 3840×2160_29.96P, 3840×2160_25P, 3840×2160_24P, 1920×1080_60P, 1920×1080_59.94P, 1920×1080_50P, 1920×1080_30P, 1920×1080_25P, 1920×1080_24P,	3840×2160_60P, 3840×2160_59.94P, 3840×2160_50P, 3840×2160_30P, 3840×2160_29.96P, 3840×2160_25P, 3840×2160_24P, 1920×1080_60P, 1920×1080_59.94P, 1920×1080_50P, 1920×1080_30P, 1920×1080_25P, 1920×1080_24P,	3840×2160_60P, 3840×2160_59.94P, 3840×2160_50P, 3840×2160_30P, 3840×2160_29.96P, 3840×2160_25P, 3840×2160_24P, 1920×1080_60P, 1920×1080_59.94P, 1920×1080_50P, 1920×1080_30P, 1920×1080_25P, 1920×1080_24P,	RGB, YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0 (2160P_50/60Hz only)
Video Encoding	Encoding	H.265/HEVC, H.264/AVC	H.265/HEVC, H.264/AVC	H.265/HEVC, H.264/AVC
Video Encoding	Chroma	4:2:2, 4:2:0	4:2:2, 4:2:0	4:2:2, 4:2:0
Video Encoding	Bit-rate	1Mbps~23Mbps	1Mbps~23Mbps	1Mbps~23Mbps
Video Encoding	Rate Control	CBR	CBR	CBR
Audio Encoding	Encoding	MPEG-1 Layer 2, LC-AAC	MPEG-1 Layer 2, LC-AAC	MPEG-1 Layer 2, LC-AAC
Audio Encoding	Sampling rate	48KHz	48KHz	48KHz
Audio Encoding	Bit-rate	64Kbps~256Kbps each channel	64Kbps~256Kbps each channel	64Kbps~256Kbps each channel
Multiplexing	2 ASI input multiplexed with local 1 channel of TS	2 ASI input multiplexed with local 1 channel of TS	2 ASI input multiplexed with local 1 channel of TS	2 ASI input multiplexed with local 1 channel of TS
Multiplexing	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Stream output	1*ASI output through 4 BNC interfaces	1*ASI output through 4 BNC interfaces	1*ASI output through 4 BNC interfaces	1*ASI output through 4 BNC interfaces

Stream output	1 MPTS over UDP/RTP, 1000M/100M Base-T Ethernet interface (unicast/multicast)	1 MPTS over UDP/RTP, 1000M/100M Base-T Ethernet interface (unicast/multicast)	1 MPTS over UDP/RTP, 1000M/100M Base-T Ethernet interface (unicast/multicast)	1 MPTS over UDP/RTP, 1000M/100M Base-T Ethernet interface (unicast/multicast)
System function	LCD/keyboard operating, web NMS supporting	LCD/keyboard operating, web NMS supporting	LCD/keyboard operating, web NMS supporting	LCD/keyboard operating, web NMS supporting
System function	Ethernet software & hardware upgrade	Ethernet software & hardware upgrade	Ethernet software & hardware upgrade	Ethernet software & hardware upgrade
Miscellaneous	Dimension (W×L×H)	Dimension (W×L×H)	482mm×455mm×44mm	482mm×455mm×44mm
Miscellaneous	Approx weight	Approx weight	4kg	4kg
Miscellaneous	Temperature	Temperature	0~45℃(work), -20~80℃Storage	0~45℃(work), -20~80℃Storage
Miscellaneous	Power	Power	AC 100V-220V±10%, 50/60Hz	AC 100V-220V±10%, 50/60Hz
Miscellaneous	Consumption	Consumption	25W	25W

Principle Chart

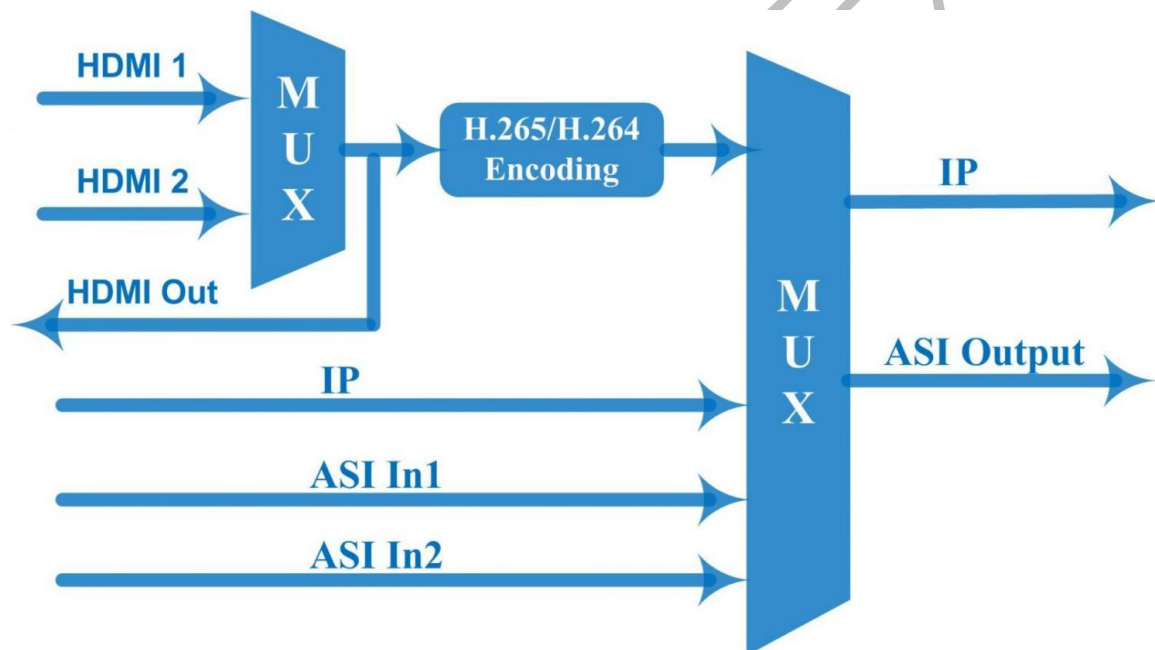

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227

FMUSER 广州艾盛