


FMUSER FUQ-4322C HD Encoder 4-Input HDMI-SDI-YPbPr-CVBS 4-Output ASI-IP MPEG-2 H.264 Encoding OSD Insertion Broadcast Applications



Delivers streams via ASI output and IP over UDP/RTP for MPTS distribution.

Features LCD/keyboard and web management interfaces for configuration.

Inner Principle Chart

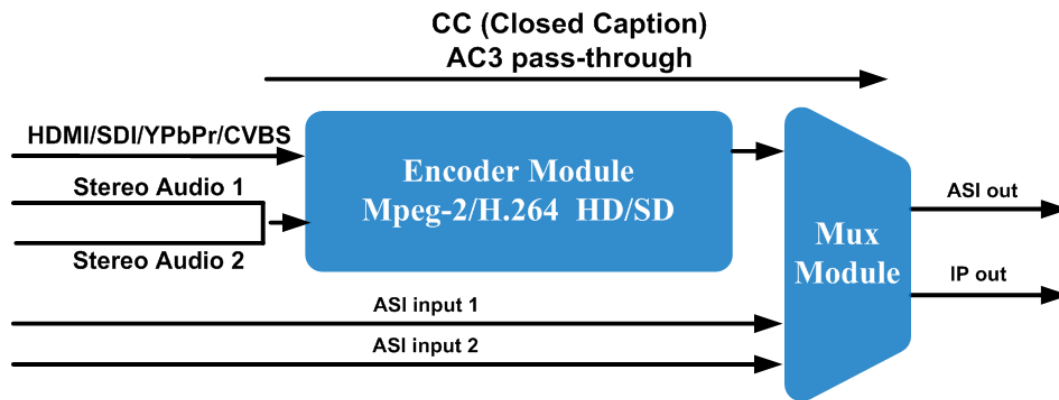

Specifications

Video	Interface	1×HDMI, 1×HD-SDI, 1×YPbPr and 1×CVBS (only for CC)	1×HDMI, 1×HD-SDI, 1×YPbPr and 1×CVBS (only for CC)	1×HDMI, 1×HD-SDI, 1×YPbPr and 1×CVBS (only for CC)
Video	Resolution	Input	Output	Interface Applicable
Video	Resolution	1920×1080p@60 /59.94	1920×1080p@60	SDI, HDMI
Video	Resolution	1920×1080p@50	1920×1080p@50	SDI, HDMI
Video	Resolution	1920×1080i@60/ 59.94	1920×1080i @60	SDI, HDMI, YpbPr
Video	Resolution	1920×1080i @50	1920×1080i @50	SDI, HDMI, YpbPr
Video	Resolution	1280×720p@60/ 59.94	1280×720p@60	SDI, HDMI, YpbPr
Video	Resolution	1280×720p@50	1280×720p@50	SDI, HDMI, YpbPr
Video	Resolution	720×576i@50	720×576i @50	SDI, HDMI
Video	Resolution	720×480i@60	720×480i @60	SDI, HDMI
Video	Encoding	MPEG-2 HD/SD, MPEG-4 AVC/H.264 HD/SD	MPEG-2 HD/SD, MPEG-4 AVC/H.264 HD/SD	MPEG-2 HD/SD, MPEG-4 AVC/H.264 HD/SD

Video	Bitrate Range	2.5 – 19.00 Mbps	2.5 – 19.00 Mbps	2.5 – 19.00 Mbps
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	IP, IBBP, IBBBP	IP, IBBP, IBBBP	IP, IBBP, IBBBP
Video	Chroma	4:2:0	4:2:0	4:2:0
Audio	Interface	2×XLR, 2×AES, 2×BNC, 1×SDI (support maximum 2 stereos synchronous processing), 1×HDMI,	2×XLR, 2×AES, 2×BNC, 1×SDI (support maximum 2 stereos synchronous processing), 1×HDMI,	2×XLR, 2×AES, 2×BNC, 1×SDI (support maximum 2 stereos synchronous processing), 1×HDMI,
Audio	Encoding	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 (2.0) DD AC3 pass-through (for SDI and HDMI in)	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 (2.0) DD AC3 pass-through (for SDI and HDMI in)	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 (2.0) DD AC3 pass-through (for SDI and HDMI in)
Audio	Sampling rate	48KHz	48KHz	48KHz
Audio	Bit-rate	32Kbps~384Kbps	32Kbps~384Kbps	32Kbps~384Kbps
Stream Input	Stream Input	2 ASI Input for remux	2 ASI Input for remux	2 ASI Input for remux
Stream output	Stream output	2×ASI output ports, BNC interface	2×ASI output ports, BNC interface	2×ASI output ports, BNC interface
Stream output	Stream output	2 IP (MPTS) over UDP / RTP /RTSP, 1000 Base-T Ethernet interface*2 with independent IP addresses (multicast/unicast)	2 IP (MPTS) over UDP / RTP /RTSP, 1000 Base-T Ethernet interface*2 with independent IP addresses (multicast/unicast)	2 IP (MPTS) over UDP / RTP /RTSP, 1000 Base-T Ethernet interface*2 with independent IP addresses (multicast/unicast)
System function	System function	LCD/keyboard and web management	LCD/keyboard and web management	LCD/keyboard and web management
System function	System function	Language: English	Language: English	Language: English

System function	System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	General	Dimensions	482mm×405mm×44.5mm (W × D × H)	482mm×405mm×44.5mm (W × D × H)
General	General	Temperature	0~45■(Operation), -20~80■(Storage)	0~45■(Operation), -20~80■(Storage)
General	General	Power	AC110V±10%, 50/60Hz; AC 220V±10%, 50/60Hz	AC110V±10%, 50/60Hz; AC 220V±10%, 50/60Hz
General	General	Consumption	16W	16W

Technical Comparison

	FU-4322B(V2)	FU-4322HS
Chipset	Vixs	Hisilicon
Video Encoding	MPEG-2 HD/SD; MPEG-4 AVC/H.264 HD/SD	HEVC/H.265 HD/SD MPEG-4 AVC/H.264 HD/SD
Bit Rate	2.5Mbps~19.0Mbps	1Mbps~15Mbps
HDMI Resolution	HD/SD	HD/SD
Audio Encode	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 (2.0), DD AC3 pass-through (for SDI and HDMI in)	MPEG-1 Layer II, HE-AAC (v1&v2), LC-AAC, DD AC3 pass-through (for SDI and HDMI in)
Audio Channel	Up to 2 stereos	Up to 2 stereos
Rate Control	CBR/VBR	CBR/VBR
Aspect Ratio	16:9, 4:3	
Chroma	4:2:0	4:2:0
Video Buffer	Yes	N/A
ASI In & Mux	2 ASI input for remux	2 ASI input for remux
IP out	1 MPTS over UDP / RTP /RTSP	1 MPTS over UDP / RTP /RTSP
Low Delay	150ms - 650ms	N/A
Closed Caption	EIA 608 and EIA 708	EIA 608

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227