

FMUSER FUQ-4337SB SD Video Encoder 48× CVBS Input PAL-NTSC Input Formats IP-ASI Output MPEG4 AVC-H.264 Encoding for CATV Satellite Headend Systems



Product Overview

The FMUSER FUQ-4337SB is a multi-channel SD encoder supporting up to 48 CVBS inputs, with MPEG4 AVC/H.264 video encoding and outputs MPTS and SPTS via IP and ASI interfaces. It processes SD video signals for digital distribution, housed in a modular 1U chassis allowing up to three standalone modules with web-based management. Ideal for digital TV distribution systems like CATV and satellite headends.

Key feature

Supports 16/32/48× CVBS inputs with MPEG4 AVC/H.264 SD video encoding for PAL and NTSC formats.


Features MPEG-1 Layer II audio encoding with adjustable gain and multiple bit-rate options.

Provides MPTS output via ASI and SPTS output over IP with UDP/RTP support, including Null PKT Filter.

Supports logo, caption, and QR code insertion for customized content.

Modular 1U chassis design allows up to 3 standalone modules with web-based management for real-time monitoring and easy updates.

Principle Chart

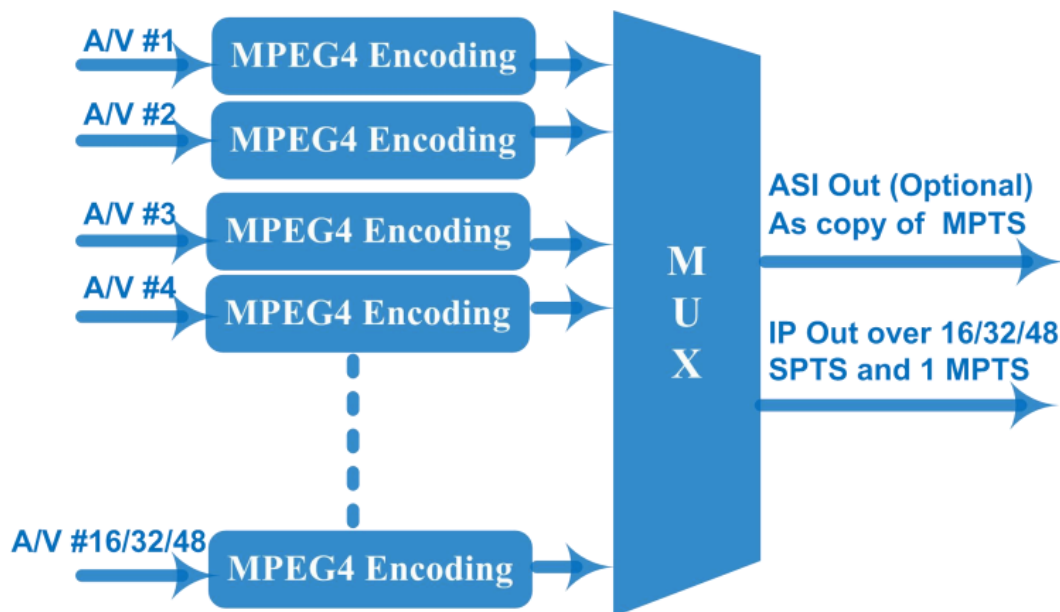

Technical specification

Input	16/32/48 CVBS inputs , DB15-To-RCA interface	16/32/48 CVBS inputs , DB15-To-RCA interface
Video	Resolution	720×576i (PAL-B,D,G,H,I), 720×480i (NTSC-M,J)
Video	Encoding	MPEG4 AVC/H.264(HP/MP/BP)
Video	Bit-rate	1Mbps~66Mbps each channel
Video	Rate Control	CBR/VBR
Video	GOP Structure	IPP (P frame is adjustable)
Video	Aspect Ratio	4:3; 16:9
Audio	Encoding	MPEG-1 Layer 2
Audio	Sampling rate	48KHz

Audio	Resolution	24-bit
Audio	Audio Gain	0-255 adjustable
Audio	Bit-rate	64/128/192/224/256/320/384K bps each channel
Stream output	IP (1*MPTS and 16*SPTS for one module) output over UDP and RTP, 1000 Base-T Ethernet interface (Multicast and unicast)	IP (1*MPTS and 16*SPTS for one module) output over UDP and RTP, 1000 Base-T Ethernet interface (Multicast and unicast)
Stream output	1 MPTS output through 1 ASI output ports, BNC interface (Optional)	1 MPTS output through 1 ASI output ports, BNC interface (Optional)
System function	Network management (WEB)	Network management (WEB)
System function	English language	English language
System function	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	482mm×328mm×44mm
Miscellaneous	Environment	0~45■(work)■-20~80■Stora ge■
Miscellaneous	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

Order Information

	Version I	Version II	Version III
16 CVBS Input	■		
32 CVBS Input		■	
48 CVBS Input			■

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](tel:+8613922702227)