


FMUSER FUQ-4339R-N IP Streaming Encoder 24 HDMI Inputs H.264 AAC Encoding UDP-SRT-RTMP-HLS IP Broadcasting Live Event Streaming



Support IP out over UDP(SPTS) SRT/RTP/RTSP/RTMP/HTTP/HLS

Multiple HDMI inputs

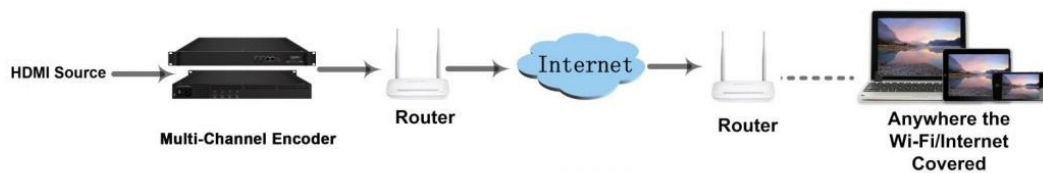


Product Overview

The FMUSER FUQ-4339R-N is a multi-channel network encoder with up to 24 HDMI inputs, supporting H.264 video and AAC audio encoding for IP broadcasting. It processes signals by encoding and streaming via protocols like UDP, SRT, RTMP, and HLS over internet/LAN. Featuring web-based management for control and updates. Ideal for applications in live event streaming to PCs, smartphones, and mobile devices.

Key feature

- Supports up to 24 HDMI inputs with individual SPTS output for flexible channel configuration.
- Features MPEG-4 AVC/H.264 video encoding and AAC audio encoding including LC-AAC, HE-AAC, and AC3 pass-through.
- Enables multiple IP output protocols: UDP (Unicast/Multicast), SRT, RTSP, RTMP, HTTP, and HLS for versatile streaming.
- Offers caption, logo, and QR code insertion with multi-language capabilities for content customization.
- Provides web-based management for easy control, updates, and network administration.

Inner Principle Chart (Per Module)

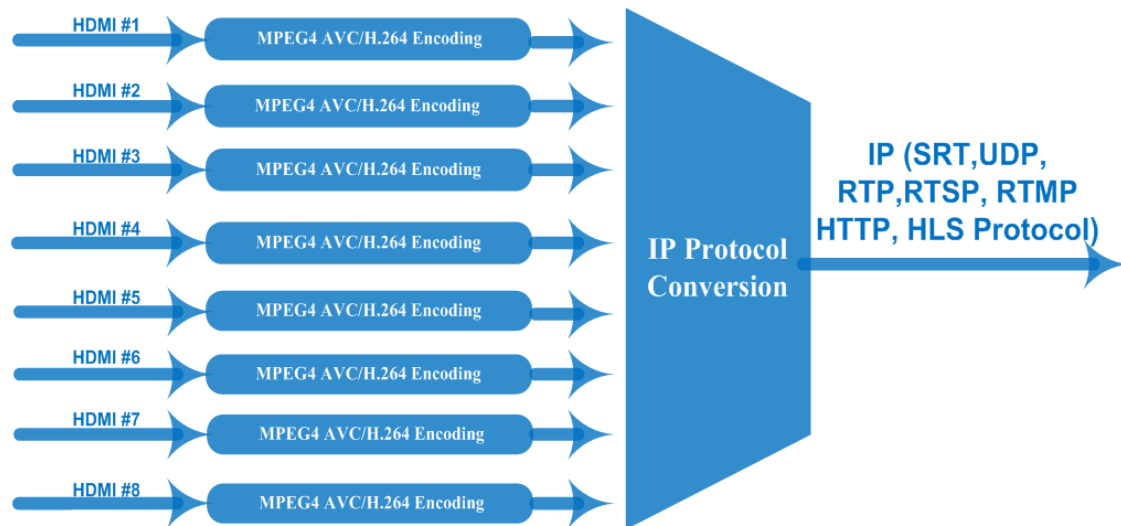

Specifications

Input	8/16/24 HDMI inputs	8/16/24 HDMI inputs	8/16/24 HDMI inputs	8/16/24 HDMI inputs
Video	Resolution	input	input	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720 x 576_50i, 720 x 480_60i
Video	Resolution	Output	Output	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720 x 576_25P, 720 x 480_30P
Video	Encoding	Encoding	Encoding	MPEG-4 AVC/H.264
Video	Bit-rate	Bit-rate	Bit-rate	1~13Mbps each channel
Video	Rate Control	Rate Control	Rate Control	CBR/VBR
Video	GOP Structure	GOP Structure	GOP Structure	IP...P (P Frame adjustment, without B Frame)

Audio	Encoding	Encoding	Encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass through
Audio	Sampling rate	Sampling rate	Sampling rate	48KHz
Audio	Resolution	Resolution	Resolution	24-bit
Audio	Audio Gain	Audio Gain	Audio Gain	0-255 Adjustable
Audio	MPEG-1 Layer 2 Bit-rate	MPEG-1 Layer 2 Bit-rate	MPEG-1 Layer 2 Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
Audio	LC-AAC Bit-rate	LC-AAC Bit-rate	LC-AAC Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
Audio	HE-AAC Bit-rate	HE-AAC Bit-rate	HE-AAC Bit-rate	48/56/64/80/96/112/128 kbps
Stream output	IP out over UDP (Unicast/Multicast), SRT, RTP, RTSP, RTMP, HTTP, HLS (RJ45, 1000M) (8 HDMI inputs with 8 SPTS for each encoder board)	IP out over UDP (Unicast/Multicast), SRT, RTP, RTSP, RTMP, HTTP, HLS (RJ45, 1000M) (8 HDMI inputs with 8 SPTS for each encoder board)	IP out over UDP (Unicast/Multicast), SRT, RTP, RTSP, RTMP, HTTP, HLS (RJ45, 1000M) (8 HDMI inputs with 8 SPTS for each encoder board)	IP out over UDP (Unicast/Multicast), SRT, RTP, RTSP, RTMP, HTTP, HLS (RJ45, 1000M) (8 HDMI inputs with 8 SPTS for each encoder board)
System function	Network management(WEB)	Network management(WEB)	Network management(WEB)	Network management(WEB)
System function	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension (W×L×H)	Dimension (W×L×H)	482mm×328mm×44mm	482mm×328mm×44mm
Miscellaneous	Environment	Environment	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■

Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz
---------------	--------------------	--------------------	--	--

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227