


FMUSER FUQ-4339X-Y Network Encoder 24 HDMI Inputs 1920x1080_60P H.265-H.264 Encoding Multi-Protocol Streaming UDP-SRT-RTMP-HLS Broadcast and Streaming



Support IP out over UDP(SPTS) SRT/RTP/RTSP/RTMP/HTTP/HLS

Multiple HDMI inputs

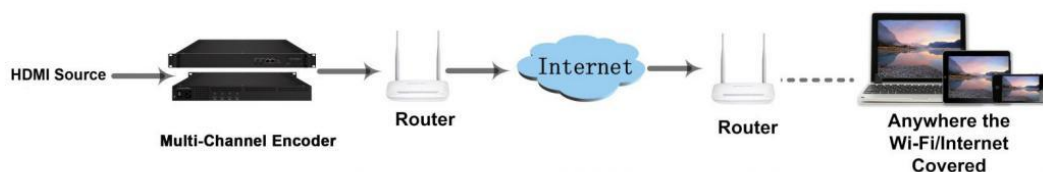

Product Overview

The FMUSER FUQ-433X-Y is a multi-channel network encoder with 24 HDMI inputs and IP streaming output via RJ45. It encodes video using H.265/HEVC or H.264/MPEG-4 AVC compression and streams via protocols like UDP, SRT, RTMP, and HLS. Managed through a web-based interface, it supports remote configuration and software upgrades. Ideal for IP broadcasting to PCs, smartphones, and mobile devices in live streaming and broadcast applications.

Key feature


Supports 24 HDMI inputs with individual SPTS output, handling resolutions up to 1920×1080 at 60P/50P.

Features H.265/HEVC and H.264/MPEG-4 AVC encoding with 1–7 Mbps bitrate, CBR/VBR control, and IP GOP structure.

Enables multi-protocol streaming via UDP (Unicast/Multicast), SRT, RTSP, RTMP, HTTP, and HLS over 1000M RJ45.

Provides flexible audio encoding with MPEG-1 Layer 2, LC-AAC, and HE-AAC, supporting 32–48 kHz sampling and adjustable gain.

Inner Principle Chart (Per Module)

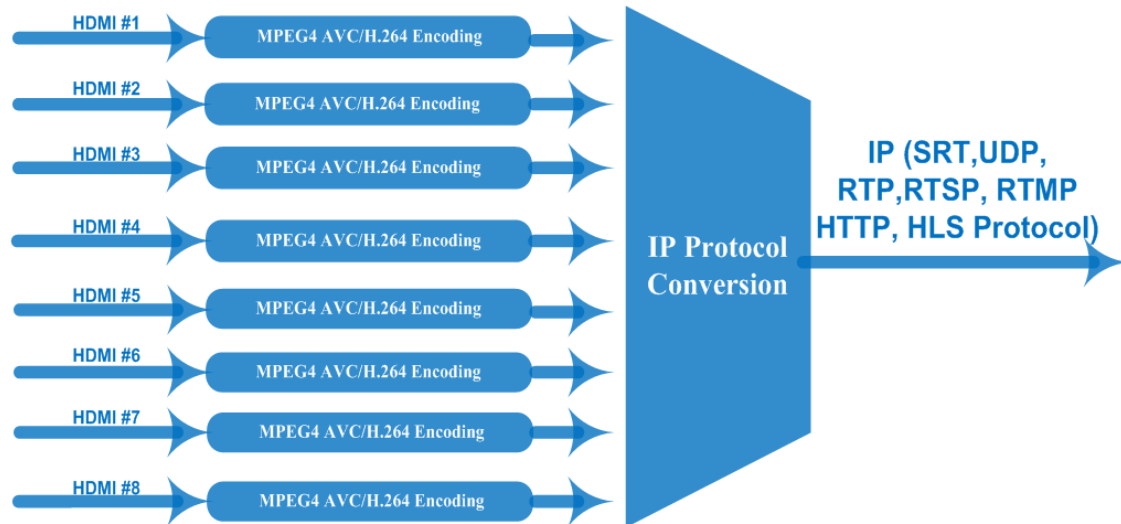

Specifications

Input	2/4/8/16/24 HDMI inputs	2/4/8/16/24 HDMI inputs
Video	Resolution	1920*1080_60P, 1920*1080_50P; 1920*1080_59.94P, 1280*720_60p, 1280*720_59.94, 1280*720_50P
Video	Encoding	H.264/H.265
Video	Bit-rate	1~7Mbps each channel
Video	Rate Control	CBR/VBR
Video	GOP Structure	IP
Audio	Encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass through
Audio	Sampling rate	32KHz, 44.1KHz, 48KHz
Audio	Chroma	4:2:0
Audio	Audio Gain	0-255 Adjustable
Audio	MPEG-1 Layer 2 Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
Audio	LC-AAC Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
Audio	HE-AAC Bit-rate	48/56/64/80/96/112/128 kbps

Stream output	IP out over UDP (Unicast/Multicast), SRT, RTP,RTSP, RTMP, HTTP, HLS (RJ45, 1000M) (8 HDMI inputs with 8 SPTS for each encoder board)	IP out over UDP (Unicast/Multicast), SRT, RTP,RTSP, RTMP, HTTP, HLS (RJ45, 1000M) (8 HDMI inputs with 8 SPTS for each encoder board)
System function	Network management(WEB)	Network management(WEB)
System function	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	482mm×328mm×44mm
Miscellaneous	Environment	0~45■(work)■-20~80■Stora ge■
Miscellaneous	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227